INFUSIONS® Partitions

smooth texture





KEY SELECTION ATTRIBUTES

- Define the look of your space with translucent partitions
- 2' x 6' partitions coordinate with a broad range of interior finishes, as well as with Accent Canopies, Lay-in panels, Walls and Wings in the Infusions family and Acoustical Shapes or Canopies from the SoundScapes® family
- · Standard products create a custom look
- · Hang individually or in groups
- · Panels and installation hardware packaged in one complete kit

$\textbf{COLOR SELECTION-PATTERNS} \quad \text{Due to printing limitations, shade may vary from actual product.}$

Goldtones



Honey Canvas (THC)



Spun Copper (TSC)



Crushed Copper (TCC)

Linens

Linen Gold (TLG)

Arbors



Orange Arbor (TOA)

$\textbf{COLOR SELECTION-PATTERNS} \quad \text{ Due to printing limitations, shade may vary from actual product.}$

SoundScapes® Coordinating Colors





Refined Reef



Refined Lagoon



Refined Plum



Refined Tangerine



Refined Cranberry



Refined Black

In addition to these standard options, panels are available in other colors. Contact the Armstrong Architectural Specialties Project Management Team for details at 1 877 ARMSTRONG and select prompts 1-1-4.



^{*} Colors coordinate with SoundScapes Acoustical Canopies and Shapes. Visit armstrong.com/infusions for more information

INFUSIONS® Partitions

smooth texture



Calculate LEED contribution at armstrong.com/greengenie

PANEL SELECTION

PERFORMANCE

	Item No.*	Dimensions (Inches)		Fire Rating	Warranty
INFUSIONS PAR	RTITIONS				
	5845 ◆	24 x 72 x 1/4"		Class A	1


When specifying or ordering, include the appropriate three-letter color suffix.

NOTE: Ceiling Hanging Kit and Floor Mounting Kit hardware included with panels. Linking Kits must be ordered separately.

ACCESSORIES

Item No.*	Dimensions	Color	Pcs/Ctn
5827	Joining Kit	Silver	3 Clamps

SYSTEM ASSEMBLY

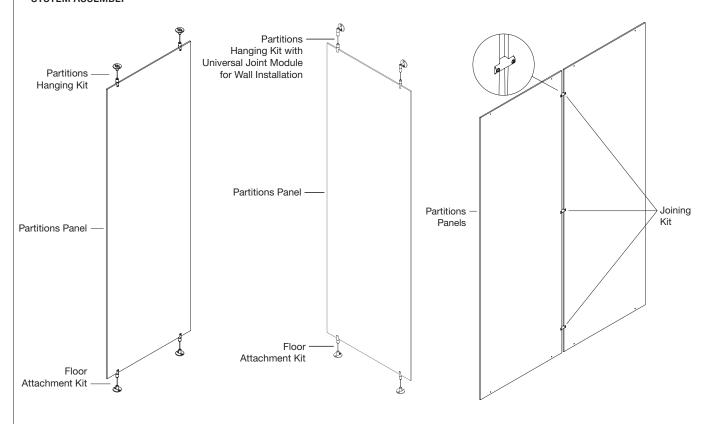

PHYSICAL DATA

Material PETG

Surface Finish

Fire Performance

Infusions panels have been tested according to NFPA 286 and are equivalent to Class A Interior Finish as defined by the International Building Code.

Contact TechLine at 1 877 ARMSTRONG for specific US and Canadian fire performance data.

Installation and Design Considerations

Do not allow panel edges to get wet.

Infusions panels are not approved for exterior application.

Panel kits include ceiling hanging kit and floor mounting kit hardware. Floor mounting hardware is optional, but recommended. Floor mounting hardware requires field drilling pilot holes in panels.

Linking kits must be ordered separately.

Panels can be damaged by exposure to high temperatures. Panel temperature should not be permitted to exceed 100°F.

Warranty

One (1) year limited warranty. See armstrong.com/warranty for details

Weight; Pieces/Carton

Panel weight – 25 lbs 2 pieces/carton Carton weight – 55 lbs

LEED® is a registered trademark of the U.S. Green Building Council TechLineSM / 1 877 ARMSTRONG All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2014 AWI Licensing Company Printed in the United States of America armstrong.com/infusions BPCS-4235-414

