

RODS AND ROD ATTACHMENTS

MALLEABLE ROD COUPLING

Figure 167

REDUCING ROD COUPLING

Figure 167R

The Figure 167 is tapped with a straight bolt thread tap.

The Figure 167R is designed to reduce rod sizes. Couplings are made either to step up or down one rod size.

Finish: Plain, Electro-Galvanized.

Ordering: Specify rod size, figure number, and finish. For Metric applications specify Figure M67 or M167R.

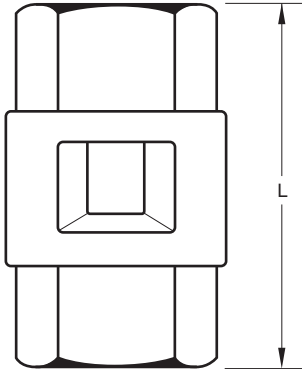


FIGURE 167 – MALLEABLE ROD COUPLING

ROD SIZE	MAXIMUM LOAD	L	WEIGHT EACH
¼	230	1⅜	0.10
M6	1023	35	0.05
⅜	610	1⅝	0.10
M10	2714	41	0.05
½	1130	2⅝	0.18
M12	5027	54	0.08
⅝	1810	2½	0.30
M16	8052	64	0.14
¾	2710	2⅞	0.44
M20	12055	67	0.20
⅞	3770	2¾	0.96
M22	16770	57	0.44
1	4960	2¾	0.94
M24	22064	70	0.43

FIGURE 167R – MALLEABLE REDUCING ROD COUPLING

ROD SIZE	MAXIMUM LOAD	L	WEIGHT EACH
⅝ x ¼	230	1⅜	0.10
M10 x M6	1023	41	0.05
½ x ⅜	610	2⅝	0.18
M12 x M10	2714	54	0.08
⅝ x ¾	1810	2½	0.44
M16 x M20	8052	64	0.20
¾ x ⅞	2710	2⅞	0.96
M20 x M22	12055	67	0.44

ROUND HANGER ROD

Figure 224

Unthreaded steel rod available in a variety of sizes for customer use. Available in up to 20 foot lengths.

Material: Low carbon steel.

Finish: Plain.

Ordering: Specify rod size, length, figure number, and finish. For Metric applications specify Figure M224.



DIMENSIONS		TEMPERATURE	LOADS	WEIGHT
INCHES	FAHRENHEIT		POUNDS	POUNDS
MILLIMETERS	CELSIUS		NEWTONS	KILOGRAMS