

STEEL DRIVE SCREW

Figure 166

Drive Screws are normally used on our Figure 153 Side Beam Connector.


Material: Steel.

Finish: Plain, Electro-Galvanized.

Ordering: Specify size, figure number, and finish. For Metric applications specify Figure M166.

FIGURE 166 – STEEL DRIVE SCREW

SIZE OF SCREW	WEIGHT EACH
1½" NO.12	0.015
2" NO.16	0.03

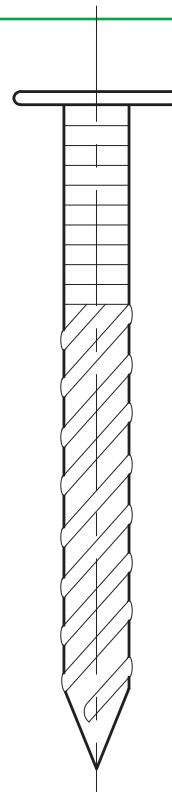

LOCK WASHER

Figure 176

Material: Steel.

Finish: Plain, Electro-Galvanized.

Ordering: Specify rod size, figure number, and finish. For Metric applications specify Figure M176.

FIGURE 176 – LOCK WASHER

ROD SIZE	INSIDE DIAMETER	WIDTH OF STEEL	THICKNESS OF STEEL	WEIGHT EACH
⅜	7/16	0.141	0.094	0.07
M10	11	4	2	0.03
½	9/16	0.171	0.125	0.15
M12	14	4	3	0.07
5/8	11/16	0.203	0.156	0.26
M16	17	5	4	0.12
¾	13/16	0.234	0.188	0.43
M20	21	6	5	0.20



DIMENSIONS		TEMPERATURE	LOADS	WEIGHT
INCHES		FAHRENHEIT	POUNDS	POUNDS
MILLIMETERS		CELSIUS	NEWTONS	KILOGRAMS