


adhesives

F O R T I L E , T R E A D + W A L L B A S E



ile. Sheet. Wall base. Stair treads. Optimum performance starts with quality installation, and FLEXCO® Adhesives position you to get expected results time after time. Epoxy adhesives. Caulking compounds and color-matched caulks. FLEXCO® Adhesives are the perfect match for our products and your production schedule.

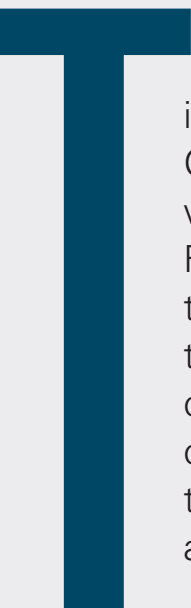

spread rates

1100 wall base adhesive

C G 4

Water-soluble fortified polymer emulsion for installation of rubber and vinyl wall base. Contains an antimicrobial for added protection against mold and bacteria. Also available in 30-ounce cartridges.

Trowel spread:
2-1/2" > 340 lin. ft.
4" > 240 lin. ft.
6" > 180 lin. ft.
Cartridge spread:
2-1/2" > 70 lin. ft.
4" > 50 lin. ft.
6" > 30 lin. ft.

2100 rubber spray adhesive

CASE QTY

FLEXCO® Spray-Grip™ adhesive for rubber tile – low VOC, low odor, sprayable adhesive – uses 80% less adhesive on jobs, and allows immediate foot traffic after rolling. Water-based with 125-150 sq. ft. coverage per can. FloorScore® approved. For use with rubber tile and sheet, Tuflex® Force™ and Prime Sports™ Flooring.

2600 vinyl spray adhesive

CASE QTY

FLEXCO® Spray-Grip™ adhesive for vinyl tile – low VOC, low odor, sprayable adhesive – uses 80% less adhesive on jobs, and allows immediate foot traffic after rolling. Water-based with 150-185 sq. ft. coverage per can. FloorScore® approved. For use with Natural Elements Vinyl Plank and Stone, and Health Design, Appeal and Contract Vinyl Tile.

3100 rubber tile & tread adhesive

G 4

Recommended for the installation of rubber tile, sheet, stair treads, risers and stringers on clean, permanently sound, suspended wood and concrete floors on or above grade. Contains an antimicrobial for added protection against mold and bacteria.

Spread: Approx. 190 sq. ft. per gallon depending on trowel size.

3600 vinyl tile & tread adhesive

G 4

Recommended for the installation of vinyl tile, sheet, stair treads, risers and stringers on clean, permanently sound, suspended wood and concrete floors on or above grade. Contains an antimicrobial for added protection against mold and bacteria.

Spread: Approx. 190 sq. ft. per gallon depending on trowel size.

4100 quik stik tread tape adhesive

Solvent-free double-coated high-tack modified polyacrylate adhesive strips with polyester thread for rubber and vinyl stair treads, risers and stringers.

Coverage: 1" x 164', 4" x 164', and 9.45" x 164' rolls.

color-matched caulks

FLEXCO® color-matched caulks are in stock to coordinate with the colors in our FlexTones® color matching system. They're ideal for touch-ups or hiding installation gaps. Custom colors to match other colors in the line are available.



5100 tread nose compound

C Q

Two-component chemical-set adhesive used for repairing worn stair under steps, 1/2" bead at nosing to ensure 100% backing for nosing.

Spread: Approx. 50 lin. ft. at 1/4" bead per cartridge or 120 lin. ft. per quart.

6100 sports flooring adhesive

2.5 5

One part solvent free moisture-cure polyurethane adhesive recommended for both indoor and outdoor installations of Prime Sports™ flooring and Tuflex® Force™ sports flooring.

Spread: Approx. 90-100 sq. ft. per gallon with a 1/16" x 1/16" square notched trowel on a smooth substrate.

7100 low viscosity adhesive

Q G

Two-part recommended for the installation of rubber and vinyl resilient flooring on porous and nonporous substrates on grade, above grade or below grade, and in areas where flooring is subjected to lateral shear stresses.

Spread: Approx. 175 sq. ft. per gallon with a 1/32" x 1/16" x 1/32" trowel.

7200 urethane epoxy adhesive

Q G

Two-part recommended for the installation of rubber and vinyl resilient flooring on porous and nonporous substrates on grade, above grade or below grade, and in areas where flooring is subjected to lateral shear stresses.

Spread: Approx. 175 sq. ft. per gallon with a 1/32" x 1/16" x 1/32" trowel.

8100 acrylic ESD adhesive

G 2

Designed to install FLEXCO® Solid Vinyl and Rubber ESD tiles in applications where an epoxy is not required. Formulation that allows for faster installations.

Spread: Approx. 140-150 sq. ft. with 1/16" x 1/16" x 1/16" square notch trowel.

* See online spec sheets for the latest adhesives technical information.

* 2100, 2600, 5100 and 7100 adhesives cannot be shipped air.

8200 epoxy ESD adhesive

Q G

Two-component chemical-set adhesive for installation of conductive and static dissipative tile only.

Spread: Approx. 150 sq. ft. per gallon with a 1/32" x 1/16" x 1/32" trowel.