

## PIPE ATTACHMENTS

### PVC COATED ADJUSTABLE SWIVEL RING

#### Figure 800PVC

Designed for the support of non-insulated static pipe lines and to protect the pipe from coming into direct contact with the hanger by having the contact surface PVC coated.. The swivel nut is knurled to provide a gripping surface when adjusting the pipe elevation.

**Compliance:** Federal Specification A-A-1192A Type 10, MSS SP-69 Type 10, Underwriters Laboratory listed, and Factory Mutual approved (3/4" through 8").

We also offer Swivel Ring hangers that are for Copper Tubing (Figure 800CT) and for NFPA requirements (Figure 800FP) in this catalog.

Operating temperature should not exceed 140° F / 60° C.

**Material:** Carbon Steel.

**Finish:** Electro-Galvanized.

**Ordering:** Specify pipe size, and figure number.

For Metric applications specify Figure M800PVC.

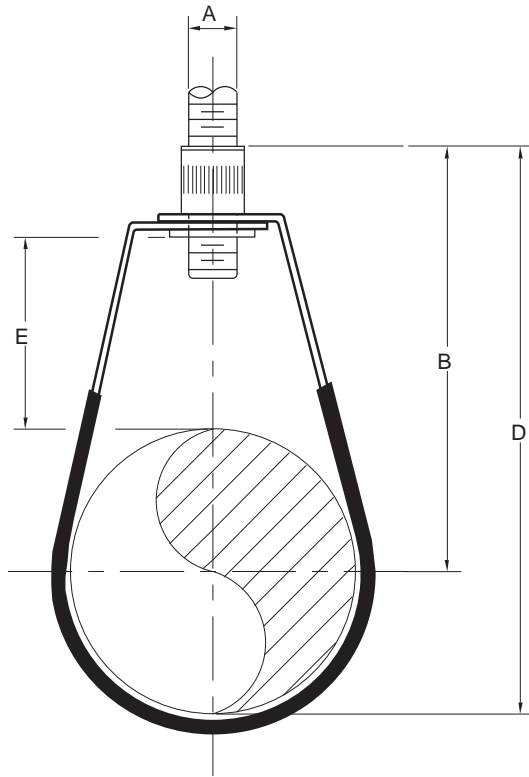


FIGURE 800PVC - PVC COATED ADJUSTABLE SWIVEL RING

PIPE SIZE	MAXIMUM LOAD	A	B	D	E	WEIGHT EACH
½	300	⅜	2¼	3⅙	1⅙	0.11
10	1335	M10	70	78	37	0.05
¾	300	⅜	2½	3⅙	1⅙	0.13
20	1335	M10	64	78	29	0.06
1	300	⅜	2½	3⅙	1	0.13
25	1335	M10	64	81	25	0.06
1¼	300	⅜	2⅞	3⅙	1⅙	0.15
32	1335	M10	71	90	27	0.07
1½	300	⅜	3⅝	3⅝	1⅙	0.17
40	1335	M10	79	98	27	0.08
2	300	⅜	3⅞	4⅝	1⅝	0.18
50	1335	M10	84	111	29	0.08
2½	600	½	3⅞	5⅝	1¼	0.34
65	2669	M12	94	130	32	0.15
3	600	½	4	5⅝	1⅝	0.39
80	2669	M12	102	149	29	0.18
3½	600	½	4⅞	6⅝	1½	0.42
90	2669	M12	110	168	38	0.19
4	1000	⅝	4⅞	7⅝	1¼	0.48
100	4448	M16	125	181	32	0.22
5	1000	⅝	5⅝	8½	1⅝	0.69
125	4448	M16	143	216	35	0.31
6	1250	¾	6⅞	10⅝	2	1.13
150	5560	M20	170	257	51	0.51
8	1800	⅞	8⅞	12⅝	2⅝	1.29
200	8007	M22	211	327	67	0.59

DIMENSIONS	TEMPERATURE	LOADS	WEIGHT
INCHES	FAHRENHEIT	POUNDS	POUNDS
MILLIMETERS	CELSIUS	NEWTONS	KILOGRAMS