


INFUSIONS® Sheets

Lay-in

smooth texture

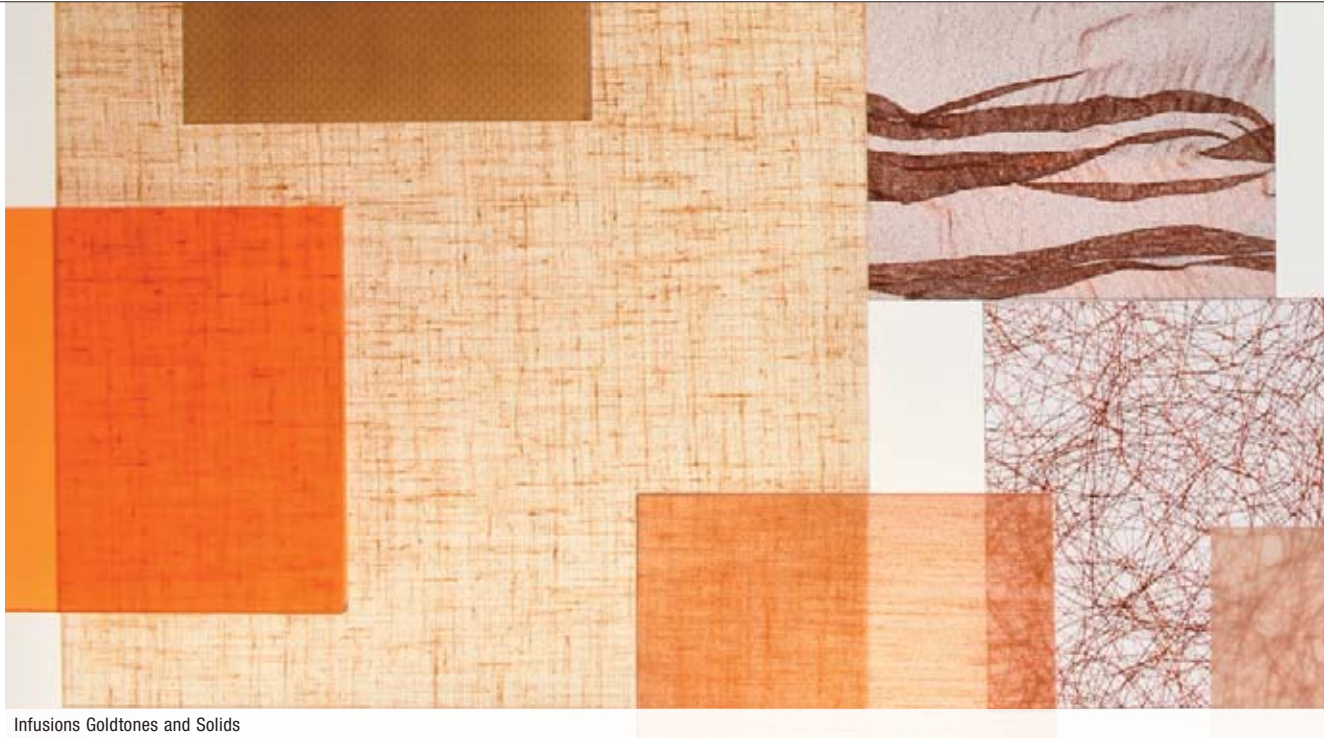

Infusions Goldtones and Solids

KEY SELECTION ATTRIBUTES

- Choose from over 40 patterns and colors
- Two standard sizes – 4' x 8' PETG and 4' x 6' Polycarbonate
- 40% recycled content for PETG panels
- Coordinate with Infusions Canopies, Lay-in panels, and Partitions
- Custom cut shapes and sizes available; contact Armstrong Architectural Specialties Project Management Team for details at 1 877 ARMSTRONG, selection options 1-1-4

TYPICAL APPLICATIONS

High visibility and focus areas, including:

- Desk/bar fronts
- Dividers
- Wall art

COLOR SELECTION – PATTERNS Due to printing limitations, shade may vary from actual product.

Goldtones



Honey Canvas (THC)



Spun Copper (TSC)



Crushed Copper (TCC)

Linens



Linen Gold (TLG)



Natural Linen (TNL)**



Blue Linen (TBL)**

Crystallines



Crystalline Focus (TCR)



Crystalline Silverado (TSV)



Crystalline Sky (TSY)

Tones-on-tones



White Circlets (TWC)



Silver Orbit (TSR)



Indigo Surf (TNS)

Arbors



Clear Arbor (TCA)



Blue Arbor (TBA)



Orange Arbor (TOA)




Red Arbor (TRA)

INFUSIONS® Sheets

Lay-in

smooth texture

COLOR SELECTION – SOLIDS Due to printing limitations, shade may vary from actual product

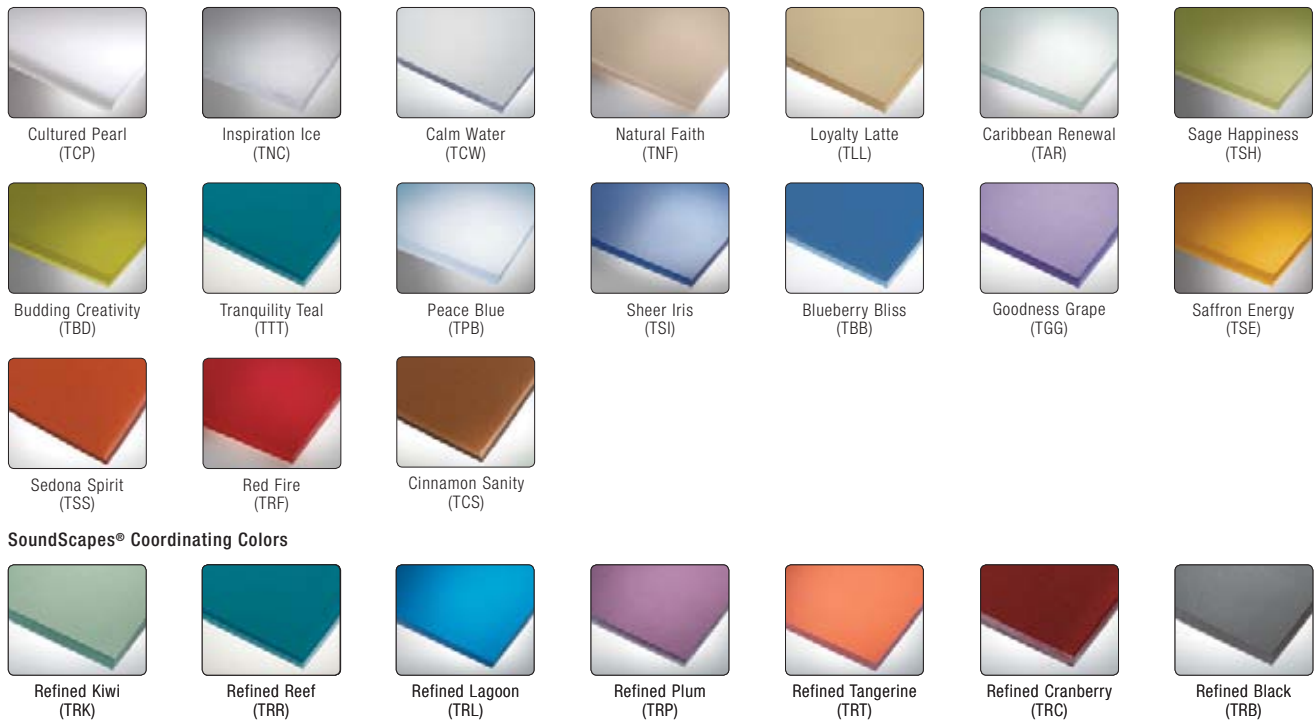

SoundScapes® Coordinating Colors

* Colors coordinate with SoundScapes Acoustical Canopies and Shapes. Visit armstrong.com/infusions for more information

TRANSLUCENT MATERIALS

PANEL SELECTION

Item No.*	Dimensions (Inches)
INFUSIONS SHEETS – POLYCARBONATE 5976_ _ _ ♦	48 x 72 x 1/4"
INFUSIONS SHEETS – PETG 5978_ _ _ ♦	48 x 96 x 1/4"

PERFORMANCE

Fire Rating	Warranty
Class A	1
Class A	1

♦ When specifying or ordering, include the appropriate three-letter color suffix. Example 5976 T C R

PHYSICAL DATA

Material
Polycarbonate and PETG. Custom panels are available in multiple sizes up to 2" thick in 1/8" increments. For more information, contact the Armstrong Architectural Specialties Project Management Team at 1 877 ARMSTRONG and select options 1-1-4.

Surface Finish
Smooth

Fire Performance

Infusions panels have been tested according to NFPA 286 and are equivalent to Class A Interior Finish as defined by the International Building Code.

Contact TechLine at 1 877 ARMSTRONG for specific US and Canadian fire performance data.

Design Considerations

Direction of linear patterns may change between panel sizes. Infusions panels are not approved for exterior application. Natural Linen and Blue Linen colors may vary panel to panel.

Installation Considerations

Do not allow panel edges to get wet. Panels may be cut. For penetrations it is recommended that you use an escutcheon plate to hide any rough cut edges. Any fixtures used in or adjacent to field-cut Infusions panels must be independently supported. There is potential for some limited natural deflection of panels. See LA-297176 on our website at armstrong.com/infusions for cutting recommendations.

Direction of linear patterns may change between panel sizes.

Infusions panels are not approved for exterior application. Panels can be damaged by exposure to high temperatures. Panel temperature should not be permitted to exceed 100°F.

Infusions Sheets should not be installed in the ceiling or in horizontal applications. Panels may be installed vertically per the installing contractor's recommendations. Installation instructions will not be provided.

Follow these guidelines for minimum distance from standard light sources.

LAMP TYPE	LABEL WATTAGE	MINIMUM DISTANCE
Halogen FL XL PAR 30	60	14"
Incandescent Bulb	120	15"
Quartz Halogen Work Light	500	23"

Additional light transmission information is available at armstrong.com/infusions

Warranty

One (1) year limited warranty. See armstrong.com/warranty for details

Weight; Pieces/Carton
Item 5976 – 1.63 lbs/SF
Item 5978 – 2.08 lbs/SF
Bulk package per order