### **AD-16**


## Compact Diaphragm Valves



#### Standard Features (Sizes 1/2" - 2")

- Compact design for tight installations
- Robust design for high cycle life
- Ideal for OEM equipment and skids
- Highly configurable option

#### **Options**



Manifolds



Travel Stop

#### Specifications

Size: 1/2" to 2"

**Body Material: PVC Bonnet Material: PVC** 


Diaphragm: PTFE (Stock), EPDM (Special Order) Connections: IPS Socket, Female NPT, Flanged

(All True Union)

Operation: Air-to-Spring Closed, Air-to-Air

Pilot Port: 1/8" FNPT

# *Oymatrīx™*

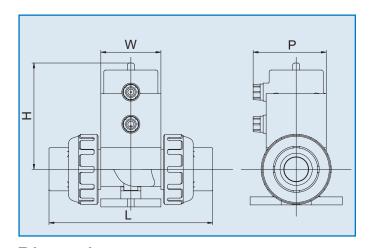

#### **Dimensions** (in.)

Size	Flanged	Threaded	Socket			
	L	L	L	Н	W	P
1/2	6.22	4.61	4.65	3.11	1.97	2.48
3/4	7.52	5.47	5.43	4.25	2.36	2.87
1	8.09	5.87	5.89	4.29	2.36	2.87
1-1/2	10.39	8.46	8.50	6,36	3.74	4.23
2	11.69	10.24	10.24	7.42	4.53	5.04

