


HI-PE Multi-Zone



GSA Contract Holder

HIGH PERFORMANCE WALK-THROUGH METAL DETECTOR

- High level of Detection Uniformity
- Highly visible double Display provides single or multiple location of metal objects in transit
- Very high speed of Detection
- High Immunity to external interferences
- High Reliability
- Local or Remote Programming with networking capabilities

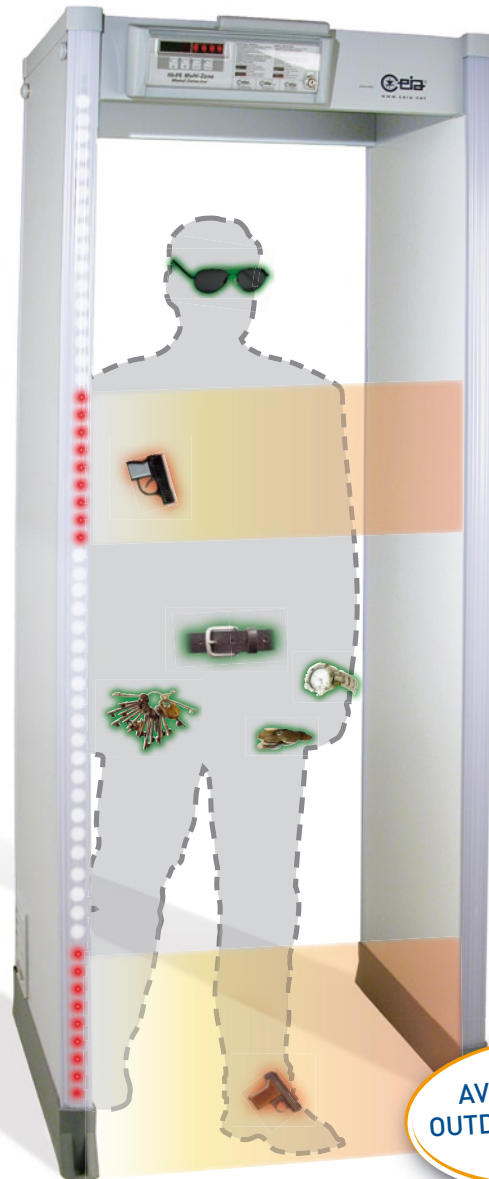

AVAILABLE IN
OUTDOOR VERSION
(IP65)



THE HI-PE MULTI-ZONE IS MANUFACTURED USING THE MOST ADVANCED ELECTRONICS TECHNOLOGY



HIGH DISCRIMINATION AND FLOW RATE

The HI-PE Multi-Zone is a high performance walk-through Metal Detector which exceeds all International Security Standards. A "height on person" display actually indicates, by means of illuminated LED's, the position of the weapon on the person.

Three operating modes are available: **Floating** (standard), the location zones are not fixed, as in the case of metal detectors with multiple receiver-transmitter coils, but are variable and continuous so as to achieve optimum resolution; **8-Zones** and **4-Zones**, the alarm threshold can be adjusted individually for each zone. ▶



www.ceia-usa.com

HI-PE Multi-Zone



The HI-PE Multi-Zone allows a **high level of discrimination** between significant metal masses, such as the weapons which are to be detected, and personal metal items.

Extremely high levels of immunity to external interference, making it easy to use even when external electrical noise is encountered. **The sensitivity is independent of the transit speed.**

MAIN FEATURES

- IMMEDIATE SELECTION OF INTERNATIONAL SECURITY STANDARDS**
- DETECTION OF MAGNETIC, NON-MAGNETIC AND MIXED ALLOY METAL WEAPONS**
- HIGH DETECTION SPEED** up to 15 m/s [45 ft/s]
- EXCEPTIONAL IMMUNITY** to electromagnetic and mechanical interference
- PROGRAMMABLE OPERATION** controlled by microprocessor
- PROGRAMMING** via built-in keypad and display or RS-232 serial connection to Remote Control Unit (RCU2), a PC or a computer network
- PROGRAMMING ACCESS** protected by both a mechanical lock and two alphanumeric passwords
- MULTIPLE INSTALLATIONS:** automatic synchronization between two or more metal detectors with a reciprocal distance of down to 2" [5 cm] without the use of cables
- PROFESSIONAL HIGH INTEGRATION AND HIGH RELIABILITY ELECTRONICS**
- CONTROL UNIT** incorporated into the detector
- No initial or periodic calibration
- EASY MAINTENANCE:** modular control unit for a rapid replacement
- Color: light grey RAL 7040

INSTALLATION DATA

- POWER SUPPLY:** 115 / 230 VAC, $\pm 15\%$, 45 \div 65 Hz, 30 VA max
- EXTERNAL INTERFACE:** RS-232C for connection to a Remote Control Unit (RCU2), a terminal, a computer, an external modem or other CEIA Metal Detectors
- PROTECTION DEGREE** Indoor Model: IP20 - IEC529
Outdoor Model: IP65 - IEC529
- OPERATING TEMPERATURE:** -4°F to 158°F
- STORAGE TEMPERATURE:** -31°F to 158°F
- RELATIVE HUMIDITY:** 0 to 95% (without condensation)

ALARM MODES

- VISIBLE SIGNALS** Multi-zone display bar for "height on person" localization
High intensity display
Green and red metering signals proportional to the mass of the object detected
- AUDIBLE SIGNALS** High acoustic intensity alarm signal
Volume and tone of alarm signal can be programmed

The detector's control unit is incorporated into the structure. Access to programming is protected both by a mechanical lock and by two alphanumeric passwords. The panels are washable and are equipped with shock absorbent edges to protect them against damages.

The HI-PE Multi-Zone is manufactured using the most advanced electronics technology, **conforming to ISO 9001 Quality Control Standard procedures.**

CERTIFICATION AND CONFORMITY

Complies with Regulations relating to pacemakers, defibrillators or other vital support systems, pregnant women and magnetic storage media (floppy disks, audio cassettes, video cassettes and similar)

Conforms to the current International Security Standards for Walk-Through Metal Detectors

Complies with EC Regulations and International Standards relating to Electrical Safety and Electromagnetic Compatibility (EMC)

ACCESSORIES / OPTIONS

EMERGENCY BATTERIES

RCU2: the console provides complete remote control of CEIA Walk-Through Metal Detector functions



MDNC-1: Ethernet network interface for CEIA Metal Detectors

MBSU-1 Unit is a portable device designed to supply CEIA Metal Detectors in outdoor applications or in situations where mains power supply is unavailable



MD SCOPE: software for oscilloscope simulation and terminal operation on CEIA MDs

METAL DETECTOR

DIVESTING TABLE: this article acts both as a spacer between the X-ray unit and the Metal Detector and as a temporary depository for metal personal effects



APSIM: connection module with Anti-tamper on/off switch and Ethernet interface



PHOTOCELL TRANSIT COUNTER and automatic alarm rate calculation



OUTDOOR VERSION, waterproof degree IP65



GREEN AND RED METERING SIGNALS PROPORTIONAL TO THE METAL MASS DETECTED


UNDER THE ALARM THRESHOLD

- Small metal mass
- Medium metal mass

OVER THE ALARM THRESHOLD


- Medium metal mass
- Large metal mass

VISUAL ALARM ZONE INDICATION

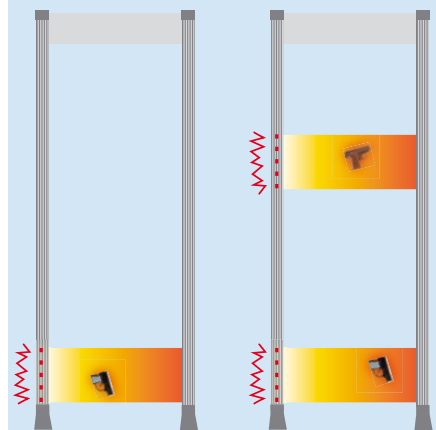

SINGLE & MULTIPLE LOCATION OF THE METAL MASS DETECTED

DIMENSIONS

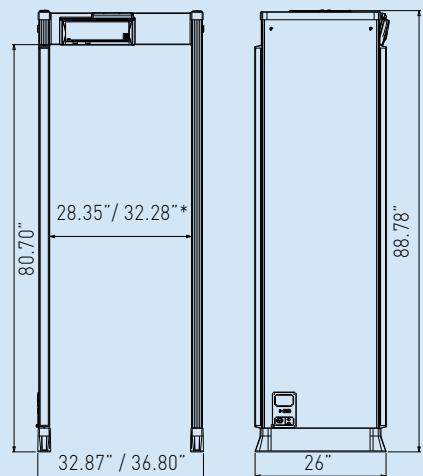

* AVAILABLE ON REQUEST



CEIA USA Ltd - 9155 Dutton Drive, Twinsburg OH - 44087 USA
Phone: 330-405 3190 - Fax 330-405 3196 - e-mail: sales@ceia-usa.com

www.ceia-usa.com

CEIA USA reserves the right to make changes, at any moment and without notice, to the models (including programming), their accessories and options, to the prices and conditions of sale

Call 888-532-CEIA

DP040K0003v1000US-44808