

# AUTOMATIC SPRINKLERS


## EXTENDED COVERAGE SPRINKLERS

### ELOC

#### Concealed Pendent

- Light hazard
- Extra Large Orifice Concealed (ELOC) Pendent Sprinklers are decorative, fast response solder type sprinklers featuring a flat cover plate designed to conceal the sprinkler
- Covers 400 sq. ft. (37,2 m<sup>2</sup>) using less pressure than a standard 1/2" (12,7 mm) sprinkler at 225 sq. ft. (20,3 mm)
- Available with optional dust and air seal
- Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration

<b>K FACTOR</b>	K=11.2 (161,3)
<b>THREAD SIZE</b>	3/4" NPT
<b>APPROVALS</b>	UL, C-UL, NYC
<b>TEMPERATURE</b>	160°F/71°C - Sprinkler 139°F/59°C - Cover Plate, 212°F/100°C - Sprinkler 165°F/74°C - Cover Plate
<b>COVER PLATE FINISH</b>	Chrome Plated, Brass Plated, Signal White, Grey White, Custom
<b>SIN</b>	TY5522
<b>TECH DATA</b>	TFP250

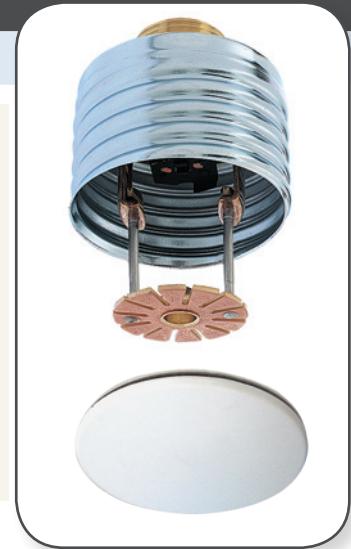


Sprinkler Wrench  
W-TYPE 18

### RFII (ROYAL FLUSH II)

#### Concealed Pendent

- Light hazard
- 3 mm bulb
- Maximum 20' x 20' (6,1 m x 6,1 m) QR Listing
- Concealed in an enclosed escutcheon plate with flat cover for use in those applications where aesthetics is a primary consideration
- Separable, two-piece design of the mounting cup and cover allows installation of the sprinklers and pressure testing of the fire protection system prior to installation of a suspended ceiling or application of the finish coating to a fixed ceiling
- Internally threaded closure with 1/2" (12,7 mm) of adjustment

<b>K FACTOR</b>	K=5.6 (80.6)
<b>THREAD SIZE</b>	1/2" NPT
<b>APPROVALS</b>	UL, C-UL, NYC
<b>TEMPERATURE</b>	155°F/68°C - Sprinkler 139°F/59°C - Cover Plate, 200°F/93°C - Sprinkler 165°F/74°C - Cover Plate
<b>COVER PLATE FINISH</b>	Chrome Plated, Brass Plated, Signal White, Grey White, Custom
<b>SIN</b>	TY3532
<b>TECH DATA</b>	TFP260

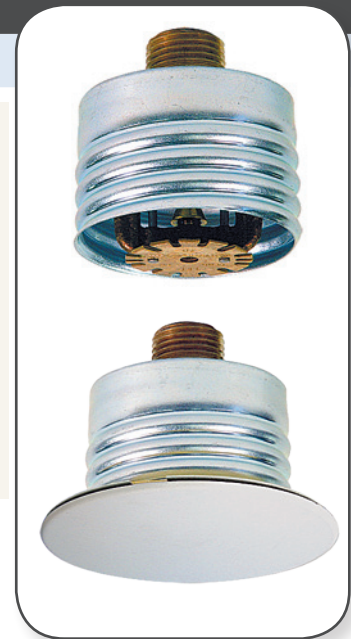

Sprinkler Wrench  
RFII

Always refer to the product's Technical Data Sheet for a complete description of all Listing and Approval criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.