

AUTOMATIC SPRINKLERS

DRY SPRINKLERS

DS-3

Extended Coverage Horizontal Sidewall

- EC ordinary hazard
- 3 mm bulb
- Lengths to 48" (1220 mm)
- Designed for use in applications where sprinklers and/or connecting piping may be exposed to freezing conditions, or the sprinkler system is seasonally drained
- Ideal for Exterior Loading Docks and Covered Areas and can eliminate the need for dry or anti-freeze systems

K FACTOR	K=11.2 (161,3)
INLET THREAD CONNECTION	1" NPT (Standard Order) ISO 7-R1
APPROVALS	UL, C-UL
TEMPERATURE	155°F/68°C, 200°F/93°C
ESCUTCHEON FINISH	Signal White, Chrome Plated, Brass Plated
SPRINKLER FINISH	Natural Brass, Chrome Plated, Signal White
SIN	TY5339
TECH DATA	TFP550



Sprinkler Wrench



DSB-2

Dry Sprinkler Boot (For Use With TFP Dry Type Sprinklers)

- Helps to close the air gap created by the clearance hole through a wall or ceiling through which the dry type sprinkler has penetrated
- Helps to stop the air exchange between the inside and outside of the freezer (or any other type of similar construction) to help prevent transfer of moist air into the freezer space

INCLUDES	1 Boot, 2 Strap Ties, and 1/3 oz. of Adhesive <i>(quantity of adhesive is sufficient for installing 1 Boot)</i>
TECH DATA	TFP591




G5

DS-1 Dry Sprinkler Guards

- The TYCO Model G5 Sprinkler Guards are designed to be used in areas that make the sprinklers susceptible to mechanical or physical damage
- For use with Series DS-1 Dry Sprinklers standard, deep and no escutcheons

APPROVALS	UL
FINISH	Zinc Chromate
TECH DATA	TFP783

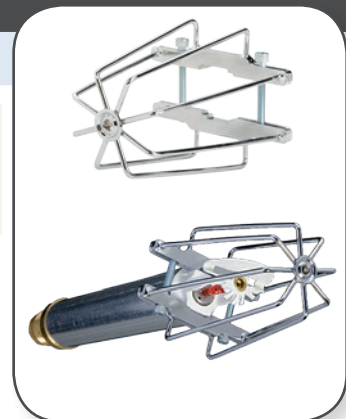

Always refer to the product's Technical Data Sheet for a complete description of all Listing and Approval criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.