

B7TURBO

HD 720p Turbo HD Bullet Camera


► Camera

Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1280(H) * 720(V)
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30)s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm optional) Angle of view: 76.88° (3.6mm), 99.73°(2.8mm), 50.1° (6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	25 fps (PAL) / 30 fps (NTSC)
HD Video Output	1 Analog HD output
S/N Ratio	More than 52dB



► General

Working Temperature / Humidity	-40°C - 60°C (-40°F - 140°F) Humidity 90% or less (non-condensing)
Power Supply	12VDC
Power Consumption	Max. 3.5W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Dimensions	φ70×149.5 mm (φ2.76" ×5.89")
Weight	360 g (0.79 lb)

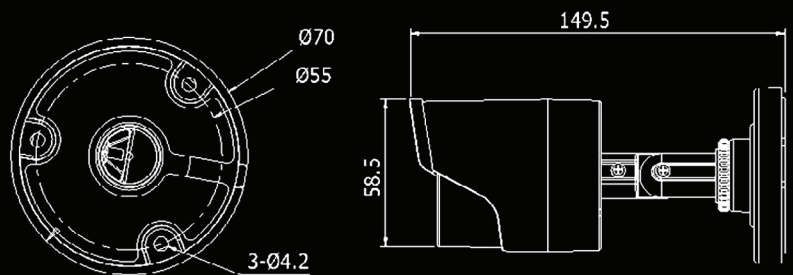

Unit: mm

► Key Features

HD720P Video Output
Adopt HDTVI Technology
True Day/Night
DNR, SmartIR
20m IR Distance
IP66 Weatherproof



epcom[®]
POWERED BY HIKVISION

EVTURBOHD
series