

suprema FaceStation

Next Generation Face Recognition Terminal



| FaceStation

The new FaceStation is a dedicated face recognition terminal which provides a perfect combination of convenience and high security. Optimizing Suprema's renowned biometric technology combined with state-of-the-art hardware, FaceStation allows fast and accurate access control security like no other product in the market. FaceStation comes with a wide array of features & functions, which can be assessed through a intuitive touch screen GUI. The device also supports both analog and digital video phone integration.









suprema FaceStation

Next Generation Face Recognition Terminal



Features

- 
Intelligent Face Recognition Technology
 Allows fast & easy recognition with higher security
- 
Intuitive Touch Screen GUI
 4.3" touchscreen LCD with easy-to-use GUI
- 
Ultra Performance
 Covers up to 10,000 users with powerful dual CPU
- 
Versatile Interfaces
 PoE, WiFi, TCP/IP, RS485/232, Wiegand, relay
- 
Video Phone
 IP based video and audio interface or analog video phone
- 
Built-in Card Reader
 13.56MHz Mifare/DesFire

Intuitive touch screen GUI of FaceStation



Specifications

CPU	1.1 GHz DSP, 667MHz RISC
Memory	4GB flash, 512MB RAM
LCD	4.3 inch WVGA touch screen
Camera	Face recognition, face log, videophone
RF Card Options	13.56MHz Mifare/DesFire
Template Capacity	10,000 (1:1), 1,000 (1:N)
Max User	10,000
Log Capacity	1,000,000 / 10,000 image logs
PoE	Yes
Interfaces	Wireless LAN(optional), TCP/IP, Wiegand 2ch RS485, RS232, 4 x TTL I/O, 2 x Relay USB (Host & Slave)
Tamper	Switch
Sound	16 bit Hi-Fi voice & sound indication
Operating Temp.	- 20°C ~ 50°C
Operating Voltage	12V DC
Dimensions (mm)	132(W) x 165(H) x 60(D)
Certificates	CE, FCC, KCC, RoHS

Secure I/O


- External Relay unit for secure door control and I/O expansion

- Encrypted communication for enhanced security

- * 16MHz 8 bit microprocessor
- * 4 digital inputs and 2 relay outputs
- * Dimension :
143 x 82 x 35 mm (W x H x D)



System Configuration

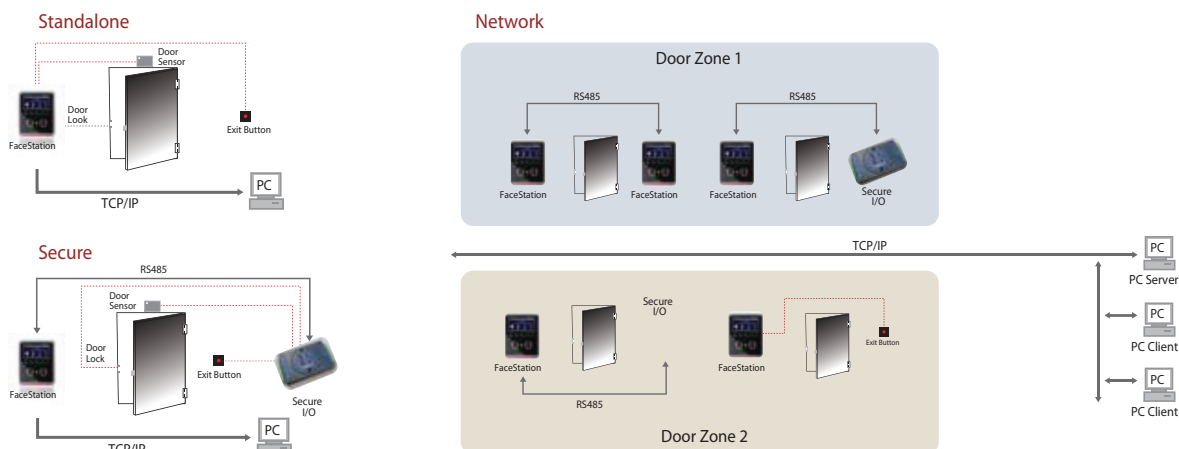


ACROSOFT
 Wholesale Distributor
 salesLA@acrosoft.net
 www.acrosoft.net

Tel.: 305.477.4674
 305.479.2303
 Fax.: 305.477.4673
 Acrosoft LLC
 10800 NW 21 ST Suite, No. 150
 Miami, Florida 33172



FCSB-1312131-REV1
 Subject to changes without notice.