

EcoWash EWR-25

25-lb Capacity Rigid Mount/200 G-Force Coin Washer/Extractor

Features and Benefits:

- Coin or Card Ready
- Inverter Driven Motor
- Heavy-Duty Structural Tube Construction
- Stainless Steel Cabinet
- Easy to Program and Easy to Use Controls
- Load Imbalance Detection Before Spinning
- Large, Convenient Supply Dispenser
- Flexible Water Level Settings
- Ergonomic, Easy-Grip Door Handle

Why Purchase ADC EcoWash?



Rugged Structural Tube Construction

EcoWash rapid spin washer/extractors are constructed with a structural tube design frame in combination with a heavy-duty cast aluminum counter weight to provide superior strength and maximum stability throughout the wash cycle.

Durable Door Safety Lock and Handle

The durable ergonomic design of the door handle combined with our Easy Lock™ door lock provides maximum convenience and safety.

Large, Convenient Supply Dispenser

Easy to use, this large supply dispenser allows you to conveniently load your detergent, bleach and fabric softeners before starting your wash cycle.

Disconnect

All Ecowash washers feature a standard quick disconnect for immediate power shutoff to your washer, eliminating the need for any additional cost of an external disconnect. This quick disconnect provides lockout/tagout capability to meet OSHA standards when performing preventative maintenance.

Your local ADC independent authorized distributor




EWR-25 Coin Washer/Extractor


EcoWash EWR-25

200 G-Force Rapid Spin Washer-Extractor


Features	EWR-25
DRUM	
Load Capacity (lb/kg)	25 / 11.3
Drum Volume (cu. ft./liter)	3.53 / 100
Drum Diameter (in/mm)	21 / 532
Drum Depth (in/mm)	16-3/4 / 425
DIMENSIONS	
Width (in/mm)	27-1/4 / 692
Depth (in/mm)	31-1/8 / 790
Height (in/mm)	45-3/4 / 1162
Weight (lb/Kg)	458 / 208
DIMENSIONS WITH PACKAGING	
Crated Width (in/mm)	29-1/8 / 739
Crated Depth (in/mm)	38-1/8 / 968
Crated Height (in/mm)	53-3/4 / 1365
Crated Weight (lb/Kg)	488 / 221
DOOR	
Height to Bottom of Door	16-1/2 / 419
Door Opening Diameter (in/mm)	11-1/2 / 292
ELECTRICAL REQUIREMENT	
Voltage/Phase	208-240 / 1, 3ø
Full load current / Breaker (amps) - 1ø	5.26 / 15
Full load current / Breaker (amps) - 3ø	3.88 / 15
CONNECTIONS	
Water Inlet (in/mm)	3/4 / 19.05
Steam Inlet (in/mm)	1/2 / 12.7
Drain (in/mm)	3 / 76.2
CYLINDER SPEED	
Washing speed (r.p.m.)	50
Spinning speed (r.p.m.)	820
G-Force	200

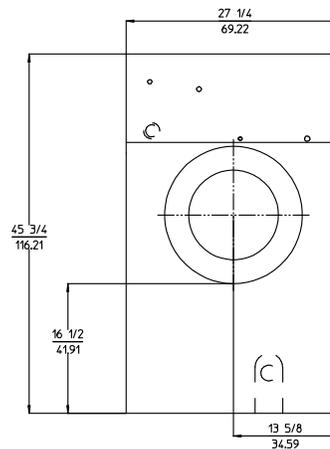

FRONT VIEW

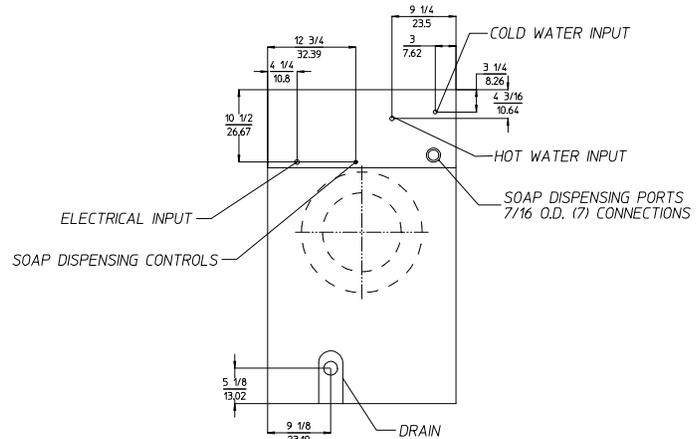

BACK VIEW

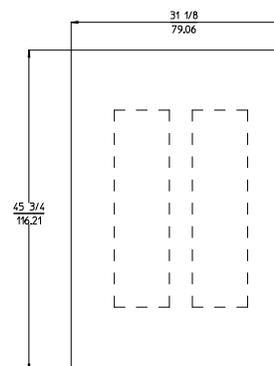

SIDE VIEW



Intuitive Micro Controls (IMC®) That Makes Washing Easy For You and Your Customers

Intuitive Micro Controls (IMC®) is our programmable microprocessor that is customizable, easy to program and easy to use. You can simplify existing programs; modify or delete the temperature and times of each phase of the cycle, as well as modify water levels to achieve maximum savings in your Laundromat. Multi vend pricing capability also enables you to maximize your Laundromat's revenue.



88 Currant Road Fall River, MA 02720-4781 • 508.678.9000 • Fax: 508.678.9447 • Email: sales@amdry.com

P/N 450640 02/12
REV 1/29/13

* Specifications are subject to change without notice or obligation. Contact ADC for dimensions not shown or for clarification.

www.amdry.com