

# TT101TURBO

TurboHD Transmission

**epcom**<sup>®</sup>  
POWERED BY HIKVISION

## ► Introduction

TT101TURBO is a passive high definition transmitter, small size and easy installation, transmission distance of color signal up to 200m, it is very suitable for middle distance video surveillance, such as office building, community, school and hospital etc.

## ► Compatibility

Fully compatible with TurboHD and traditional analog cameras and DVRs.

## ► Product Terminal and Dimension Introduction

- (1) VIDEO IN
- (2) VIDEO + CUP(UTP Cable)
- (3) VIDEO - (UTP Cable)

## ► Product Installation Instructions

Connect the video signal to BNC terminal of transmitter.


Selected a pair of UTP Cable (must be same color) connect to the transmitter VIDEO +/- port and receiver VIDEO +/- port.

Connect the video signal of receiver to display device.

## ► Specifications

Bandwidth	DC0 to 60MHz
Impedance	75Ω to 100Ω
Differential Gain	<2%
Differential Phase	<2%
Connectors	BNC to Spring compression wire terminals
Temperature	Operating: -25°to 70°C Humidity < 95%

## ► Dimensions

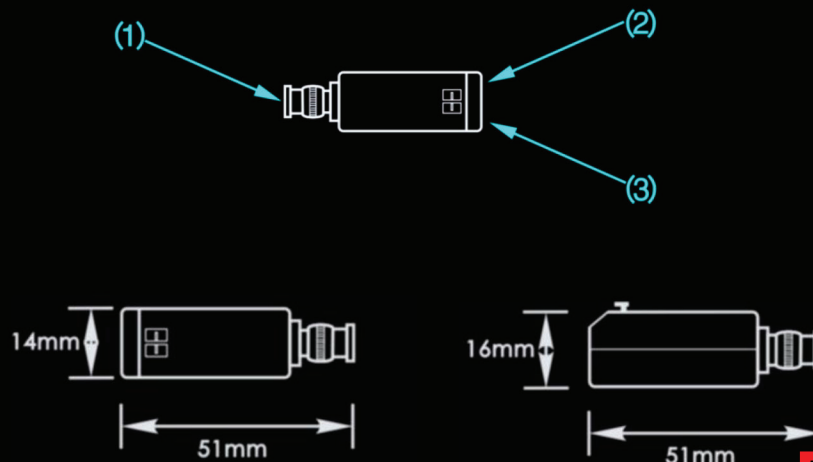

**EV TURBOHD**  
series