

MIXING VALVES



"Apollo" Valves
Made In The USA



MIXING VALVES

HYDRONIC TEMPERING VALVES


34-200 SERIES




The Apollo® Model TV (34-200 Series) thermostatic mixing valve provides non-ASSE extension of water heater capacity and hot water temperature control in hydronic heating systems. Available in low or high temperature options for floor or baseboard applications.

FEATURES

- Low temperature range 85°-120°F (-L1 suffix)
- High temperature range 120°-180°F (-01 suffix)
- Stainless steel spring
- Corrosion resistant bronze body
- Thermoplastic shuttle assembly
- Solder connections are standard
- In-line repairable
- Fingertip temperature control
- **Made in USA - ARRA compliant**

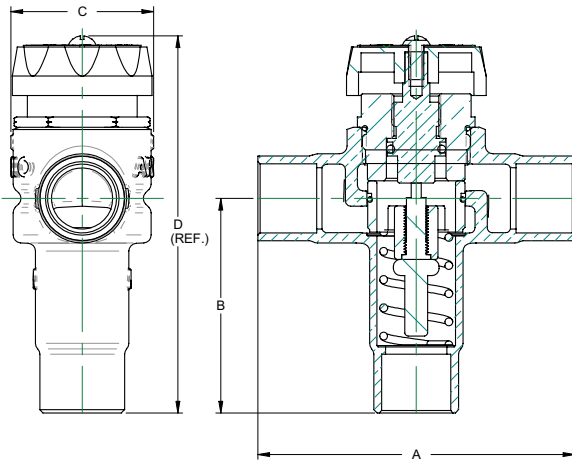

Part No. Low Temp 85° - 120° F	Part No. High Temp 120° - 180° F	Connection	Size (in.)	Dimensions		Weight Lbs.
				Height	Width	
34203L1	3420301	Solder	1/2	4.45	3.75	1.4
34204L1	3420401	Solder	3/4	4.47	4.00	1.5

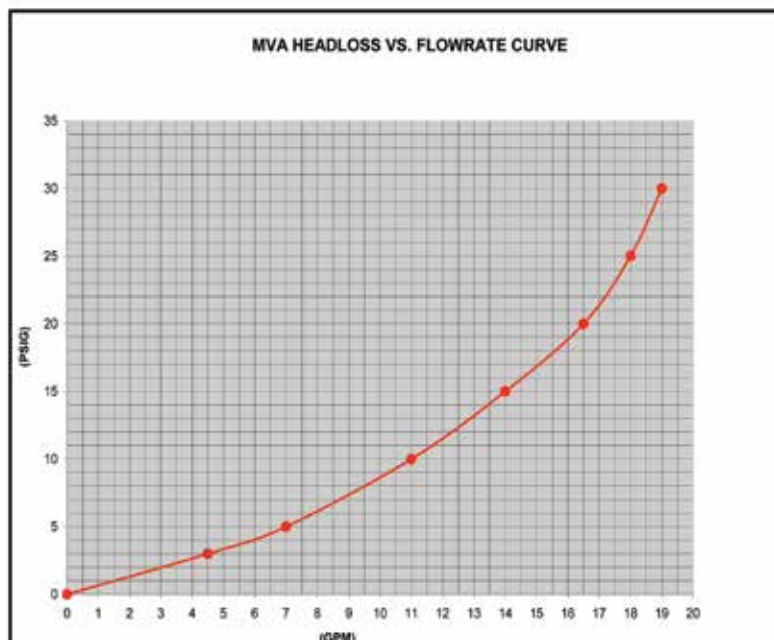

ASSE 1017 Point of Source Mixing Valves

MVA (34A) Series/MVAH Hydronic Series



The Apollo MVA thermostatic master mixing valves are designed for ASSE 1017 "point of source" applications. They provide reliable hot water temperature control of potable and hydronic hot water distribution systems.

FEATURES

- Superior thermostatic element technology for optimal performance, reliability and accuracy
- Integral inlet strainers and check valves are standard to protect against cross-flow and foreign particles in the piping system
- Thermostat over-temperature control
- Maximum temperature limit option
- Fingertip temperature control
- Cold or hot water supply failure shut-off protection
- Multiple connection options to fit your specific needs
- High temperature version for hydronic/radiant heating applications
- Standard materials of construction meet the requirements of the EPA Safe Drinking Water Act
- Lead free option available - specify model 34ALF
- **Made in USA - ARRA compliant**

APPROVALS


- ASSE 1017 - Temperature Actuated Mixing Valve for Hot Water Distribution Systems
- CSA B125.3 - Plumbing Supply Fittings

PERFORMANCE RATING

- | | |
|----------------------------------------------------|-------------------------|
| • Maximum working pressure | 150 psig (1034 kPa) |
| • Maximum working temperature | 210°F (99°C) |
| • Cold water inlet temperature range | 39-80°F (4 - 27°C) |
| • Hot water inlet temperature range | 120 - 200°F (49 - 82°C) |
| • Minimum flow rate | 1/2 gpm (1.9 lpm) |
| • Mixed water temperature range | 130 - 180°F (54 - 82°C) |
| • Mixed water temperature tolerance | ±5°F (1.7°C) |
| • Cv rating | 3.9 |
| • Flow rate at 30 psid(138kPa) | 19 gpm (64 lpm) |
| • Maximum pressure differential between hot & cold | 25% |

MATERIAL

- Body: ASTM B584 Bronze
 Shuttle: Noryl® Modified PPO (Polyphenylene Oxide)
 Sensor: Copper/Wax filled
 O-ring: Chloramine Resistant EPDM
 Spring: ASTM A313 Stainless Steel
 Cap: ABS (Acrylonitrile Butadiene Styrene)

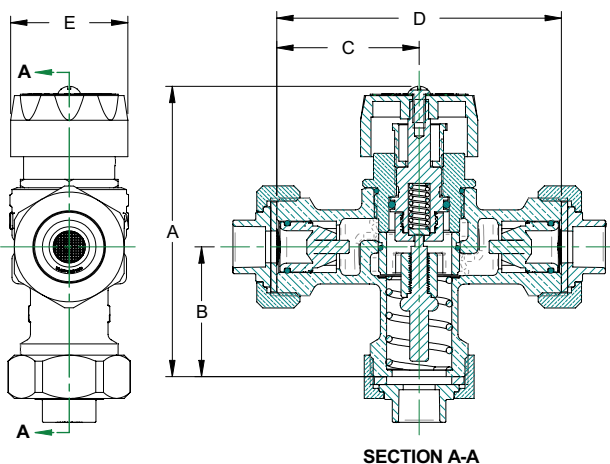

OPTIONS

Max Temperature Adjustment Setting (B suffix)

Preset to 120°F maximum temperature

High Temp Range (H) Radiant Heat Application

120°F-180°F (Not ASSE Certified)

See 34A-H submittal sheet

Lead Free construction certified 0.25% lead max.

Model 34ALF


MIXING VALVES

Commercial High Capacity Mixing Valves


MVC (34C Series)





3/4" - 1"



34C-104/34C-105



1-1/4" - 2"

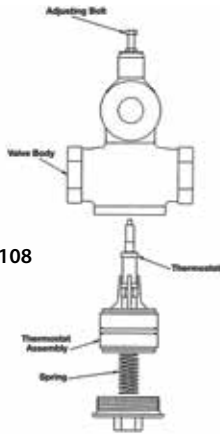

34C-106/34C-108


The Apollo® Model MVC (34C Series) ASSE 1017 listed, high-capacity mixing valves are thermostatically controlled regulating valves designed for use in large commercial and institutional "point of source" and hydronic hot water systems or applications. Simple adjustment of water temperature from 90°-140°F or 130°-180°F. **Lead Free** valves are available.

FEATURES

- Sizes 3/4", 1", 1-1/4", 1-1/2", 2" FNPT
- Standard temp range 90°-140°F (-01 suffix)
- High temp range 130°-180°F (use suffix "H1") for hydronic/radiant heating systems
- Highest flow rates in its class, up to 165 gpm
- Threaded connections
- All-bronze and stainless steel construction
- Patented design for easy in-line maintenance
- Supply pressures to 150 psig
- U.S. Patent #6,328,219
- ASSE 1017 listed
- CSA B125.3 "Plumbing Fittings"
- Lead free option available - specify model 34CLF
- **Made in USA - ARRA compliant**

SPECIAL FEATURES

Selected Apollo 34C mixing valves feature a two-piece shuttle with integral over-travel spring so they're smaller and easier to install than other high-capacity valves. Plus their patented snap-fit element retainer and shuttle with special finger-grip pads assure easy removal and servicing without the need for special tools.

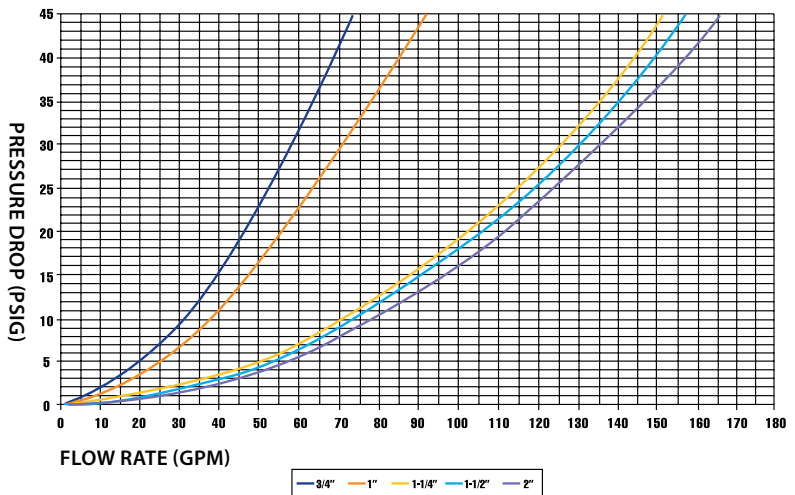

ORDERING NUMBERS

Size (in.)	Part No. Standard Temp. 90° - 140° F	Part No. High Temp. 130° - 180° F
3/4	34C-104-01	34C-104-H1
1	34C-105-01	34C-105-H1
1-1/4	34C-106-01	34C-106-H1
1-1/2	34C-107-01	34C-107-H1
2	34C-108-01	34C-108-H1

ASSE 1070/1017 Point of Use Mixing Valves

MVB (34B Series)



The Apollo® Model “MVB” (34B Series) thermostatic mixing valves are designed to control and limit the volumes of cold and hot water required to deliver mixed water at a predetermined temperature either from the “point of source” or “point of use” application for single or multiple fixtures. **Lead Free** valves are available with various end connections.

FEATURES

- Highest capacity that meets ASSE 1070
- Superior thermostatic element technology for optimum reliability, dependability and accuracy
- Integral strainers and check valves provide protection against cross-flow and foreign particles
- Thermostat over-temperature protection
- Tamper resistant locking cap feature
- Maximum temperature setting adjustment
- Meets the requirements of the EPA Safe Drinking Water Act
- Instantaneous cold or hot water supply failure shut-off protection
- Multiple connection options to fit your specific needs
- Lead free option available - specify model 34BLF
- **Made in USA - ARRA compliant**

APPROVALS

- ASSE 1017 - Temperature Actuated Mixing Valve for Hot Water Distribution Systems
- ASSE 1070 - Water Temperature Limiting Device
- CSA B125.3 - Plumbing Supply Fittings

PERFORMANCE RATING

Maximum supply pressure	150 psig (1034 kPA)
Maximum working temperature	210°F (99°C)
Hot water inlet temperature range	120 - 180°F (49 - 82°C)
Mixed water temperature range	80 - 120°F (27 - 49°C)
Mixed water temperature tolerance	± 3°F (1.7°C)
Minimum flow rate	1.5 gpm (5.7 lpm)
Maximum pressure differential between hot & cold	25%
Minimum inlet/outlet temperature differential	15°F

MIXING VALVES

ASSE 1070 Point of Use "Mini Mixer" Valves

MVD (34D Series)



The Apollo® MVD (34D Series) Mini Thermostatic mixing valves are designed for ASSE 1070 "Point of Use" temperature control applications with a single fixture using proven ASTM grade materials. These valves will hold a desired temperature within $\pm 3^\circ\text{F}$ and will shut off flow in the event of hot or cold water failure. They come equipped with a tamper-resistant high temperature limit stop to prevent adjustment above 120°F .

FEATURES


- Tamper resistant locking control knob
- Adjustable maximum temperature limit stop
- Crush proof integral check valves
- Hot/cold water failure protection
- Single outlet model for sensor faucets
- Bypass fitting option for dual fixture faucets
- Satin chrome plating option
- 3/8" compression or hose connections
- Mounting bracket included
- Lead free option available - specify model 34DLF
- **Made in the USA - ARRA compliant**

PERFORMANCE RATING


Outlet temperature range	(85°F - 120°F)
Maximum pressure:	125 psig
Maximum inlet temperature:	210°F
Minimum supply pressure	30 psi (207 kpa)
Minimum inlet/outlet temperature differential	15°F
Maximum hot/cold pressure differential	25%

APPROVALS

- ASSE 1070 - "Performance Requirements for Water Temperature Limiting Devices"
- CSA B125.3 - "Plumbing Fittings"

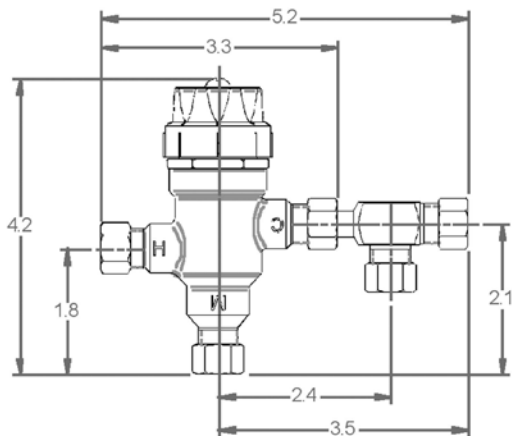

Model Number	Lead Free Model #	Order Number	Lead Free Order #	Description	Weight
MVD	MVD-LF	34D30201	34DLF30201	3/8" Single Outlet Bronze	.82
MVDR	MVDR-LF	34D30217	34DLF30217	3/8" Single Outlet Chrome	.82
MVDB	MVDB-LF	34D302B1	34DLF302B1	3/8" Double Outlet Bronze	1.0
MVDBR	MVDBR-LF	34D302B17	34DLF302B17	3/8" Double Outlet Chrome	1.0

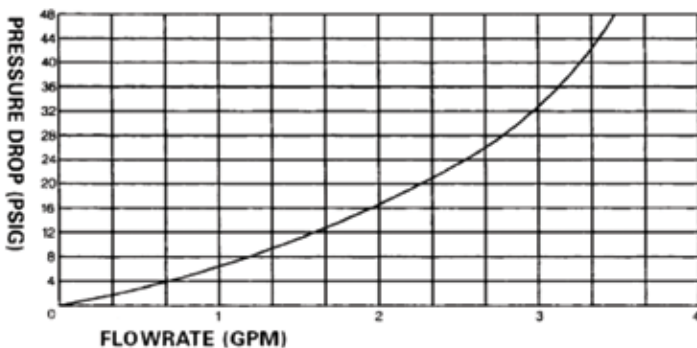

Hi/Lo Mixing Valve – ASSE 1069/1017

34HL Series



The 34HL Mixing Valve uses proven Apollo thermostatic control to produce a consistent mix of water from low through high flow range.

This single assembly controls mixed water temperatures to multiple-outlet shower and sink installations. It's the ideal choice in new construction or retrofits in nursing homes, prisons, hospitals, schools, gymnasiums, airports and other facilities where constant safe water temperature needs to be maintained at several outlets without the use of independent ASSE 1016 shower valves.

FEATURES

- The Apollo 34HL is an advanced Thermostatic Mixing Valve capable of maintaining safe, consistent temperature control of water at low and high flows to within $\pm 3.6^\circ\text{F}$.
- The 34HL will provide consistent temperature control at flow rates as high as 60 GPM and as low as 1.5 GPM, including mid-range flow between high and low.
- This high quality Apollo valve performs its function without requiring recirculation pumps like other systems in order to achieve low flow control.
- Integral strainers and checks are provided at the hot and cold supply inlets for greater reliability and performance.
- These cast bronze thermostatic mixing valves are manufactured to the same exacting standards that have made the Apollo name famous for durability and reliability.
- **Made in USA - ARRA compliant**

OPERATION

- The 34HL design is patented with a variable fluid flow assembly and dual thermal actuated controls for either low or high flow conditions.
- The passages are calibrated to control water temperature during all flow conditions without a "dead zone" between low and high flow.
- The 34HL also provides fluid shutoff as required by ASSE 1069 in the case that either the hot or cold supply lines fail (or are shut off for any reason) to prevent scalding.
- The valve can be tamper-resistant to limit the water temperature from exceeding safe conditions as required by ASSE 1069.
- The valve also meets the requirements of ASSE 1017 for Point of Source Applications.

Product Specifications	
Maximum Static Pressure	150 psig (1034 kpa)
Maximum Water Temperature	200° F (93° C)
Minimum Flow ASSE 1069 & 1017	1.5 gpm (5.7 lpm)
Temperature Adjustment Range	90° F - 140° F
Maximum Inlet Pressure Differential	30 psi (207kpa)
Inlet Connection	1" NPT
Outlet Connection	1-1/4" NPT
Temperature Gauge (1)	0-200°F
Pressure Gauge (3)	0-160 psi
Shipping Weight	36 lbs

This device will service end use fixture fittings, including but not limited to, gang showers and sitz baths, by supplying tempered water at a preset temperature through a single supply pipe and will meet ASSE standard 1069-2005. ASSE 1069 devices are designed to reduce the risk of scalding and thermal shock during changes in hot or cold water supply pressure or temperature, or loss of cold water supply.

Emergency Eye Wash/Face Wash Mixing Valve

MVE (34 E Series)




The Apollo® Model "MVE" (34E Series) emergency mixing valves are designed to control the cold and hot water temperature to deliver tepid water at a predetermined temperature to emergency eyewash/facewash fixtures. The device provides a precise temperature and flow control in the event of cold water, hot water and thermostatic element failures.

FEATURES

- Hot and cold water supply failure protection patented design (US Patent 6,926,20 B2)
- Tepid water temperature limit control and adjustment
- Tepid water temperature adjustment handle with locking mechanism for tamper-resistant protection and inadvertent adjustment
- Integral inlet check valves and strainers to provide protection against cross-flow and foreign particles
- Superior thermostatic element technology for optimum reliability, dependability and accuracy
- Thermostatic element failure and over-travel protection
- High efficiency and positive shut-off check valves
- In-line accessibility and serviceability of failure protection module and mixing valve internal components
- Meets the requirements of the EPA Safe Drinking Water Act
- Corrosion resistant components
- Single cartridge design of failure protection module for easy service and maintenance.
- Integral hot water by-pass
- Positive shutoff of hot supply when cold supply is lost
- Lead free option available - specify model 34ELF
- **Made in USA - ARRA compliant**

APPROVALS


- ASSE 1071 - Temperature Actuated Mixing Valves for Plumbed Emergency Equipment
- ANSI/ISEA Z358.1 2009 Emergency Eyewash & Shower Equipment

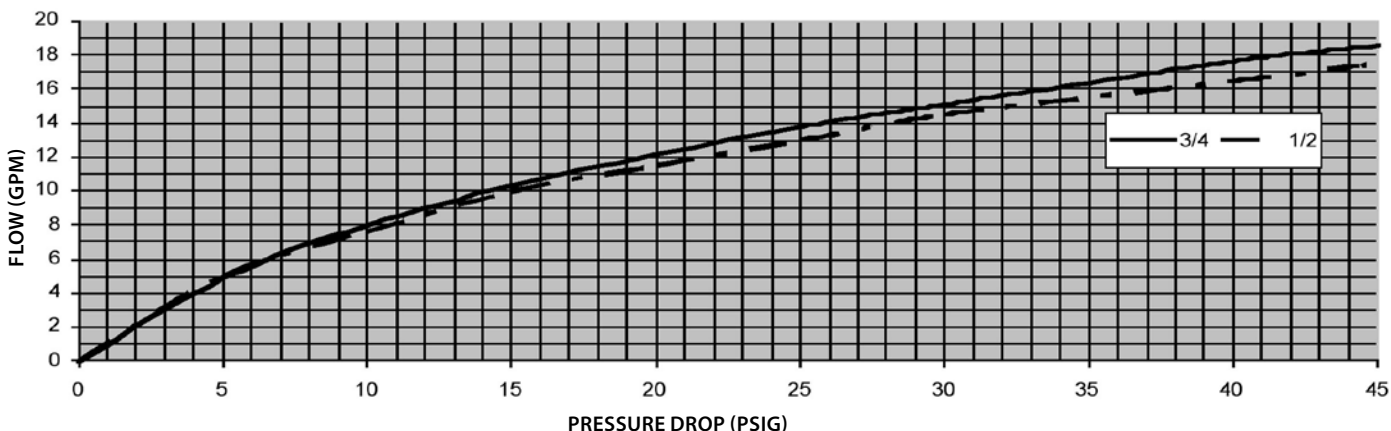

MIXING VALVES

Emergency Eye Wash/Face Wash Mixing Valve

MVE (34E Series)


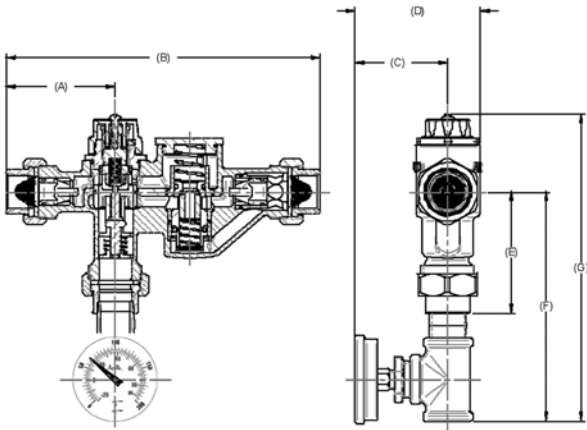


PERFORMANCE RATING

Maximum working pressure	150 psig (1034 kPa)
Hot water inlet temperature range	120 - 180°F (49 - 82°C)
Cold water inlet temperature range	40 - 70°F (4.4 - 21°C)
Tepid water temperature adjustment range	65 - 95°F (18.3 - 35°C)
Mixed water temperature tolerance	± 5°F (2.8°C)
Flow rate @ 30 psig (206.9 kPa) differential	15 gpm (56.8 lpm)
Cold water bypass @ 30 psi (207 kPa) differential	13.5 gpm (51 lpm)

(Note: The cold water supply shall be at least 20°F (-6.7°C) lower than the outlet water temperature setting)

CONNECTION SIZE		1/2" THREADED	1/2" SOLDER	3/4" THREADED	3/4" SOLDER
BASIC VALVE	MODEL #	MVE12	MVES12	MVE34	MVES34
	ORDERING #	34E103T	34E103S	34E104T	34E104S
INCLUDES OUTLET TEMPERATURE GAUGE	MODEL #	MVE12G	MVES12G	MVE34G	MVES34G
	ORDERING #	34E113T	34E113S	34E114T	34E114S
INCLUDES OUTLET TEMP. GAUGE AND INLET BALL VALVES	MODEL #	MVE12GB	MVES12GB	MVE34GB	MVES34GB
	ORDERING #	34E123T	34E123S	34E124T	34E124S
LEAD FREE BASIC VALVE	MODEL #	MVE12LF	MVES12LF	MVE34LF	MVES34LF
	ORDERING #	34ELF103T	34ELF103S	34ELF104T	34ELF104S
DIMENSIONS & WEIGHTS					
	A (in.)	3.09	3.22	3.09	3.10
	B (in.)	8.90	9.15	8.90	8.90
	C (in.)	2.66	2.66	2.67	2.67
	D (in.)	3.60	3.60	3.60	3.60
	E (in.)	3.45	3.45	3.45	3.45
	F (in.)	5.77	5.77	6.32	6.32
	G (in.)	7.83	7.83	8.39	8.39
	UNIT WT. (lbs.)	3.94	3.73	5.13	5.07

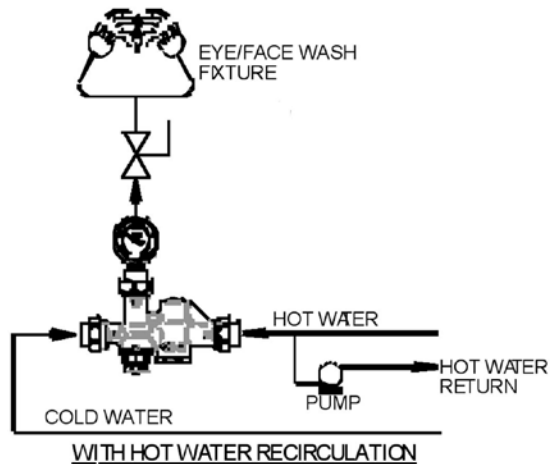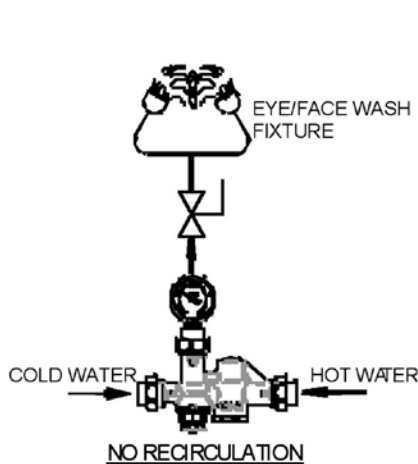

34E TYPICAL INSTALLATIONS

Note: Piping and installation of the device must be in accordance to federal, state, and local plumbing codes.

Note: If the valve is some distance from the hot water source, recirculation is required to keep the hot water supply temperature within the required operational limits

MIXING VALVES

APOLLO® MIXING VALVES APPLICATION CHART - Point of Source

34-200 Series



Apollo 34 Series mixing valves help extend hot water supply and enhance the life and accuracy of hydronic thermostats in residential and small commercial systems. These valves may be used to increase draw capacity of automatic storage water heaters. They save hot water and energy by automatically regulating the mix of hot water with cold. Water temperatures can be adjusted by simply turning the yellow knob to the desired setting.

- Sizes 1/2", 3/4" solder
- Corrosion resistant bronze body and stainless steel spring
- Easy installation
- For tankless coils, water heaters, boilers and solar energy systems
- Outlet temperatures from 120°F to 130°F (110°F to 150°F optional)

34A-H Series – Radiant Heat



Apollo 34H Series mixing valves are ideal for use with domestic and commercial boilers and all types of radiant systems. They are available in a variety of pipe end connections and are equipped with element over-travel protection. Also the 34H Series mixing valves offer integral checks to prevent cross-connection of temperatures.

- Sizes 1/2", 3/4", 1"
- Maximum rated working pressure 125 psig
- Mixed temperature range is 120°F to 180°F
- Corrosion resistant cast bronze body
- Union tailpieces and union nuts, standard
- Designed to make maintenance fast and easy
- Glass-filled Noryl® shuttle

34A Series – ASSE 1017



Apollo 34A Series mixing valves provide thermostat control of temperatures in residential, commercial and non-potable hot water systems. They are ASSE 1017 certified and designed for use with water heaters and boilers. During operation, the valve redistributes and extends safe hot water from the heater to various sections of a building's water system. 34A Series mixing valves offer integral checks to prevent cross-connection of temperatures. They also enable the contractor to direct mount the unit to the heater or boiler instead of heat trapping the valve.

- Sizes 1/2", 3/4", 1"
- Highest flow capacity in their class
- Maximum rated working pressure of 125 psig
- Easy temperature control from 85°F to 140°F
- Corrosion resistant cast bronze body
- Union tailpieces and union nuts, standard
- Easily accessible internals allow in-line servicing
- Glass-filled Noryl® shuttle

34C Series – ASSE 1017



Apollo 34C Series high capacity mixing valves are ASSE 1017 certified. Also available in a high temperature model, these large capacity valves are designed for use in large commercial and institutional hot water systems.

- Sizes 3/4" - 2"
- Industry leading flow rates
- Corrosion resistant cast bronze body
- Stainless steel and thermoplastic internals
- Maximum rated pressure 150 psig
- Controlled temperature range is 90°F to 140°F (130°F to 180°F optional)
- All replaceable parts accessible from single point
- In-line repairable
- Glass-filled Noryl® shuttle

34HL Series – ASSE 1017/ASSE 1069

Hi/Lo Mixer



Apollo 34HL single assembly controls mixed water temperatures to multiple-outlet shower and sink installations. It's the ideal choice in new construction or retrofits in nursing homes, prisons, hospitals, schools, gymnasiums, airports and other facilities where constant safe water temperature needs to be maintained at several outlets without the use of independent ASSE 1016 shower valves.

- Capable of maintaining safe, consistent temperature control of water at low and high flows to within $\pm 3.6^\circ\text{F}$
- Provides consistent temperature control at flow rates as high as 60 GPM and as low as 1.5 GPM, including mid-range flow between high and low
- Performs without requiring recirculation pumps like other systems in order to achieve low flow control
- Integral strainers and checks are provided at the hot and cold supply inlets for greater reliability and performance.
- Manufactured to the same exacting standards that have made the Apollo name famous for durability and reliability
- Units can be mounted in parallel for extra large flow requirements

www.apollovalves.com

Customer Service (704) 841-6000



MIXING VALVES

APOLLO® MIXING VALVES APPLICATION CHART - Point of Use

34D Series – ASSE 1070



Apollo 34D Series thermostatic “Mini Mixer” valves are dual ASSE 1070 certified and designed as the ultimate single fixture valve, with a mixed accuracy of +/- 2° F. Two designs are available depending on the application; single outlet design for sensor type faucets and double outlet design for standard connections.

- Compact, space saving design
- 3/8” compression x 3/8” compression connections
- Factory equipped with integral checks
- Corrosion resistant cast bronze body
- Stainless and thermoplastic internals
- Bypass tee option for cold water connection
- Chrome plating option

34B Series – ASSE 1070/ASSE 1017



Apollo 34B Series thermostatic mixing valves are dual ASSE 1070 and 1017 certified for point-of-use applications and provide enough capacity to protect up to twelve separate fixtures while maintaining an accuracy of +/- 3° F. They offer easy adjustment of water temperatures. In accordance with ASSE 1070 standards, Series 34B valves come with maximum set point control features.

- Sizes 1/2”, 3/4”, 1”
- Controlled temperatures from full cold up to 120° F.
- Corrosion resistant bronze body
- Union tailpieces, nuts, standard
- NPT, solder, CPVC and PEX connections
- In-line repairable
- Glass-filled Noryl® shuttle
- Factory equipped with integral checks and strainers
- Locking cap feature

34HL Series – ASSE 1069/ASSE 1017

Hi/Lo Mixer



Apollo 34HL is dual ASSE 1069 and 1017 certified as Point of Source and Point of Use. This thermostatic device will service multiple end-use fixture fittings, including but not limited to, gang showers and sitz baths, by supplying tempered water at a preset temperature through a single supply pipe and will meet ASSE standard 1069-2005. ASSE 1069 devices are designed to reduce the risk of scalding and thermal shock during changes in hot or cold water supply pressure or temperature, or loss of cold water supply.

- Capable of maintaining safe, consistent temperature control of water at low and high flows to within $\pm 3.6^{\circ}\text{F}$
- Provides consistent temperature control at flow rates as high as 60 GPM and as low as 1.5 GPM, including mid-range flow between high and low
- Performs without requiring recirculation pumps like other systems in order to achieve low flow control
- Integral strainers and checks are provided at the hot and cold supply inlets for greater reliability and performance.
- Manufactured to the same exacting standards that have made the Apollo name famous for durability and reliability
- Units can be mounted in parallel for extra large flow requirements
- Cabinets available

34E Series – ASSE 1071

Emergency Eye Wash / Face Wash



Apollo 34E Emergency Mixing Valves are designed to control the cold and hot water temperature to deliver tepid water at a predetermined temperature to emergency eyewash/facewash fixtures. The device provides a precise temperature and flow control in the event of cold water, hot water and thermostatic element failures. Complies with ANSI Z358.1-2009 & ASSE 1071-2008.

- Hot and cold water supply failure protection patented design (US Patent 6,926,20 B2)
- Tepid water temperature limit control and adjustment
- Tepid water temperature adjustment handle with locking mechanism for tamper-resistant protection and inadvertent adjustment
- Integral inlet check valves and strainers to provide protection against cross-flow and foreign particles
- Superior thermostatic element technology for optimum reliability, dependability and accuracy
- Thermostatic element failure and over-travel protection
- High efficiency and positive shut-off check valves
- In-line accessibility and serviceability of failure protection module and mixing valve internal components
- Meets the requirements of the EPA Safe Drinking Water Act
- Corrosion resistant components
- Single cartridge design of failure protection module for easy service and maintenance.