## NON-ELECTRIC CONDENSATE PUMPS

# CARBON STEEL LOW-PROFILE TANK PMPLS

### Pressure Motive Pump



Model	PMPLS
Body	Carbon Steel
Cover	Carbon Steel
Check Valves	Stainless Steel
PMO Max. Operating Pressure	150 PSIG
TMO Max. Operating Temperature	366°F
PMA Max. Allowable Pressure	150 PSIG @ 650°F

Note: Optional 200 PSIG PMA/PMO. Consult Factory.

#### TYPICAL APPLICATIONS


The **PMPLS** pressure motive pump is a lower profile than the standard PMPF model and is sometimes required when draining condensate from process equipment that is positioned close to the ground which limits the filling head of the pump. Pump & body cover are manufactured from carbon steel and receive the ASME "UM" code stamp.

#### **FEATURES**

- Equipped with our <u>Patented "Snap-Assure"</u> Mechanism which extends the useful life of the pump
- Mechanism incorporates heat-treated stainless steel wear items
- All stainless steel internals for ultimate corrosion resistance
- Dual compression springs made from Inconel-X-750 for high-temperature corrosive service
- Operates using steam, air, nitrogen or other pressurized gases as the motive force
- Non-Electric can be used in remote locations or NEMA 4, 7, 9 & hazardous areas

#### SAMPLE SPECIFICATION

The non-electric pressure powered pump shall be capable of operating with a maximum motive pressure of 150 PSIG provided by steam, air or other gas supply. The pump body shall be fabricated carbon steel and certified with the ASME "UM" code stamp. The pump mechanism shall be float operated with a patented "Snap-Assure" feature constructed of all stainless steel materials with all load bearing points hardened for extended service life. The mechanism shall feature two Inconel springs used in compression with motive & vent valves hardened to 40c Rockwell.

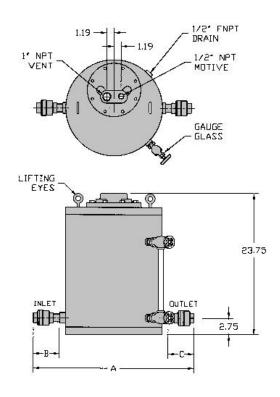

DIMENSIONS - inches/pounds					
Size (Inlet x Outlet)	A	В	С	Weight (lbs)	
1" x 1"	291/2	5 <sup>5</sup> /8	55/8	200	
1 <sup>1</sup> /2" x 1"	303/4	7	5 <sup>5</sup> /8	205	
1 <sup>1</sup> /2" x 1 <sup>1</sup> /2"	32 <sup>1</sup> /8	7	7	210	

MATERIALS		
Body & Cover	Carbon Steel	
Cover Gasket	Grafoil	
Cover Bolts	Steel	
Inlet Valve	Hardened Stainless Steel 40 Rc	
Vent Valve	Hardened Stainless Steel 40 Rc	
Mechanism Yoke	304 Stainless Steel	
Ball Float	304 Stainless Steel	
Check Valves	Stainless Steel	
Springs	Inconel-X-750	
Other Internal Components	Stainless Steel	

Snap-Assure Patent No. 6572340

