


CHECK VALVES

Soft Seated Check Valves


62-500 SERIES (MODEL CVSE) (CONT.)

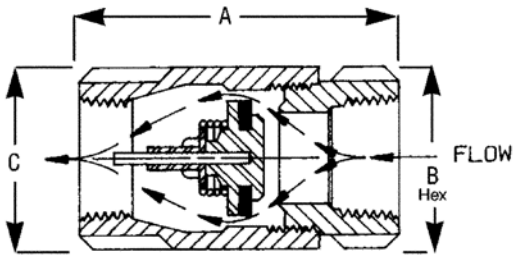

Dimensional Specifications

Item Number	Size	A	B	C	Wt./100
62-501-01	1/4"	2.312	1.125	1.125	38
62-502-01	3/8"	2.312	1.125	1.125	37
62-503-01	1/2"	2.312	1.125	1.125	36
62-504-01	3/4"	2.875	1.375	1.500	75
62-505-01	1"	3.500	1.750	1.937	150

NOTE: Not recommended for use with reciprocating pumps and similar applications. Low flows may result in undesirable noise and premature valve failure. See page 6 for additional precautions.

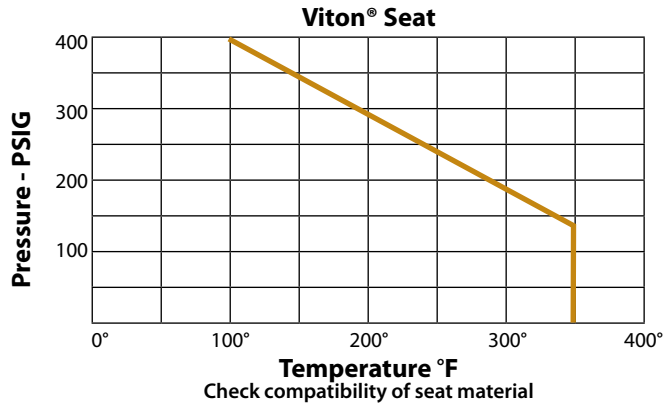

CHECK VALVE PART NUMBERING SYSTEM – SOFT SEAT MODELS

62	- X	X	X	- XX
TYPE	CHECK	SPRING TYPE	SIZE (IN.)	OPTIONS
62 = Stainless Steel	5 = Soft Seat (NPT-F x F) 6 = Soft Seat (Solder) 9 = Soft Seat Repair Kit (Viton only)	0 = .5 psig Cracking Pressure 2 = .2 psig Cracking Pressure	1 = 1/4" 2 = 3/8" 3 = 1/2" 4 = 3/4" 5 = 1"	01 = Standard (Viton seat) P01 = BSPP Thread (ISO 228) T01 = BSPT Thread (EN 10226) 17 = Satin Chrome Plated 57 = Oxygen Cleaned A1 = Less Spring B1 = Nitrile Seat F1 = EPDM Seat E05 = 5 psig Opening Pressure* E10 = 10 psig Opening Pressure*

*Available in 1/4" through 1" Only.

(Note: Not all combinations are available. Contact Customer Service for verification.)