



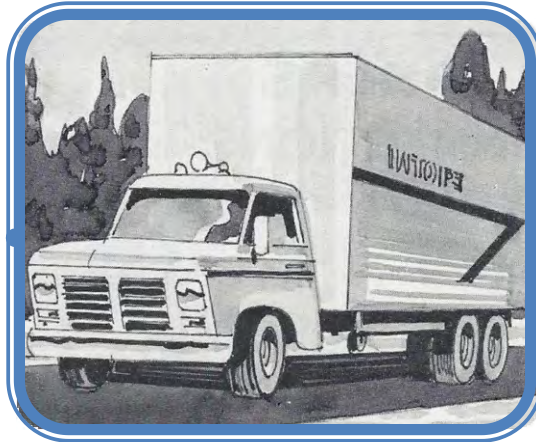


REFRIGERATION, AND OTHER APPLICATIONS

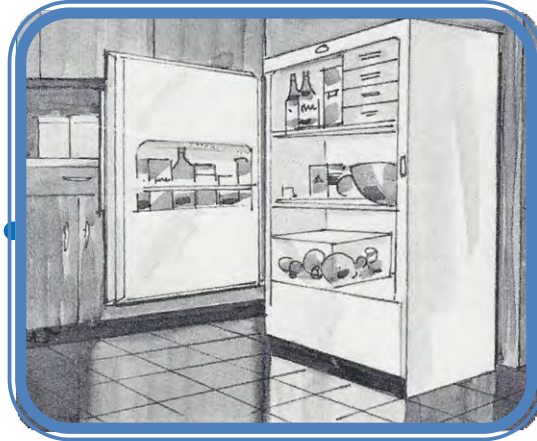

**REFRIGERATION AND TYPE WITH TAPERED PIPE AND
FLARE TUBING CONNECTIONS, Conforms with JIC Standards**

WHEN ORDERING, PLEASE SPECIFY DESIRED POROSITY AS SHOWN UNDER "RECOMANDED POROSITES"

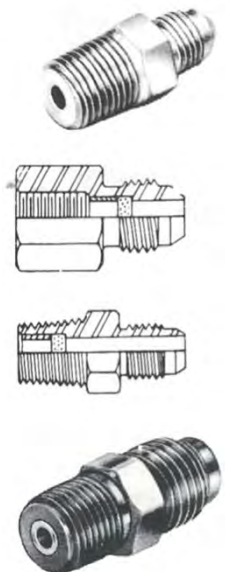

Description of Fitting	HOUSING MATERIAL			
	Cadmium-Plated Steel		Stainless Steel	
	Cat. No.	Weight	Cat. No.	Weight
1/8" NPT Female x 1/4" Flare	12-FR-4	1 oz.	12-FRS-4	1 oz.
1/8" NPT Female x 5/16" Flare	12-FR-5	1 oz.	12-FRS-5	1 oz.
1/4" NPT Female x 1/4" Flare	25-FR-4	1 oz.	25-FRS-4	1 oz.
1/4" NPT Female x 5/16" Flare	25-FR-5	1 oz.	25-FRS-5	1 oz.
1/4" NPT Female x 3/8" Flare	25-FR-6	1 oz.	25-FRS-6	1 oz.
1/2" NPT Male x 1/4" Flare	50-MR-4	3 oz.	50-MRS-4	3 oz.
1/8" NPT Male x 5/16" Flare	12-MR-5	2 oz.	12-MRS-5	2 oz.
1/2" NPT Male x 5/16" Flare	50-MR-5	3 oz.	50-MRS-5	3 oz.
1/4" NPT Male x 5/16" Flare	25-MR-5	2 oz.	25-MRS-5	2 oz.
1/2" NPT Male x 3/8" Flare	50-MR-6	3 oz.	50-MRS-6	3 oz.

*Intermediate porosities are available on special order. Other styles of fittings available; prices on application