


5/2-way Flipper Solenoid Valve for pneumatics

6525

- Modular valve block with 10 mm mounting pitch
- Low power consumption
- Fast response times
- With manual override




A compact manifold with a pitch of 11 mm per station can be put together from the components of Type 6525. Type 6525 consist of a pilot flipper valve, Type 6144 and a pneumatic seat valve. The flipper principle allows switching of high pressures together with low power consumption and fast response times. All valves are equipped with manual override as a standard.

Technical Data

Orifice	DN4.0 mm
Body material	PPS, PA
Seal material	FKM, NBR and PUR
Media	Lubricated, oil free, dry compressed air; neutral gases (5 µm filter recommended)
Media temperature	-10 °C to +50 °C
Ambient temperature	-10 °C to +55 °C
Manual override	Standard
Port connection	Flange for MP11
Pneumatic module	Type MP11 with M5, M7, push-in connection Ø 6 mm
Voltage tolerance	±10%
Cycling rate	approx. 1000 c.p.m.
Voltage	24 V DC *
Nominal power	0.8 W
Duty cycle	Continuous operation (100% ED)
Electrical connection on valve	Rectangular plug with Raster 5.08 mm (not included)
Type of protection	IP40 with rectangular plug
Protection class	3 acc. to VDE 0580
Weight	21 g
Mounting	with 2 screws M2x20
Installation	As required, preferably with actuator upright
Response times [ms]	Measurement acc. to ISO 12238
Opening	< 10 ms
Closing	< 10 ms

* 10% residual ripple allowed

Envelope Dimensions [mm] (see datasheet for details)

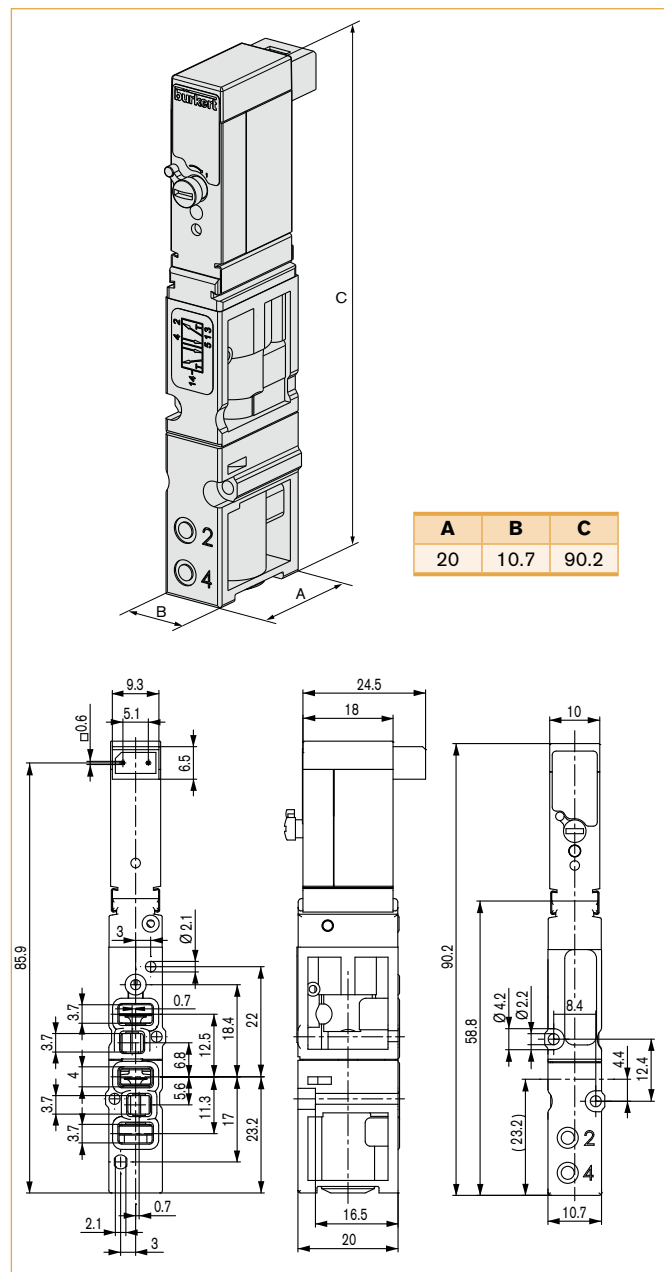

Ordering Chart

Circuit function	Orifice [mm]	Q _{Nn} value air [l/min] ²⁾	Pressure range [bar] ³⁾	Response times		Voltage/Frequency [V/Hz]	Item no.
				Opening [ms]	Closing [ms]		
H 5/2-way valve	4	300	1 - 10 ¹⁾	<10	<10	024V/DC	186 271
			2.5 - 10	<10	<10	024V/DC	179 938

* 10% residual ripple allowed

¹⁾ Version with auxiliary pilot air

²⁾ Measured at +20°C, 6 bar pressure at valve inlet and 1 bar pressure difference

³⁾ Measured as overpressure to the atmospheric pressure

Accessories

Description	Version	Features	Item no.
Rectangular cable plug	Raster 5.08 mm	with 3 m cable	133 486
		with 300 mm flying leads	644 068
		with 2 single contacts	644 067
Protective cover for 5/2-way valve position	complete	for 1 unused valve position	650 373
Pneumatic connector module	left	Push-in connection Ø 10 mm	144 752
		G 1/4"	144 750
		NPT 1/4"	144 751
	right	Push-in connection Ø 10 mm	144 755
		G 1/4"	144 753
		NPT 1/4"	144 754
Pneumatic basic module MP11, 2 valve wide	Push-in connection Ø 6 mm	without check valve	144 903
		with check valve in R	144 909
		with check valve in R and S	144 906
	Connection M5	without check valve	144 904
	Connection M7	without check valve	144 905
Pneumatic basic module MP11, 8 valve wide	Push-in connection Ø 6 mm	without check valve	144 912
		with check valve in R and S	144 915
	Connection M5	without check valve	144 913
	Connection M7	without check valve	144 914