
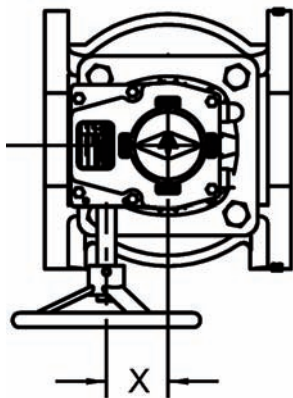
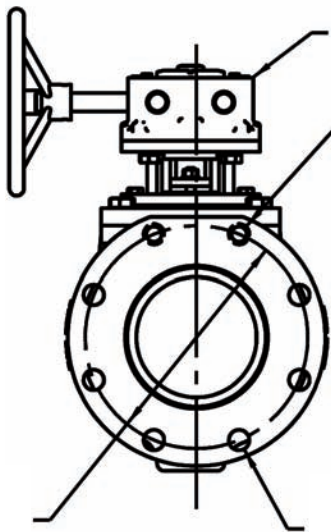



Crispin

K-FLO VALVES

SERIES 800 PLUG VALVES



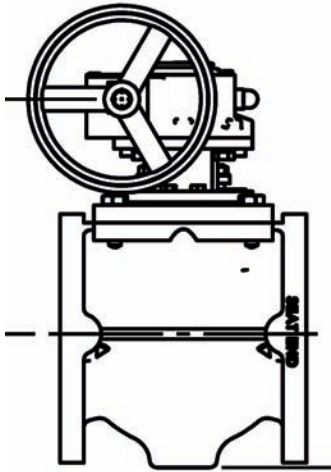


PO Box 411
Berwick PA 18603

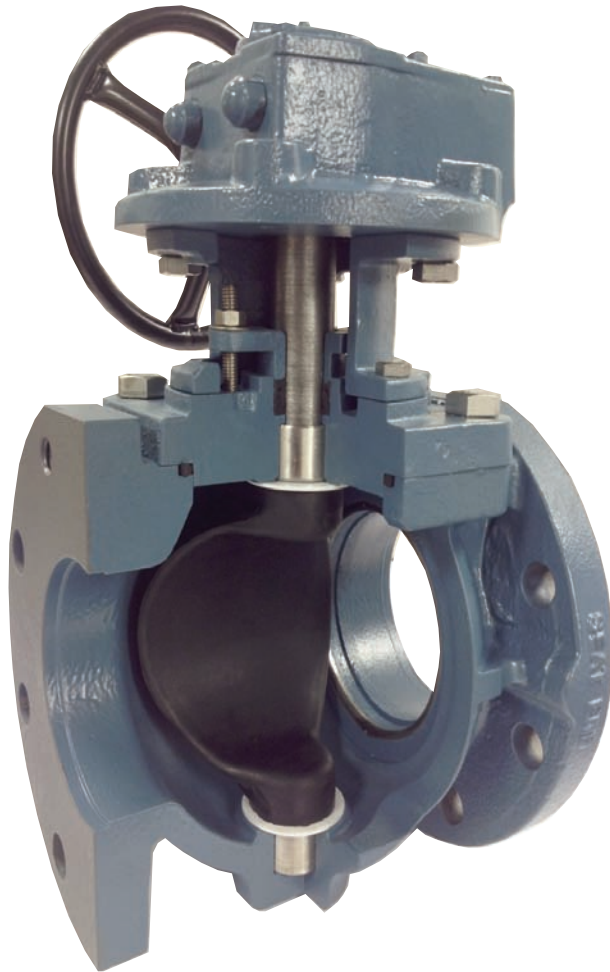

VALVES FROM 2.5" THRU 12"


Crispin

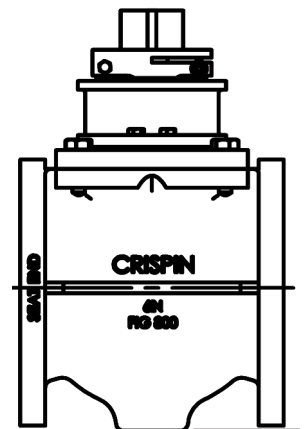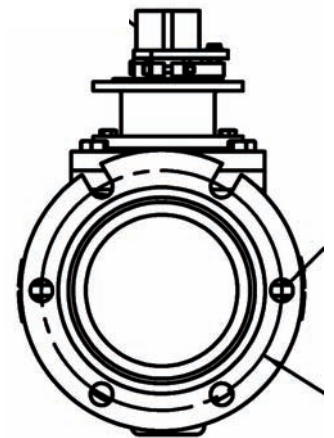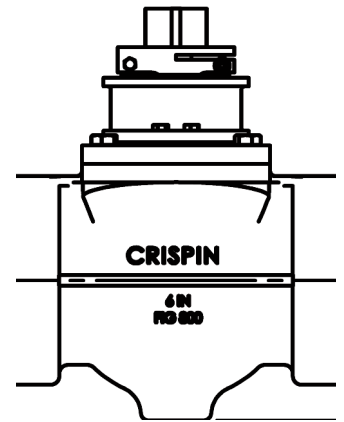

800-247-VALV
www.crispinvalve.com

800 SERIES Plug Valve Sizes 2.5"-12"

Crispin/K-Flo Series 800 is a rugged and long-lasting Eccentric Plug valve compliant to AWWA C517. Commonly used in Wastewater and arduous installations such as mining--where the pumped media can contain fouling or abrasive solids--the Eccentric Plug Valve is a simple yet critical choice for the maintenance minded end-user. Crispin/K-Flo has taken this simple design and incorporated some of the most frequent user requested upgrades at no additional cost. These include Round Ported Seats through 12", Top and Bottom Grit Seals, Adjustable Packing, and Stainless Steel Fasteners standard. Available in both Flanged and Mechanical Joint End configurations, the Series 800 from Crispin/K-Flo is ready to take on your most difficult application needs.

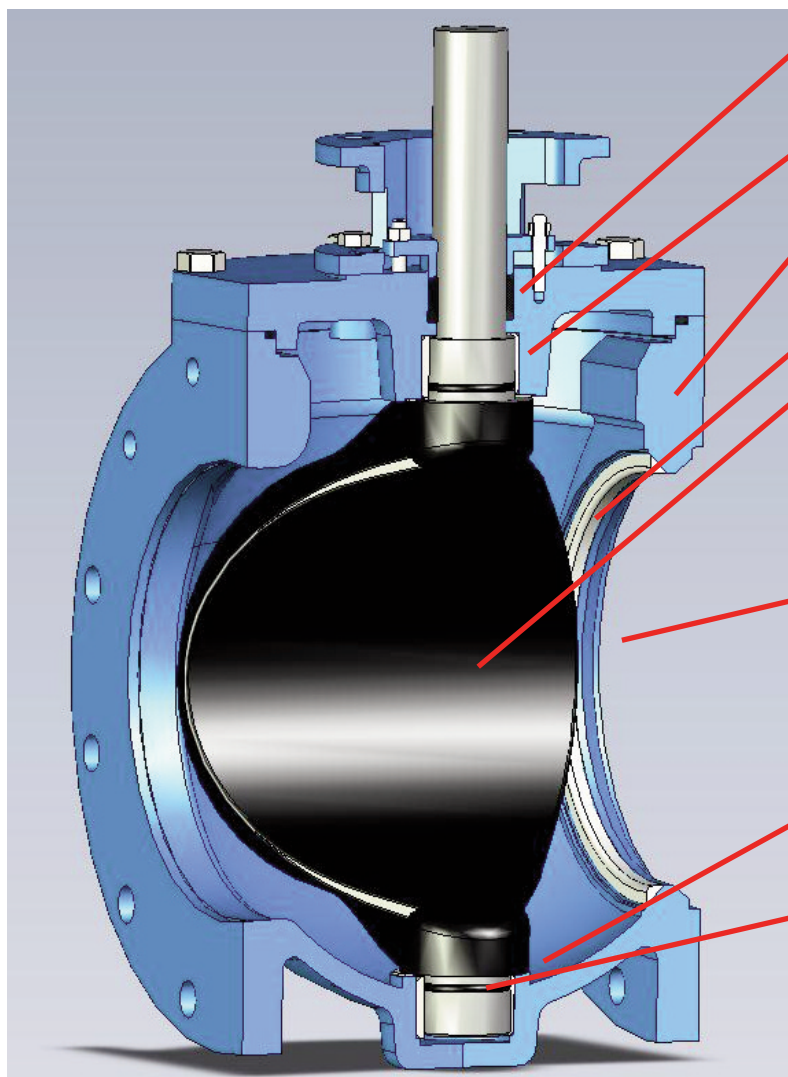

Adjustable Packing--Allows for maintenance and replacement of the packing without the removal of the actuator from the valve.

Bearings--Stainless Steel T316, Sintered for increased lubricity and hardness

Body--ASTM A126 Class B Cast Iron Standard. ANSI B16.1 Class 125 Flanged or AWWA C111 Mechanical Joint ends are available. Ductile Iron Option available.

Seat--Welded 99% nickel seat.

Plug--ASTM A-536-Grade 65-45-12 Ductile Iron Standard. Fully molded with Buna-N rubber, leaving no plug surface, either front or back, that is exposed to the media. The Shaft and Plug are also one integral casting, adding strength by removing any potential shear points as in other valve designs.

Round Port--The port design (round on 2 1/2"-12") is a proven design standard that provides the lowest full open Head Loss values in the industry. Round Ports are far more pigable than traditional reduced rectangular ported valves, and can dramatically reduce turbidity.

Thrust Washers--Upper and Lower reduce wear and provide secondary protection from media along with the primary Top and Bottom Grit Seals.

Grit Seals--Provided Top and Bottom as standard, grit seals provide frontline sealing defense against abrasive media, thus extending both packing and bearing life.

* Class 250 valves are available. Please contact the factory.

MATERIALS

SIZES

2.5"-12" in AWWA Class 150, 250 (meets AWWA C517)

BODY

Cast Iron (ASTM A126, Class B)
Optional Ductile Iron (ATM A536, Grade 65-45-12)

SEAT

99% Welded Nickel

PORT

Round Port, Full Flow Thru 12"

PLUG

Ductile Iron (ASTM A536, Grade 65-45-12)
Fully Molded Buna-N; EPDM Optional

BEARINGS


ASTM A276, Grade 316 Stainless Steel

BOLTS AND NUTS

304 Stainless Steel Standard

800 SERIES MATERIAL LIST

2.5" to 12", 212F Max Temp., 175 psi Max Press, Bi-Directional

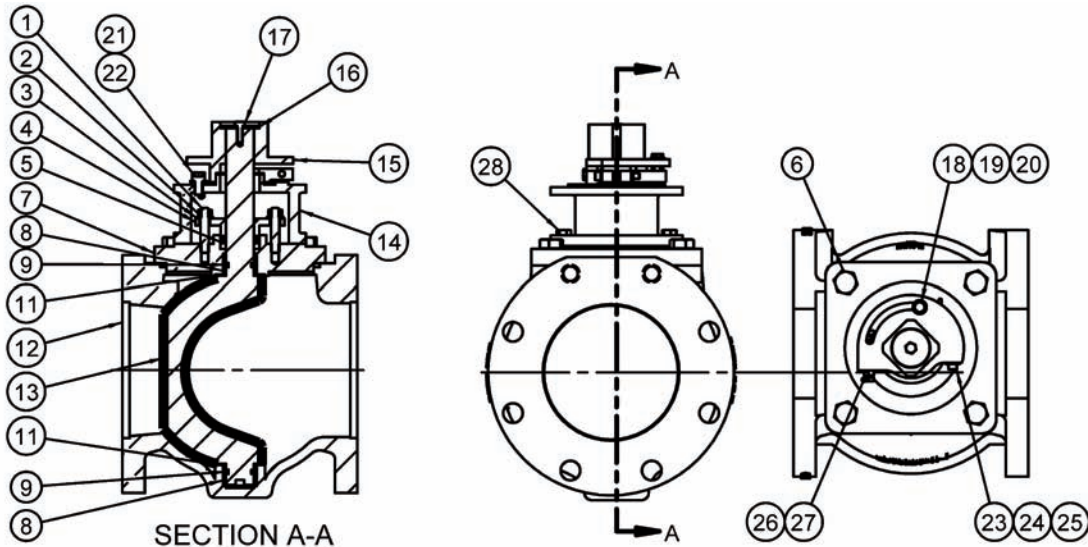


Item	Description	Material	Item	Description	Material
1	Gland Stud	Stainless Steel	15	Torque Collar	A536 GR 65-45-12
2	Hex Nut	Stainless Steel	16	Flat Washer	Q235-A Zinc Plated
3	Flat Washer	Stainless Steel	17	Socket Head Capscrew	Stainless Steel
4	Gland	ASTM A126 CL B	18	Hex Head Capscrew	Stainless Steel
5	V-Ring Set	NBR	19	Hex Nut	Stainless Steel
6	Hex Head Capscrew	Stainless Steel	20	Flat Washer	Stainless Steel
7	Cover	ASTM A126 CL B	21	Socket Head Capscrew	Stainless Steel
8	Bearing	SST, Sintered	22	Lock Washer	Stainless Steel
9	O-Ring	NBR	23	Socket Head Capscrew	Stainless Steel
10	O-Ring	NBR	24	Hex Nut	Stainless Steel
11	Thrust Washer	PTFE	25	Flat Washer	Stainless Steel
12	Body	ASTM A126 CL B	26	Hex Head Capscrew	Stainless Steel
13	Plug Molded	A536 GR 65-45-12 +NBR	27	Hex Nut	Stainless Steel
14	Torque Collar Adapter (Buried)	ASTM A126 CL B	28	Hex Head Capscrew	Stainless Steel

800 SERIES Cv Data (GPM@1PSI)

Size	2.5	3	4	5	6	8	10	12
Cv	425	680	1190	2000	2400	4600	5800	9100


800 SERIES Dimensional Data

K-FLO Model 806 (MJ x MJ w/ 2" Operating Nut)

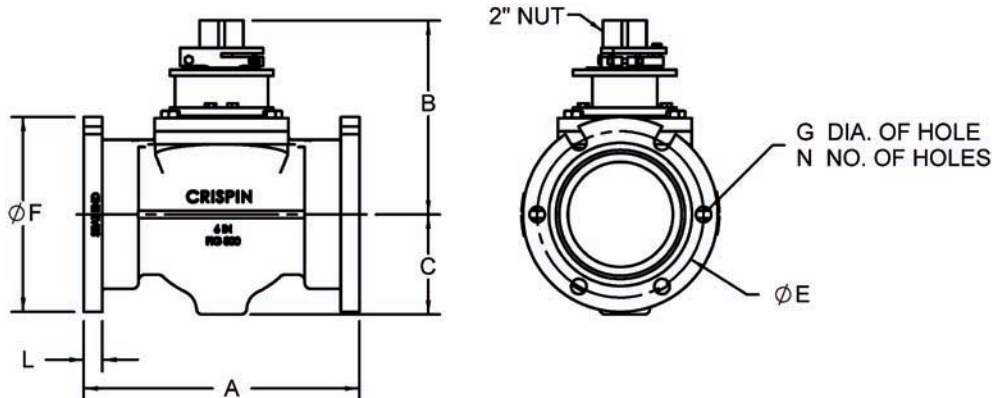

VALVE SIZE	A	B	C	E	F	G	N	L
3	11.50	8.58	3.50	6.19	7.69	0.75	4	0.94
4	14.25	9.54	4.89	7.50	9.00	0.88	4	1.00
6	15.75	11.08	5.71	9.50	11.13	0.88	6	1.06
8	17.37	13.72	7.64	11.75	13.38	0.88	6	1.13

K-FLO Model 806 (Mech. Joint x Mech. Joint w/ Buried Service Gear)

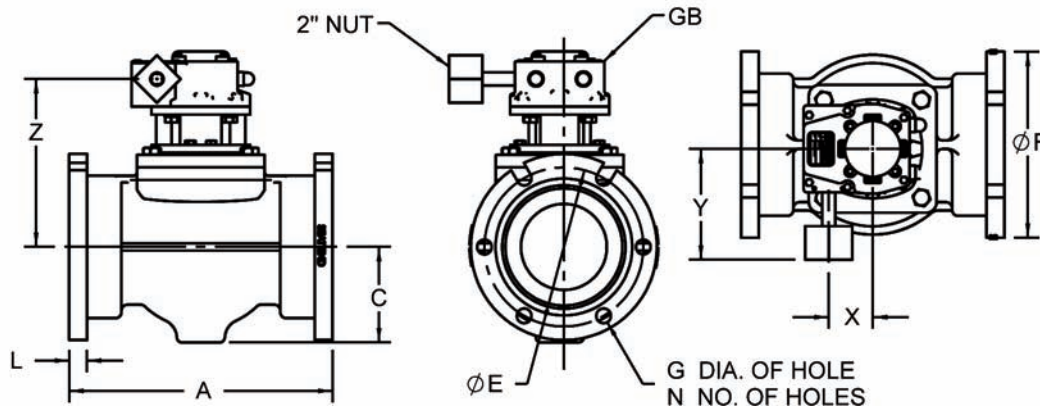


Please contact the factory for additional information.

VALVE SIZE	A	C	E	F	G	N	L	GB	X	Y	Z
3	11.50	3.50	6.19	7.63	0.75	4	0.94	M12	2.63	6.61	7.55
4	14.25	4.89	7.50	9.00	0.88	4	1.00	M12	2.63	6.61	8.56
6	15.75	5.71	9.50	11.13	0.88	6	1.06	M12	2.63	6.61	10.03
8	17.38	7.64	11.75	13.38	0.88	6	1.13	M12	2.63	6.61	12.25
10	19.37	8.90	14.00	15.63	0.88	8	1.38	M12FB	2.63	9.45	14.37
12	20.75	10.00	16.25	17.94	0.88	8	1.50	M14	3.53	7.28	16.19

800 SERIES Dimensional Data


K-FLO Model 804 (FLGx FLG w/ 2" Operating Nut)

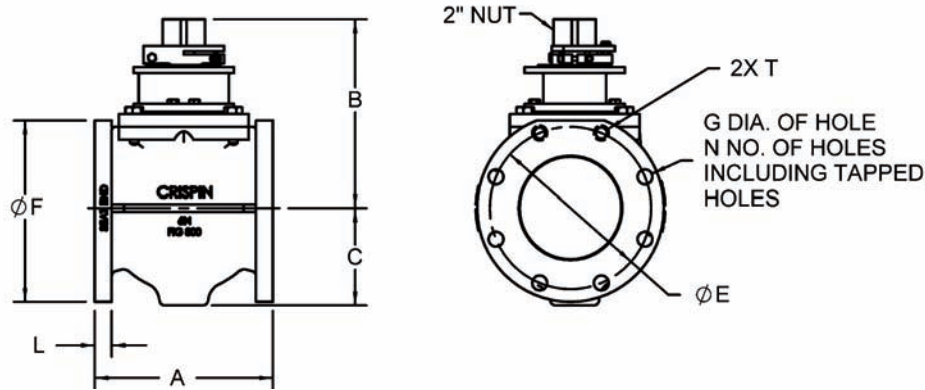

VALVE SIZE	A	B	C	E	F	G	N	L	T
2-1/2	7.50	8.64	3.57	5.50	7.00	0.75	4	0.69	5/8"-11
3	8.00	8.58	3.50	6.00	7.50	0.75	4	0.75	5/8"-11
4	9.00	9.54	4.49	7.50	9.00	0.75	8	1.00	5/8"-11
5	10.00	11.08	5.71	8.50	10.00	0.88	8	0.94	3/4"-10
6	10.50	11.08	5.71	9.50	11.00	0.88	8	1.00	3/4"-10
8	11.50	13.72	7.64	11.75	13.50	0.88	8	1.13	3/4"-10


K-FLO Model 804 (FLG x FLG) w/ Gear & Handwheel

Please contact the factory for additional information.

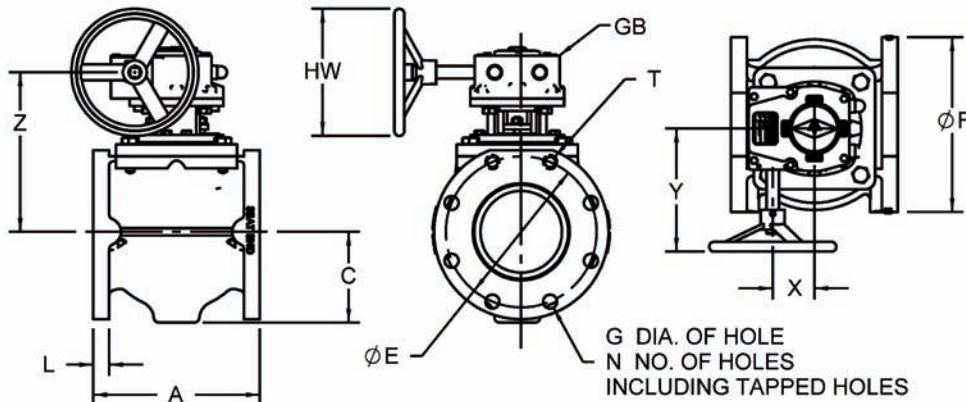

SIZE	A	C	E	F	G	N	L	GB	HW	X	Y	Z
2-1/2	7.50	3.57	5.50	7.00	0.75	4	0.69	M10	8	2.05	6.71	7.33
3	8.00	3.50	6.00	7.50	0.75	4	0.75	M10	8	2.05	6.71	7.27
4	9.00	4.49	7.50	9.00	0.75	8	1.00	M10FB	8	2.05	9.47	8.56
5	10.00	5.71	8.50	10.00	0.88	8	0.94	M12	12	2.63	8.80	10.03
6	10.50	5.71	9.50	11.00	0.88	8	1.00	M12	12	2.63	8.80	10.03
8	11.50	7.64	11.75	13.50	0.88	8	1.13	M12	18	2.63	10.30	12.24
10	13.00	8.90	14.25	16.00	1.00	12	1.19	M12FB	18	2.63	11.63	14.37
12	14.00	10.00	17.00	19.00	1.00	12	1.25	M14	24	3.63	12.21	16.19


800 SERIES Worm Gear Data

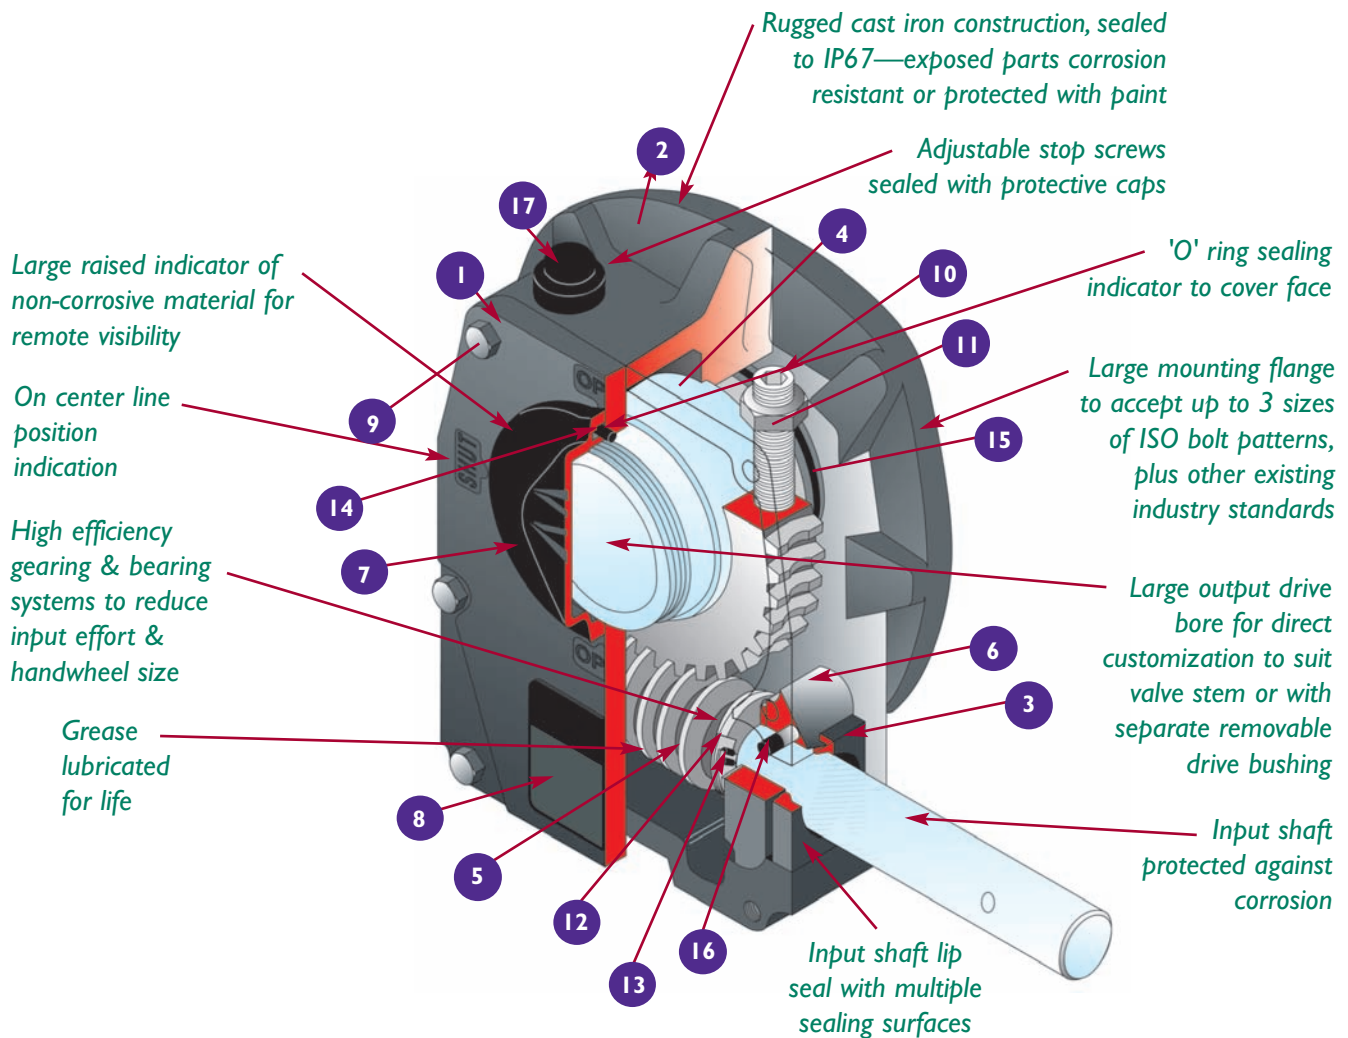


Item	Component	Material Description	Material Specification
1	Cover	Grey cast iron	BS1452 Grade 260
2	Gearcase	Grey cast iron	BS1452 Grade 260
3	Wormshaft Oilseal	Injection Moulded Plastic	Hytrel 5526
4	Quadrant	Ductile Iron	BS2789 Grade 500/7
5	Wormshaft	Nitempered Steel	BS970 606M36
6	Wormshaft Bearings	Sintered Iron Copper	FC02540
7	Indicator Cap	Injection Moulded Plastic	Acetal Kematal VR90
8	Nameplate	Self-adhesive Aluminum	Grey on Bright Background
9	Cover Screws	Hex. Head Set Screws	BS3692 Grade 8.8
10	Stopscrews	Socket Set Screws	BS4168 Part 2
11	Locknut	Hex. Locknut	BS3692
12	Bearing Thrust Washers	Needle Thrust Washer	Type AS
13	Thrust Bearings	Needle Thrust Bearing	Type AXK
14	Indicator O-ring	Medium Nitrile	60-80 Shore Hardness
15	Quadrant O-ring	Medium Nitrile	60-80 Shore Hardness
16	Dowels	Hardened & Ground Steel	BS7055 Type A
17	Locknut Protection Caps	Injection Moulded Plastic	Low Density Polyethylene

ACTUATION OPTIONS & EXTENSIONS


Crispin/K-Flo Series 800 Eccentric Plug valves can be mounted with any configuration of manual, electric, pneumatic, or specialized actuating device that your application may require. Crispin's highly skilled assembly personnel work closely with all major EMO and Gear manufacturers and are trained to mount, adjust, and test all types of actuation. Please contact the factory to discuss all your valve actuation needs.

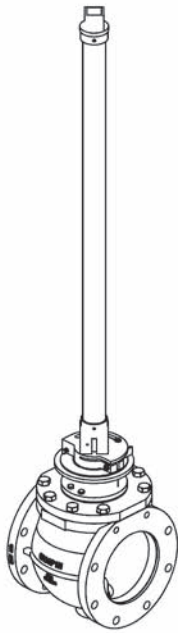


2" Drive Nut w/ Extension Stem

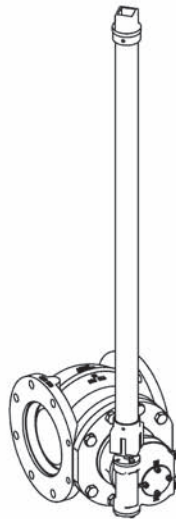


Worm Gear w/ Extension Stem

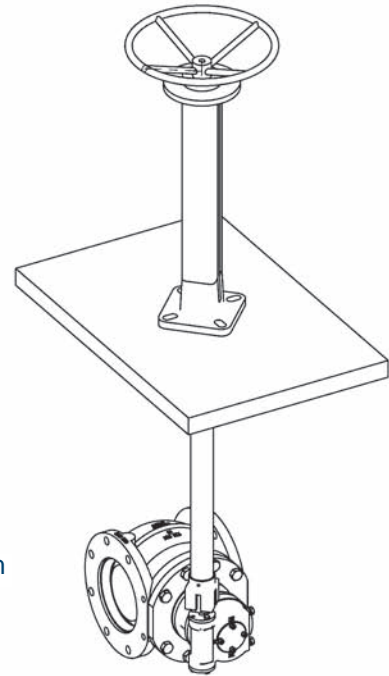


Worm Gear w/ Extension Stem & Indicating Floor Stand

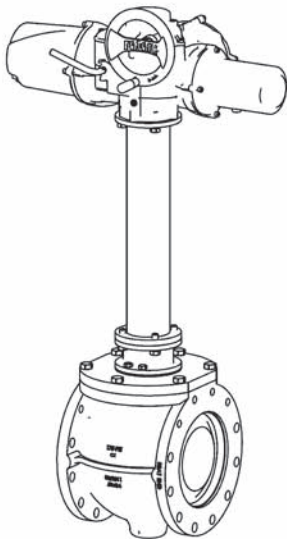

EMO w/ Extended Bonnet

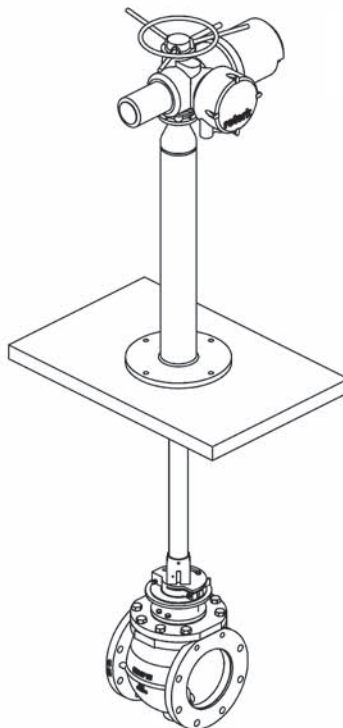

EMO w/ Extension Stem & Non-Indicating Floor Stand

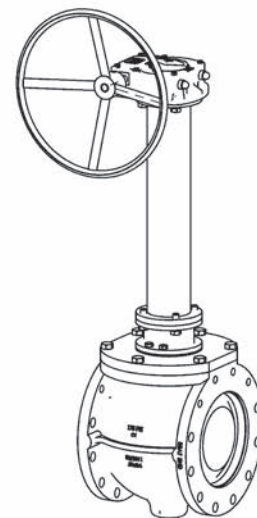

Worm Gear w/ Extended Bonnet

CRISPIN/K-FLO SERIES 800 SPECIFICATIONS

Plug Valves shall be of the non-lubricated eccentric type with an elastomer covering the entire Plug seating surfaces, both front and back. The elastomer shall be chosen for the service intended.

Flanged valves shall be manufactured in accordance with ANSI B16.1 Class 125/150 including facing, drilling and flange thickness. Mechanical joint ends shall be in compliance with AWWA/ANSI C-111-92.

Ports shall be round on sizes 2½"-12" and rectangular port design on valves 14" and larger. All valves shall be capable of being "pigged" with a soft pig when required. Valve bodies shall be of ASTM A-126 Class B cast iron in accordance with AWWA C-517.

Valves 3" and larger shall be furnished with a welded-in overlay seat of 1/8" thick of not less than 99% nickel in accordance with AWWA C-517-09, Section 4.3.3.4. Sprayed, plated or screwed-in seats are not acceptable. Plugs shall be of ASTM A-536-Grade 65-45-12 for sizes 20" and smaller, and ASTM A126 Class B Cast Iron for sizes 24" and larger in compliance with AWWA C-517.

The plugs shall be of one piece solid construction with PTFE thrust bearings on the upper and lower bearing journals to reduce torque and prevent dirt and grit from entering the bearing and seal area. Valves shall be furnished with replaceable Stainless Steel, sintered sleeve type bearings conforming to AWWA C-517. Bearings shall be of sintered, oil impregnated type 316 stainless steel ASTM A-743 Grade CF-8M.

Upper valve shaft packing shall be of the "Vee" type in accordance with AWWA C-517. Packing shall be fully adjustable and replaceable without removing the actuator from the valve.

Wrench operated valves 2½"-8" shall be capable of being converted to worm gear or automated operation without removing the bonnet or plug from the valve. All wrench operated valves shall be equipped with a 2" square nut for use with removable levers or extended "T" handles.

Worm gear operators, where required, shall be constructed with a ductile iron quadrant, a one-piece input worm shaft, and axial needle roller bearings. The one-piece worm shaft shall be manufactured of corrosion resistant Nitempered Steel.

Valves shall be designed and manufactured to shut off drip tight at 175 psi for valves 2½"-12" and 150 psi for valves 14" and larger. Each valve shall be given a hydrostatic and seat test with the test results being certified when required by the customer. Certified copies of Proof-of-Design test reports shall be furnished as outlined in AWWA C-517 when requested.

Plug valves shall be 800 Series as manufactured by Crispin/K-Flo of Berwick, PA

Crispin/K-Flo Plug Valve Sales Model Base Number Description

