



Barmesa[®]
Pumps



**ANSI Centrifugal
Process Pumps
911 Series**

▶ WHAT IS AN ANSI PUMP

In 1977, the American National Standard Institute (ANSI) established criteria for centrifugal pumps in terms of dimension, chemical composition of the materials and safety specifications, to cover the needs from chemical process industry.

Design features were established, such as being self-venting, foot mounted, center line discharge and back pull-out disassembly

The ANSI pump revolves around a basic hydraulic and mechanical design concept to ensure greater efficiency in the range of operation, flexible application and superior interchangeability.

- ▶ More than 30 different models.
- ▶ Speed and ease of repair.
- ▶ Low initial and operating costs.
- ▶ Interchangeable with other brands.
- ▶ Capacities up to 4000 GPM.
- ▶ Pressure Head up to 670 ft.
- ▶ Temperatures up to 350 F (177 C).
- ▶ Pressures up to 285 PSIG.

- ▶ Serving industries:
 - ▶ Automotive
 - ▶ Food & beverage
 - ▶ Textile
 - ▶ Petrochemical
 - ▶ Pharmaceutical
 - ▶ Chemical
 - ▶ Pulps & paper
 - ▶ General industry

- ▶ Available materials:
 - ▶ Ductile iron
 - ▶ 316 SS
 - ▶ CD4MCu



▶ ANSI 911 MODEL DESIGN

ENGINEERING THAT OFFERS FLEXIBILITY AND DURABILITY

The 911 Series is offered in a variety of sizes, capacities and materials covering every application in the process industry.

With over 30 different sizes with multiple cooling plans and seals, the Barmesa 911 Series pumps are your best choice.

Our strict quality program ensures that all components are manufactured to the highest standard for engineered tolerances.

With controlled process in our manufacturing line we have structured a state-of-the-art pump to deliver high-level solutions meeting your most critical requirement.

CNC (computer numerically controlled) machining equipment guarantees consistency for all parts.

BEARING BOX WITH EXTRA-LARGE OIL SUMP

Large oil capacity which improves heat transfer, assuring bearing longevity, quality and performance. For higher temperature applications, a variety of cooling systems can be accommodated in the 911 Series.

EXTERNAL CLEARANCE ADJUSTMENT

To maintain flow, pressure and efficiency, the tolerance between the volute and impeller is externally calibrated, minimizing energy consumptions and repairs and maximizing its performance.

HEAVY DUTY SHAFT AND BEARINGS

Engineered in accordance to ANSI standards for chemical processing to minimize vibration and shaft deflection, less than 0.002, long-term reliable function. Solid or sleeved shaft is available in different materials. Bearings life expectancy of 10-year under tough operating conditions.

OVERSIZED ADAPTER

Its construction ensures rigidity and safety, precision machining allows perfect alignment between the liquid end and the power end.

Large openings which facilitate installation and maintenance.

LABYRINTH SEALS STANDARD

All models feature INPRO® labyrinth seal made of bronze. These seals isolate environmental contaminants from lubrication media, significantly extending bearing life.

MOUNTING FRAME FLANGE

Machined to assemble motors with C-face adapters.

OVERSIZED SIGHT GLASS

One-inch bulls-eye sight glass, located on the side of the bearing unit, facilitates monitoring oil level and condition, assuring bearing longevity and efficiency.

EXTRA-HEAVY CASTINGS

All 911 Series pumps are designed with a greater thickness than conventional wall.

- ▶ Top center line, self-venting.
- ▶ Rigid casing feet prevents pipe line misalignment.
- ▶ Back pull-out design to simplify maintenance.
- ▶ The flanges meet ANSI B 16.5 requirements, Class 150FF standard flanges and Class 150 RF optional.

FULLY OPEN IMPELLER

The design of the impeller is recognized as the best in the petrochemical industry, either for handling solids, fibrous material and corrosive / abrasive fluids.

Back pump-out vanes reduce seal chamber pressure and hydraulic loads.



SEALING FLEXIBILITY


Wide range of sealing options, coupled with stuffing boxes and seal chambers to improve heat dissipation and lubrication of seal faces, maximizing pump operation.

SELF-CONTAINED VOLUTE GASKET


Provides a positive seal between the volute and the seal plate, prevents "blow out" and facilitates disassembly.

INTERCHANGEABILITY

All parts of the 911 Series are 100% interchangeable with other existing ANSI pumps. Ask your distributor for ANSI 911 parts list.

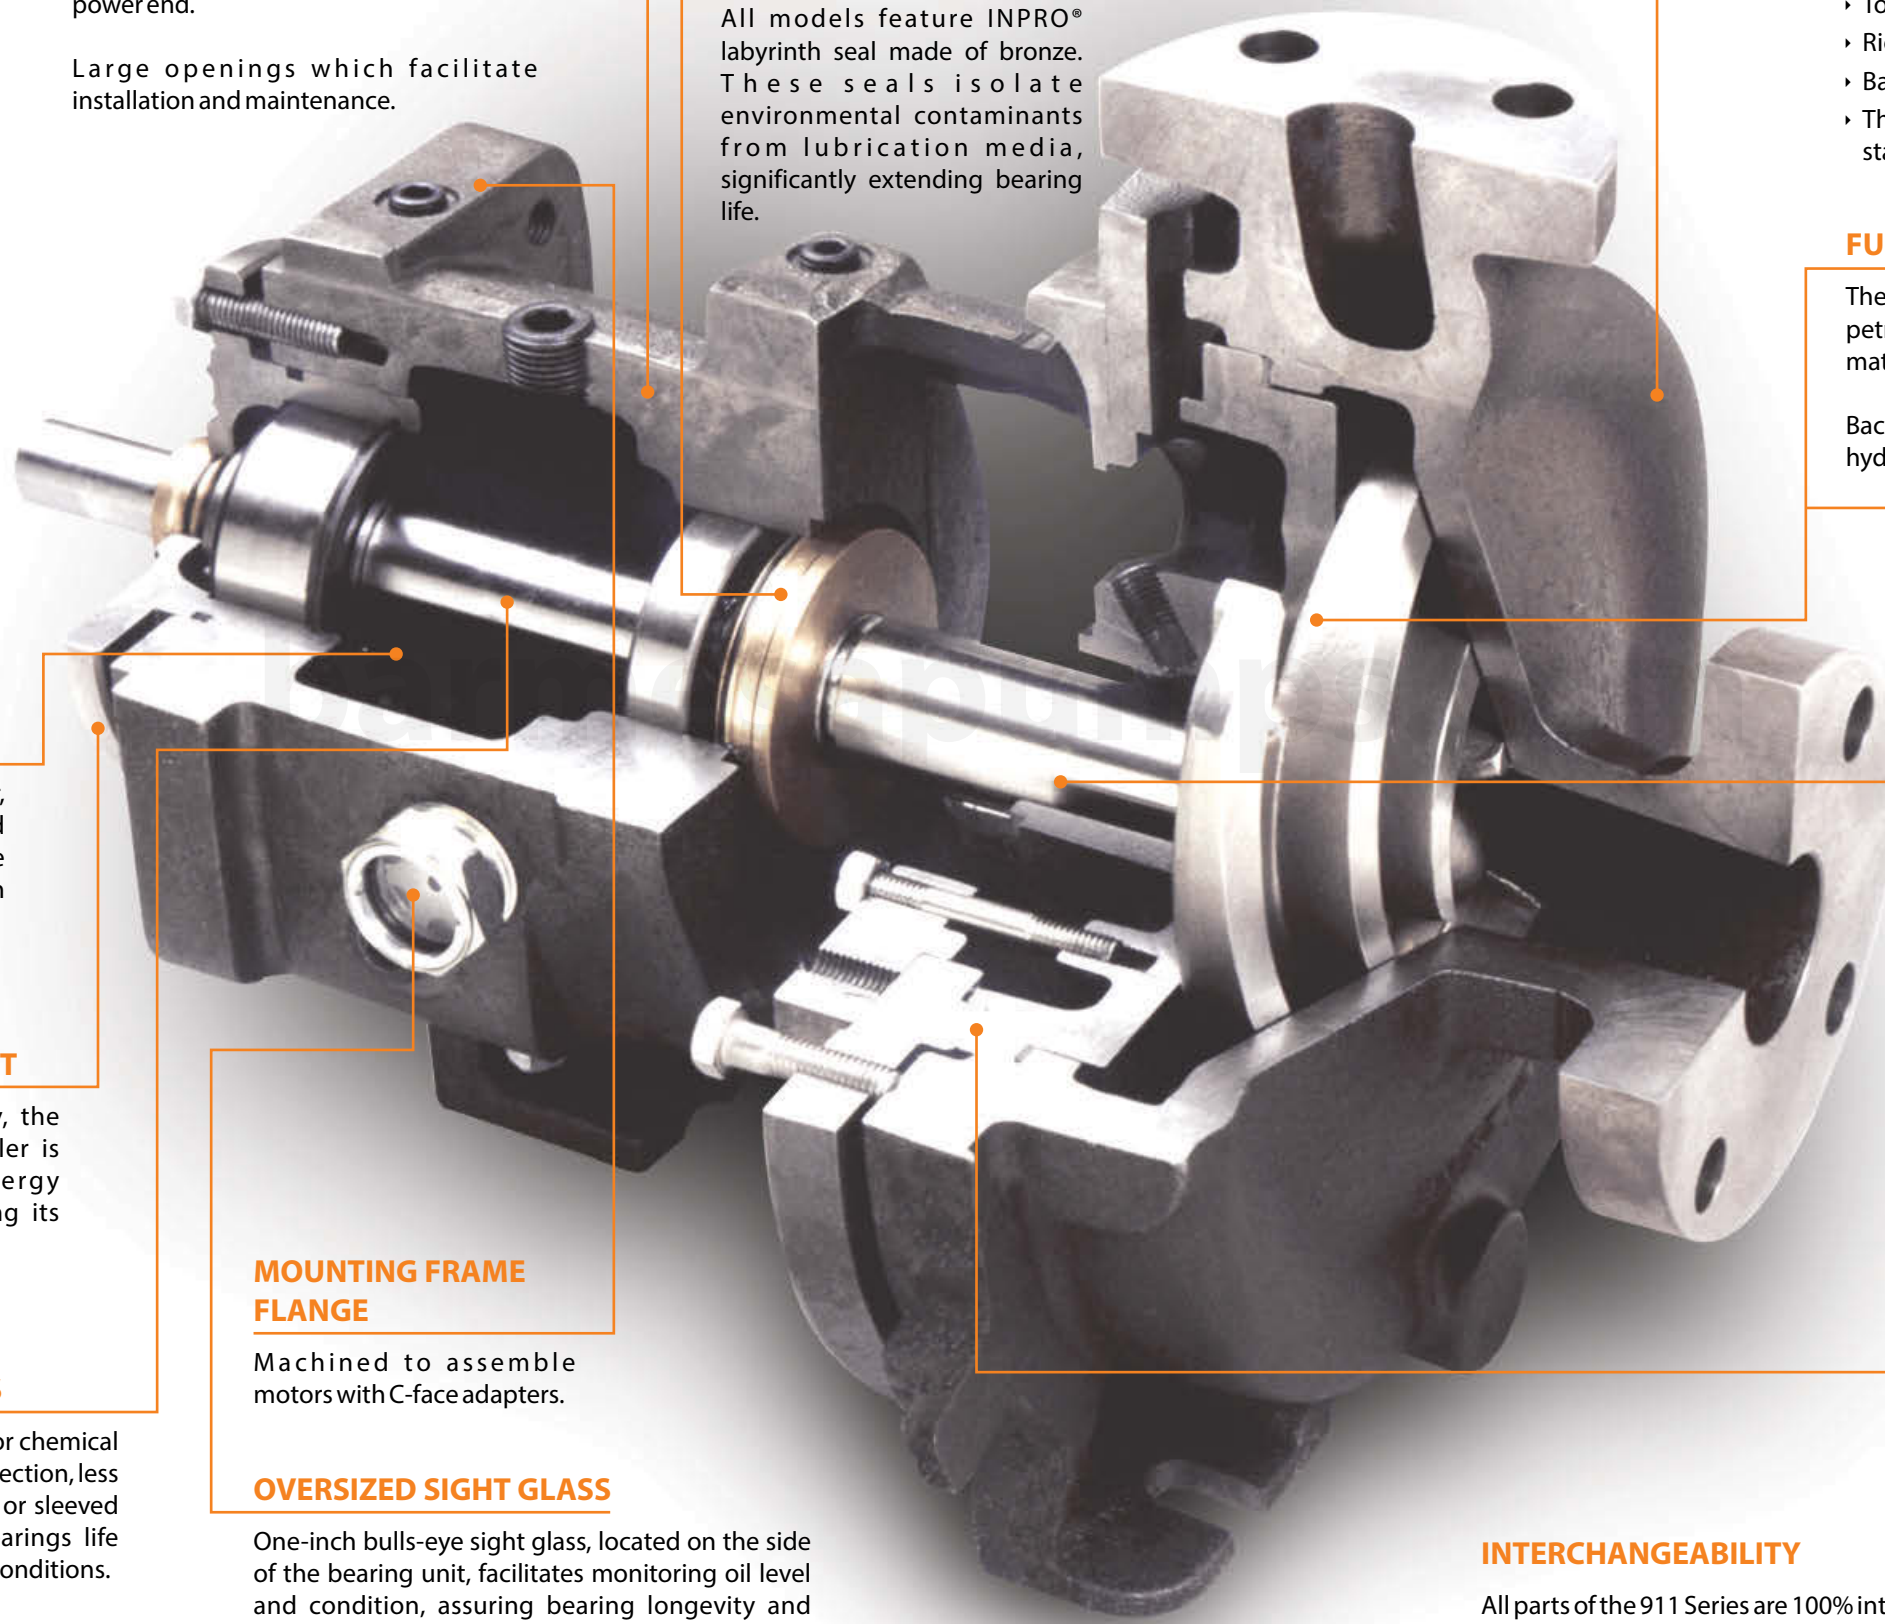

► PARTS LIST KEY

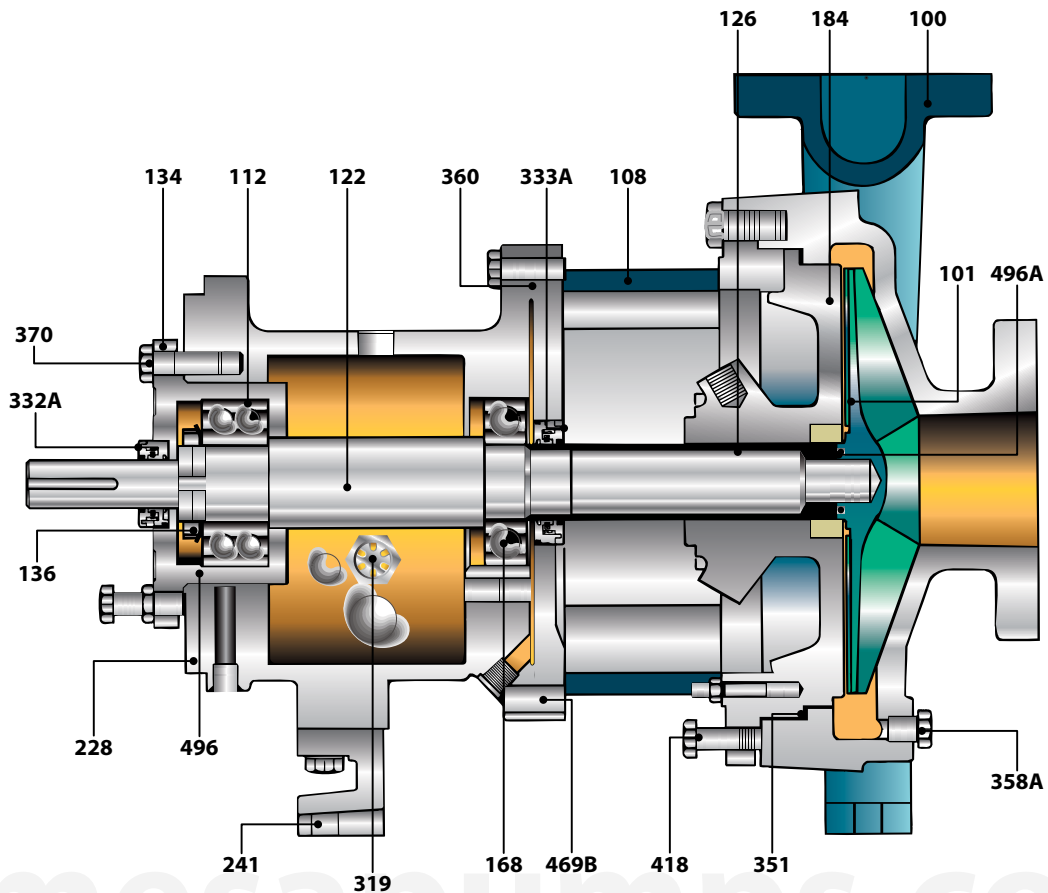


Item	Required per pump	Description	Material		
			Ductile iron	316 SS	CD4MCu
100	1	Casing	Ductile iron	316 SS	CD4MCu
101	1	Impeller	Ductile iron	316 SS	CD4MCu
108	1	Frame adapter	Ductile iron		
112	1	Outboard bearing	Steel		
122	1	Shaft - less sleeve (optional)	316 SS		
122	1	Shaft for sleeve design	AISI 4140		
126	1	Sleeve	316 SS		
134	1	Bearing housing	Ductile iron		
136	1	Thrust bearing locknut	Steel		
168	1	Inboard bearing	Steel		
184	1	Stuffing box cover	Ductile iron	316 SS	CD4MCu
228	1	Frame	Ductile iron		
241	1	Frame foot support	Ductile iron		
250	1	Flush gland mechanical seal	316 SS CD4MCu		
319	1	Sight glass	Glass / Steel		
332A	1	Outboard labyrinth seal INPRO	Bronze / Viton O-Rings		
333A	1	Inboard labyrinth seal INPRO	Bronze / Viton O-Rings		
351	1	Casing gasket	EPDM		
353	2	Gland stud	316 SS		
355	2	Gland stud nut	304 SS		
357K	2	Hex nut for 370H	304 SS		
358A	1	Drain plug (optional)	Steel	316 SS	CD4MCu
360	1	Gasket Frame-Adapter	Vellumoid		
370	3	Bolt Adapter - Casing	Steel		
418	3	Jack bolt Adapter - Casing	316 SS		
469B	2	Dowel pin Frame - Adapter	Steel		
496	2	Bearing Housing O-Ring	Buna-N		
496A	2	Impeller O-Ring	Te on		


► SPECIFICATIONS

MAX. WORKING PRESSURE LIMITS

MODELS 911S, M, L, LX
CLASS 150 FLANGES

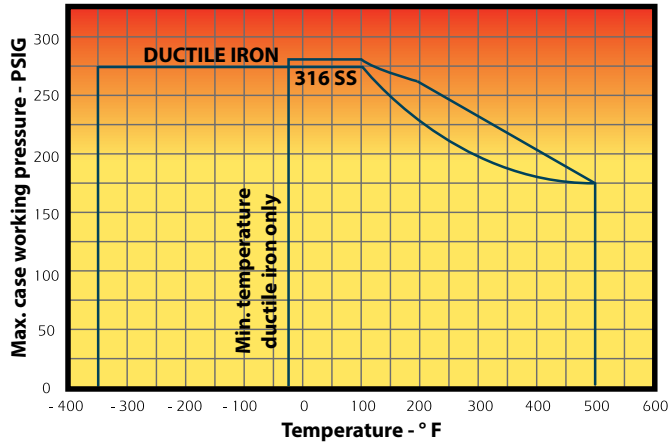


CLASS 300 FLANGES

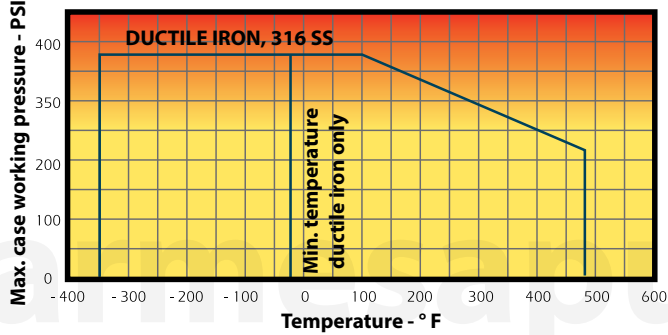

► PERFORMANCE CURVE


3500 RPM

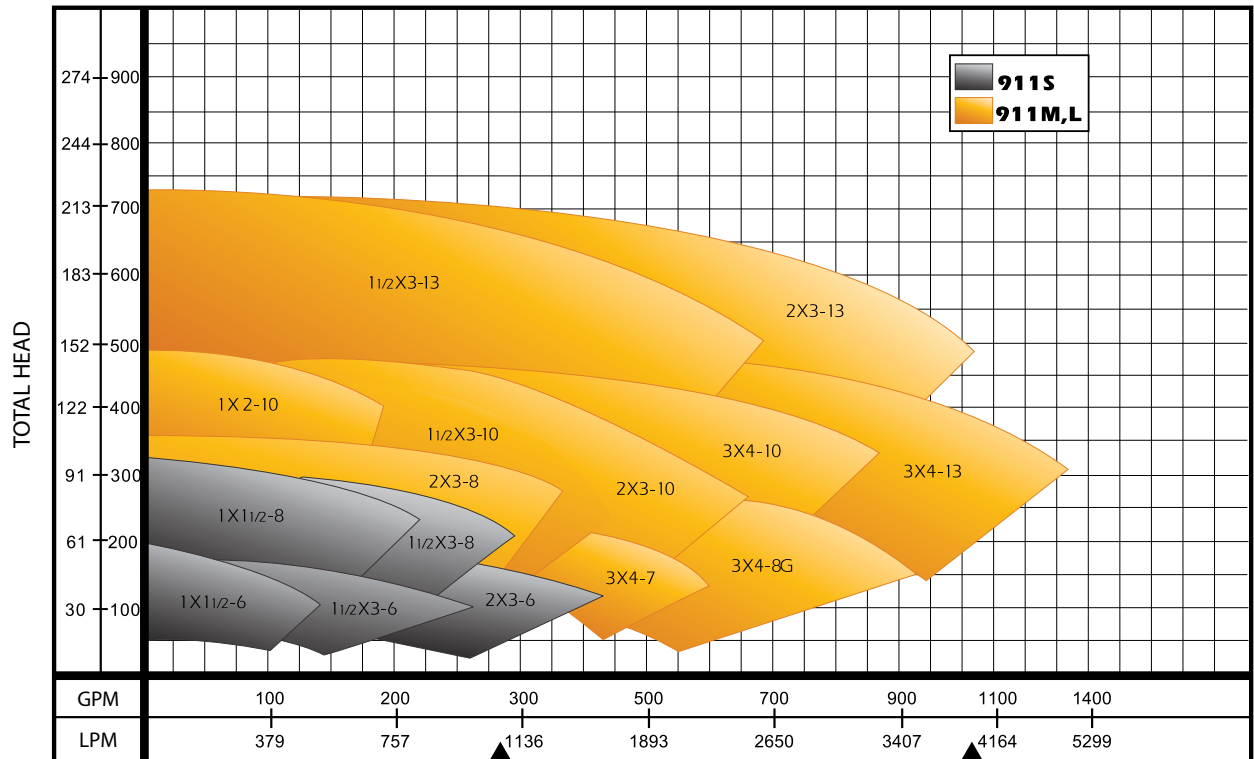

▲ = CHANGE OF SCALE

▶ PERFORMANCE CURVE

1750 RPM

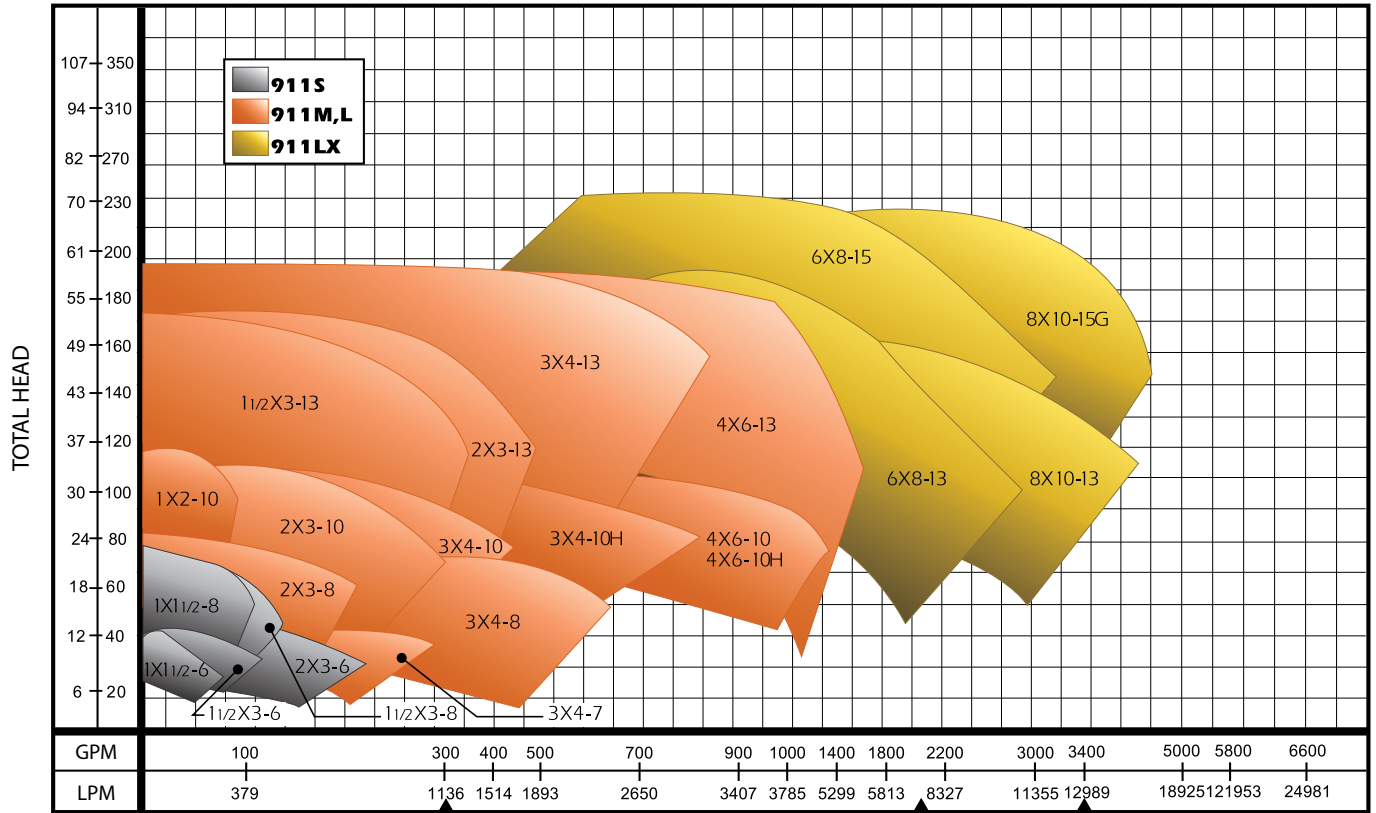


barmesapumps.com

▶ CONSTRUCTION DETAILS


SIZE & ANSI DESIGNATION	1 X 1.5 - 6 AA	1.5 X 3 - 6 AB	2 X 3 - 6	1 X 1.5 - 8 AA	1.5 X 3 - 8 AB	3 X 4 - 7 A70	2 X 3 - 8 A60	3 X 4 - 8 A70	3 X 4 - 8G A70	1 X 2 - 10 A05	1.5 X 3 - 10 A50	2 X 3 - 10 A60	3 X 4 - 10 A70	3 X 4 - 10H A40	4 X 6 - 10 A80	4 X 6 - 10H A80	1.5 X 3 - 13 A20	2 X 3 - 13 A30	3 X 4 - 13 A40	4 X 6 - 13 A80	1 X 2 - 10 A05	1.5 X 3 - 10 A50	2 X 3 - 10 A60	3 X 4 - 10 A70	3 X 4 - 10H A40	4 X 6 - 10 A80	4 X 6 - 10H A80	1.5 X 3 - 13 A20	2 X 3 - 13 A30	3 X 4 - 13 A40	4 X 6 - 13 A80	6 X 8 - 13 A90	8 X 10 - 13 A100	6 X 8 - 15 A110	8 X 10 - 15 A120	8 X 10 - 15G A120
	MODEL	911 S				911 M (max. BHP 122 HP)										911 L (max. BHP 200 HP)						911 LX														
NOMINAL CASE THICKNESS	3/8"				1/2"										9/16"						1/2"				9/16"				1/2"							
CORROSIVE ALLOWANCE @ MAX.																					1/8"															
WORKING PRESSURE																					LIMITS SET BY ANSI B16.5															
MAX. WORKING PSIG																					SEE PRESSURE / TEMPERATURE CHARTS															
HYDRO TEST PSIG @ 100° F																					150% OF WORKING PRESSURE															
MAX. LIQUID TEMPERATURE																					350° F WITHOUT COOLING															
SHAFT	DIAMETER AT COUPLING		7/8"		1 1/8"										1 1/8"						1 3/8"				2 3/8"											
	SLEEVE DIAMETER UNDER SEAL		1 3/8"		1 3/4"										1 3/4"						2 1/8"				2 1/2"											
	IMPELLER THREAD		3/4"		1"										1"						1 1/4"				1 1/2"											
	DIAMETER WITHOUT SLEEVE		1 1/8"		1 1/2"										1 1/2"						1 7/8"				2"											
	OVERHANG		6"		7 7/8"										7 7/8"						8"				9"											
BEARINGS	THRUST BEARING		SKF 5306A/C3		SKF 5309A/C3										SKF 7310 BECBM (DOUBLE)						SKF 5313A/C3															
	RADIAL BEARING		SKF 6207		SKF 6309										SKF 6311						SKF 6313															
	BEARING SPAN		6"		5 1/8"										4 1/4"						5"															
MECHANICAL SEAL SIZE		1 3/8"		1 3/4"										2 1/8"						2 1/2"																
STIFFING BOX STD.	INSIDE DIAMETER		2"		2 1/2"										2 5/8"						3 3/8"															
	DEPTH		2 7/8"		2 7/8"										2 7/8"						3"															
	DISTANCE END OF BOX TO NEAREST OBSTRUCTION		2 3/8"		2 3/8"										2 13/16"						2 7/8"															
	LANTERN RING WIDTH		7/16"		7/16"										5/8"						5/8"															

► GENERAL DIMENSIONS

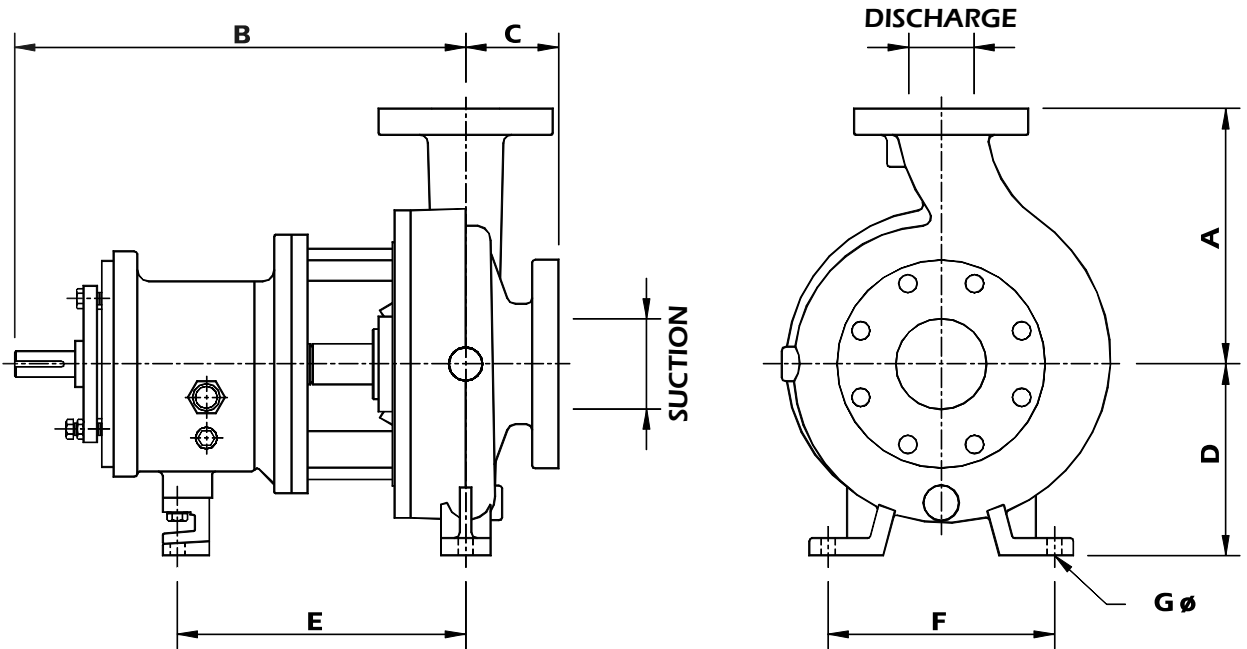

MODEL	PUMP SIZE	ANSI DESIGNATION	DISCHARGE DIAM.	SUCTION DIAM.	A	B	C	D	E	F	ØG HOLES	APROX. WEIGHT (kg)
911S	1 x 1.5 - 6	AA	1	1.5	6.5"	13.5"	4"	5.25"	7.25"	6"	0.625"	38
	1.5 x 3 - 6	AB	1.5	3								42
	2 x 3 - 6	-	2	3								43
	1 x 1.5 - 8	AA	1	1.5							0.563"	45
	1.5 x 3 - 8	AB	1.2	3								49
911M & 911L	3 x 4 - 7	A70	3	4	11"	19.5"	4"	8.25"	12.5"	9.75"	0.625"	100
	2 x 3 - 8	A60	2	3	9.5"							91
	3 x 4 - 8	A70	3	4	11"							100
	3 x 4 - 8G	A70	3	4	11"							100
	1 x 2 - 10	A05	1	2	8.5"							91
	1.5 x 3 - 10	A50	1.5	3	8.5"							100
	2 x 3 - 10	A60	2	3	9.5"			104				
	3 x 4 - 10	A70	3	4	11"			120				
	3 x 4 - 10H	A40	3	4	12.5"			138				
	4 x 6 - 10	A80	4	6	13.5"			138				
	4 x 6 - 10H	A80	4	6	13.5"			138				
	1.5 x 3 - 13	A20	1.5	3	10.5"			10"				111
	2 x 3 - 13	A30	2	3	11.5"						125	
	3 x 4 - 13	A40	3	4	12.5"						150	
4 x 6 - 13	A80	4	6	13.5"	184							
911LX	6 x 8 - 13	A90	6	8	16"	27.9"	6"	14.5"	18.75"	16"	0.875"	254
	8 x 10 - 13	A100	8	10	18"							304
	6 x 8 - 15	A110	6	8	18"							277
	8 x 10 - 15	A120	8	10	19"							336
	8 x 10 - 15G	A120	8	10	19"							710

► GENERAL DIMENSIONS (with baseplate)

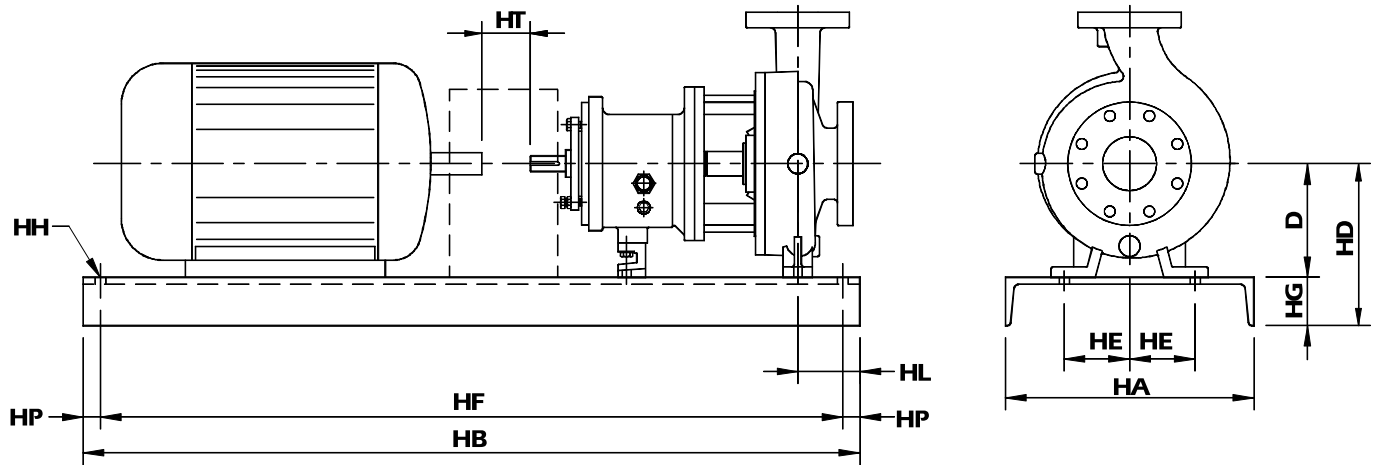

NEMA FRAME	BASEPLATE NUMBER	HA MAX.	HB MAX.	HT MIN.	HD MAX.				HE	HF	HG MAX.	HH	HL	HP
					D=5.25"	D=8.25"	D=10"	D=14.5"						
184T	139	15"	39"	3.5"	9"	-	-	-	4.5"	36.5"	3.75"	0.75"	4.5"	1.25"
256T	148	18"	48"	3.5"	10.5"	-	-	-	6"	45.5"	4.13"	0.75"	4.5"	1.25"
326TS	153	21"	53"	3.5"	12.88"	-	-	-	7.5"	50.5"	4.75"	0.75"	4.5"	1.25"
184T	245	15"	45"	3.5"	-	12"	13.75"	-	4.5"	42.5"	3.75"	0.75"	4.5"	1.25"
215T	252	18"	52"	3.5"	-	12.38"	14.13"	-	6"	49.5"	4.13"	0.75"	4.5"	1.25"
286T	258	21"	58"	3.5"	-	13"	14.75"	-	7.5"	55.5"	4.75"	1"	4.5"	1.25"
365T	264	21"	64"	3.5"	-	13.88"	14.75"	-	7.5"	61.5"	4.75"	1"	4.5"	1.25"
405TS	268	26"	68"	3.5"	-	14.88"	14.88"	-	9.5"	65.5"	4.75"	1"	4.5"	1.25"
449TS	280	26"	80"	3.5"	-	15.88"	15.88"	-	9.5"	77.5"	4.75"	1"	4.5"	1.25"
286T	368	26"	68"	5"	-	-	-	19.25"	9.5"	65.5"	4.75"	1"	6.5"	1.25"
405TS	380	26"	80"	5"	-	-	-	19.25"	9.5"	77.5"	4.75"	1"	6.5"	1.25"
449TS	398	26"	98"	5"	-	-	-	19.25"	9.5"	95.5"	4.75"	1"	6.5"	1.25"