

## 8018 COMPACT EXCAVATOR.

1. The short pitched tracks engage every tooth on the sprocket for less vibration and noise, and a far smoother ride.

3. An 8018 CTS' hydraulic hoses (including the auxiliary) are routed through the boom and arm for ultimate damage protection.

2. We've redesigned the rear structure for improved damage protection on site – there's a new 1/8" thick steel hood and an inset rear counterweight grill.




6. You can choose from JCB's huge range of specially-designed 8018 CTS attachments.

5. Dozer extensions swing out easily on an 8018 CTS, allowing operators to quickly and easily shift the dozer wings.

4. Excellent stability from the extending undercarriage. In addition to this, retracting the undercarriage improves access to confined areas.



New dig-end geometry provides extra reach, load-over height, and dig depth.

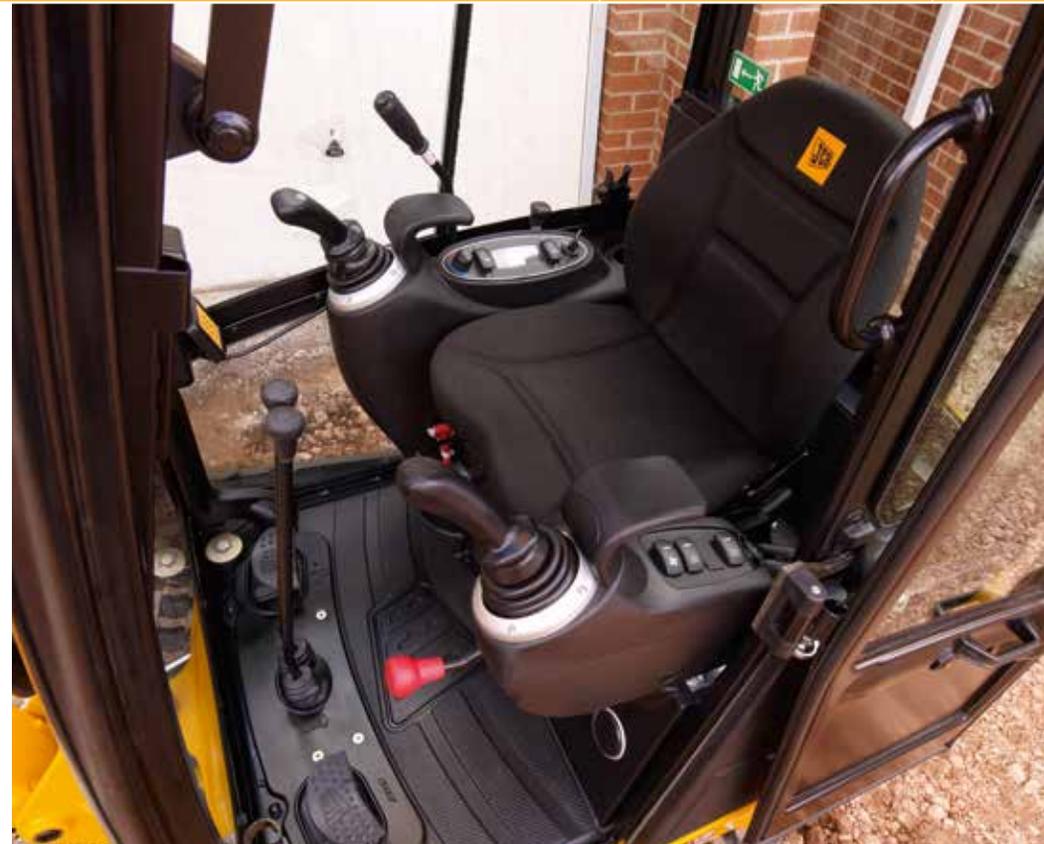

The cab is incredibly spacious and its large door provides easy, safe access.



Solid, stable work platform improves productivity, versatility and operator confidence.



The high performance tracks perform in the most arduous applications.

		8018 CTS
Operating weight standard arm	lbs	4017
Gross engine power	HP	19.7
Standard arm length	ft-in	3' 10"
Dig depth - dozer down	ft-in	9' 0"
Ground level reach	ft-in	13' 4"
Dump height	ft-in	8' 7"
Fuel tank capacity	gal	6.2
Bucket breakout force	lbf	3642