



Bobcat[®]

Compact Tractors



One Tough Animal[™]



Why compact tractors?

Compact tractors pack a lot of work potential in a small package. They are suitable for many different people, such as homeowners with acreage, animal owners, hobby farmers, as well as landscape contractors and grounds crews. Compact tractors allow so many different people to do more types of work because of their versatility. With a compact tractor you can move materials, grade driveways, mow lawns or pastures, install fences and do so much more. That versatility comes from all the attachments and implements you can use with a compact

tractor: front end loaders with buckets or pallet forks, angle blades, augers, box blades, mowers, snow blowers and tillers to name just a few.

Compact tractors are comfortable to operate and can be made even more comfortable with a wide range of comfort features, such as tilt steering, suspension seats, cruise control, even air-conditioned and heated cabs. Your compact tractor will help you connect with your land as you work in comfort on those projects around your house. And for the commercial operator, a

compact tractor is certainly more comfortable than operating a shovel or wheelbarrow all day!

There may be other machines that can get the job done, but few are easier to operate after carefully reading the operation and maintenance manual. So, if you or members of your crew are new to compact tractors, don't worry. With many sizes to choose from, there is a compact tractor ready to conquer your to-do list.

Why Bobcat Compact Tractors?

When you have a lot to do, you need a compact tractor that is easy to operate – and one that takes the headache out of changing implements. Just as importantly, you want to make your work simple, quick and enjoyable.

Nobody knows this better than Bobcat. For more than a half-century, Bobcat® equipment has been doing the world's toughest work. Our loaders, excavators, utility vehicles, telescopic tool carriers and utility work machines work on more jobsites than any other brand, and our attention to fit and finish enables operators to stay productive and comfortable.

Now Bobcat offers a new line of compact tractors with the same toughness, agility and versatility that have made the brand a worldwide icon of productivity and reliability. They're ready to hook up to a wide variety of hard-working, rugged implements that eliminate hand labor from your day. Plus, you'll have access to one of the world's best dealer networks for easy access to parts and factory-trained service.

Like all Bobcat equipment, these agile machines are strong enough for your biggest jobs, but small enough to work in tight areas. What's more, Bobcat compact tractors provide premium features as standard equipment – such as telescoping lower links, tilt steering

and a suspension seat. Often these same features are considered optional on other brands, or they come with a hefty price increase.

With its outstanding value, extraordinary versatility, superior comfort, and those familiar colors, nothing works harder than a Bobcat compact tractor.

Bobcat compact tractors have many benefits to help you:

- Do more
- Do it faster
- Make work enjoyable
- Operate like an extension of your own arm
- Get more uptime and do less upkeep
- Operate a wide variety of implements and attachments
- Tailor your machine with options and accessories

Do more.

The 3-point hitch – the business end of your tractor. Every compact tractor has one, but Bobcat's is better. This is where your implement changes occur, making it one of the most important features to consider. Throughout the day, you can go from mowing to grading to digging a hole – so the easier it is to hook up implements and attachments, the more useful your tractor will be.

Bobcat makes premium features standard on its tractors – so those attachments and implements are easy to switch, and easy to use. You'll be able to do more tasks, do them better and do them more easily. That goes a long way to improve your results, and make your toughest work more agreeable.

3-Point Hitch Versatility

With a wide variety of available implements, you can tackle any job. And as you go from one job to another, you will need to change your implements. Bobcat 3-point hitches are designed so one person can quickly change implements as the job requires – without constantly climbing on and off the tractor to check your link positioning or calling neighbors and dealerships for help.

Telescoping lower links are typically found on premium machines, but they come standard on most Bobcat® compact tractors. This handy 3-point hitch feature eliminates the need to precisely position the tractor when hooking up an implement. Just pull in close to the implement, extend the links and secure with pins.



Easily adjust the links from side to side, or up and down with our telescoping sway bars and **crank-style lower link**

adjustment. There are no rusty, dirty turnbuckles to fight with. Just adjust your lower links from side to side, extend the sway bars and secure with pins. Turn the crank to raise or lower the link, and you're ready to work!





PTO Versatility

Every Bobcat tractor comes with rear Power Take-Off (PTO) for your rear-mounted implements, and

optional **mid-PTO** operates plenty of powered implements that eliminate difficult hand labor – mowers, tillers, snowblowers and more. Live or independent PTO helps you to get more flexibility for the jobs you do:

Live PTO is available on models CT235 and lower, enabling your PTO to stay engaged at full speed as you stop or change directions while mowing around landscape features. This provides a better work result in tight areas, delivering consistent, even cutting and superior attachment performance.

Independent PTO is a premium feature that comes standard on Bobcat tractor models CT335 and up. With independent PTO, you just flip a switch to engage or disengage the PTO without stopping the tractor or using a clutch. It comes in handy on many jobs. For example, when you're using an auger, you can stop the attachment as you move from one hole to the next.

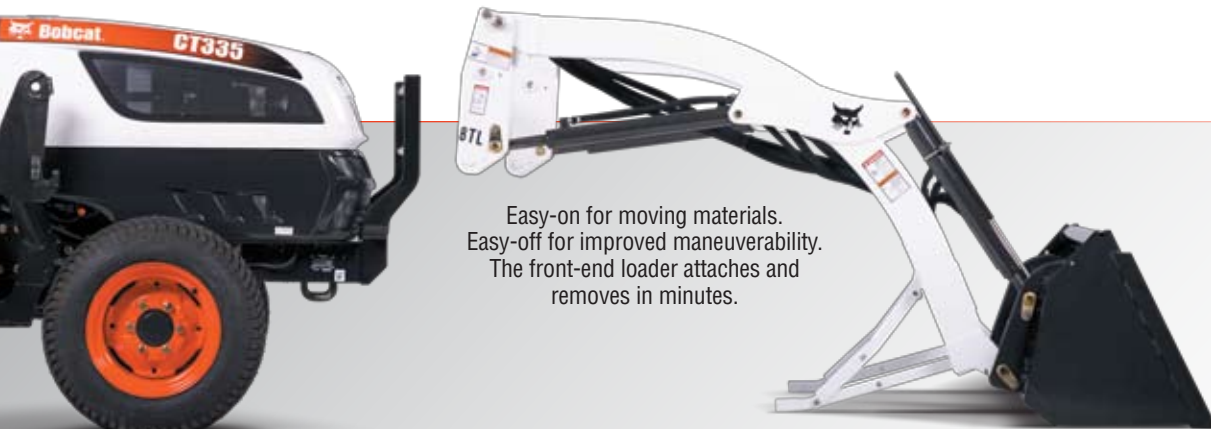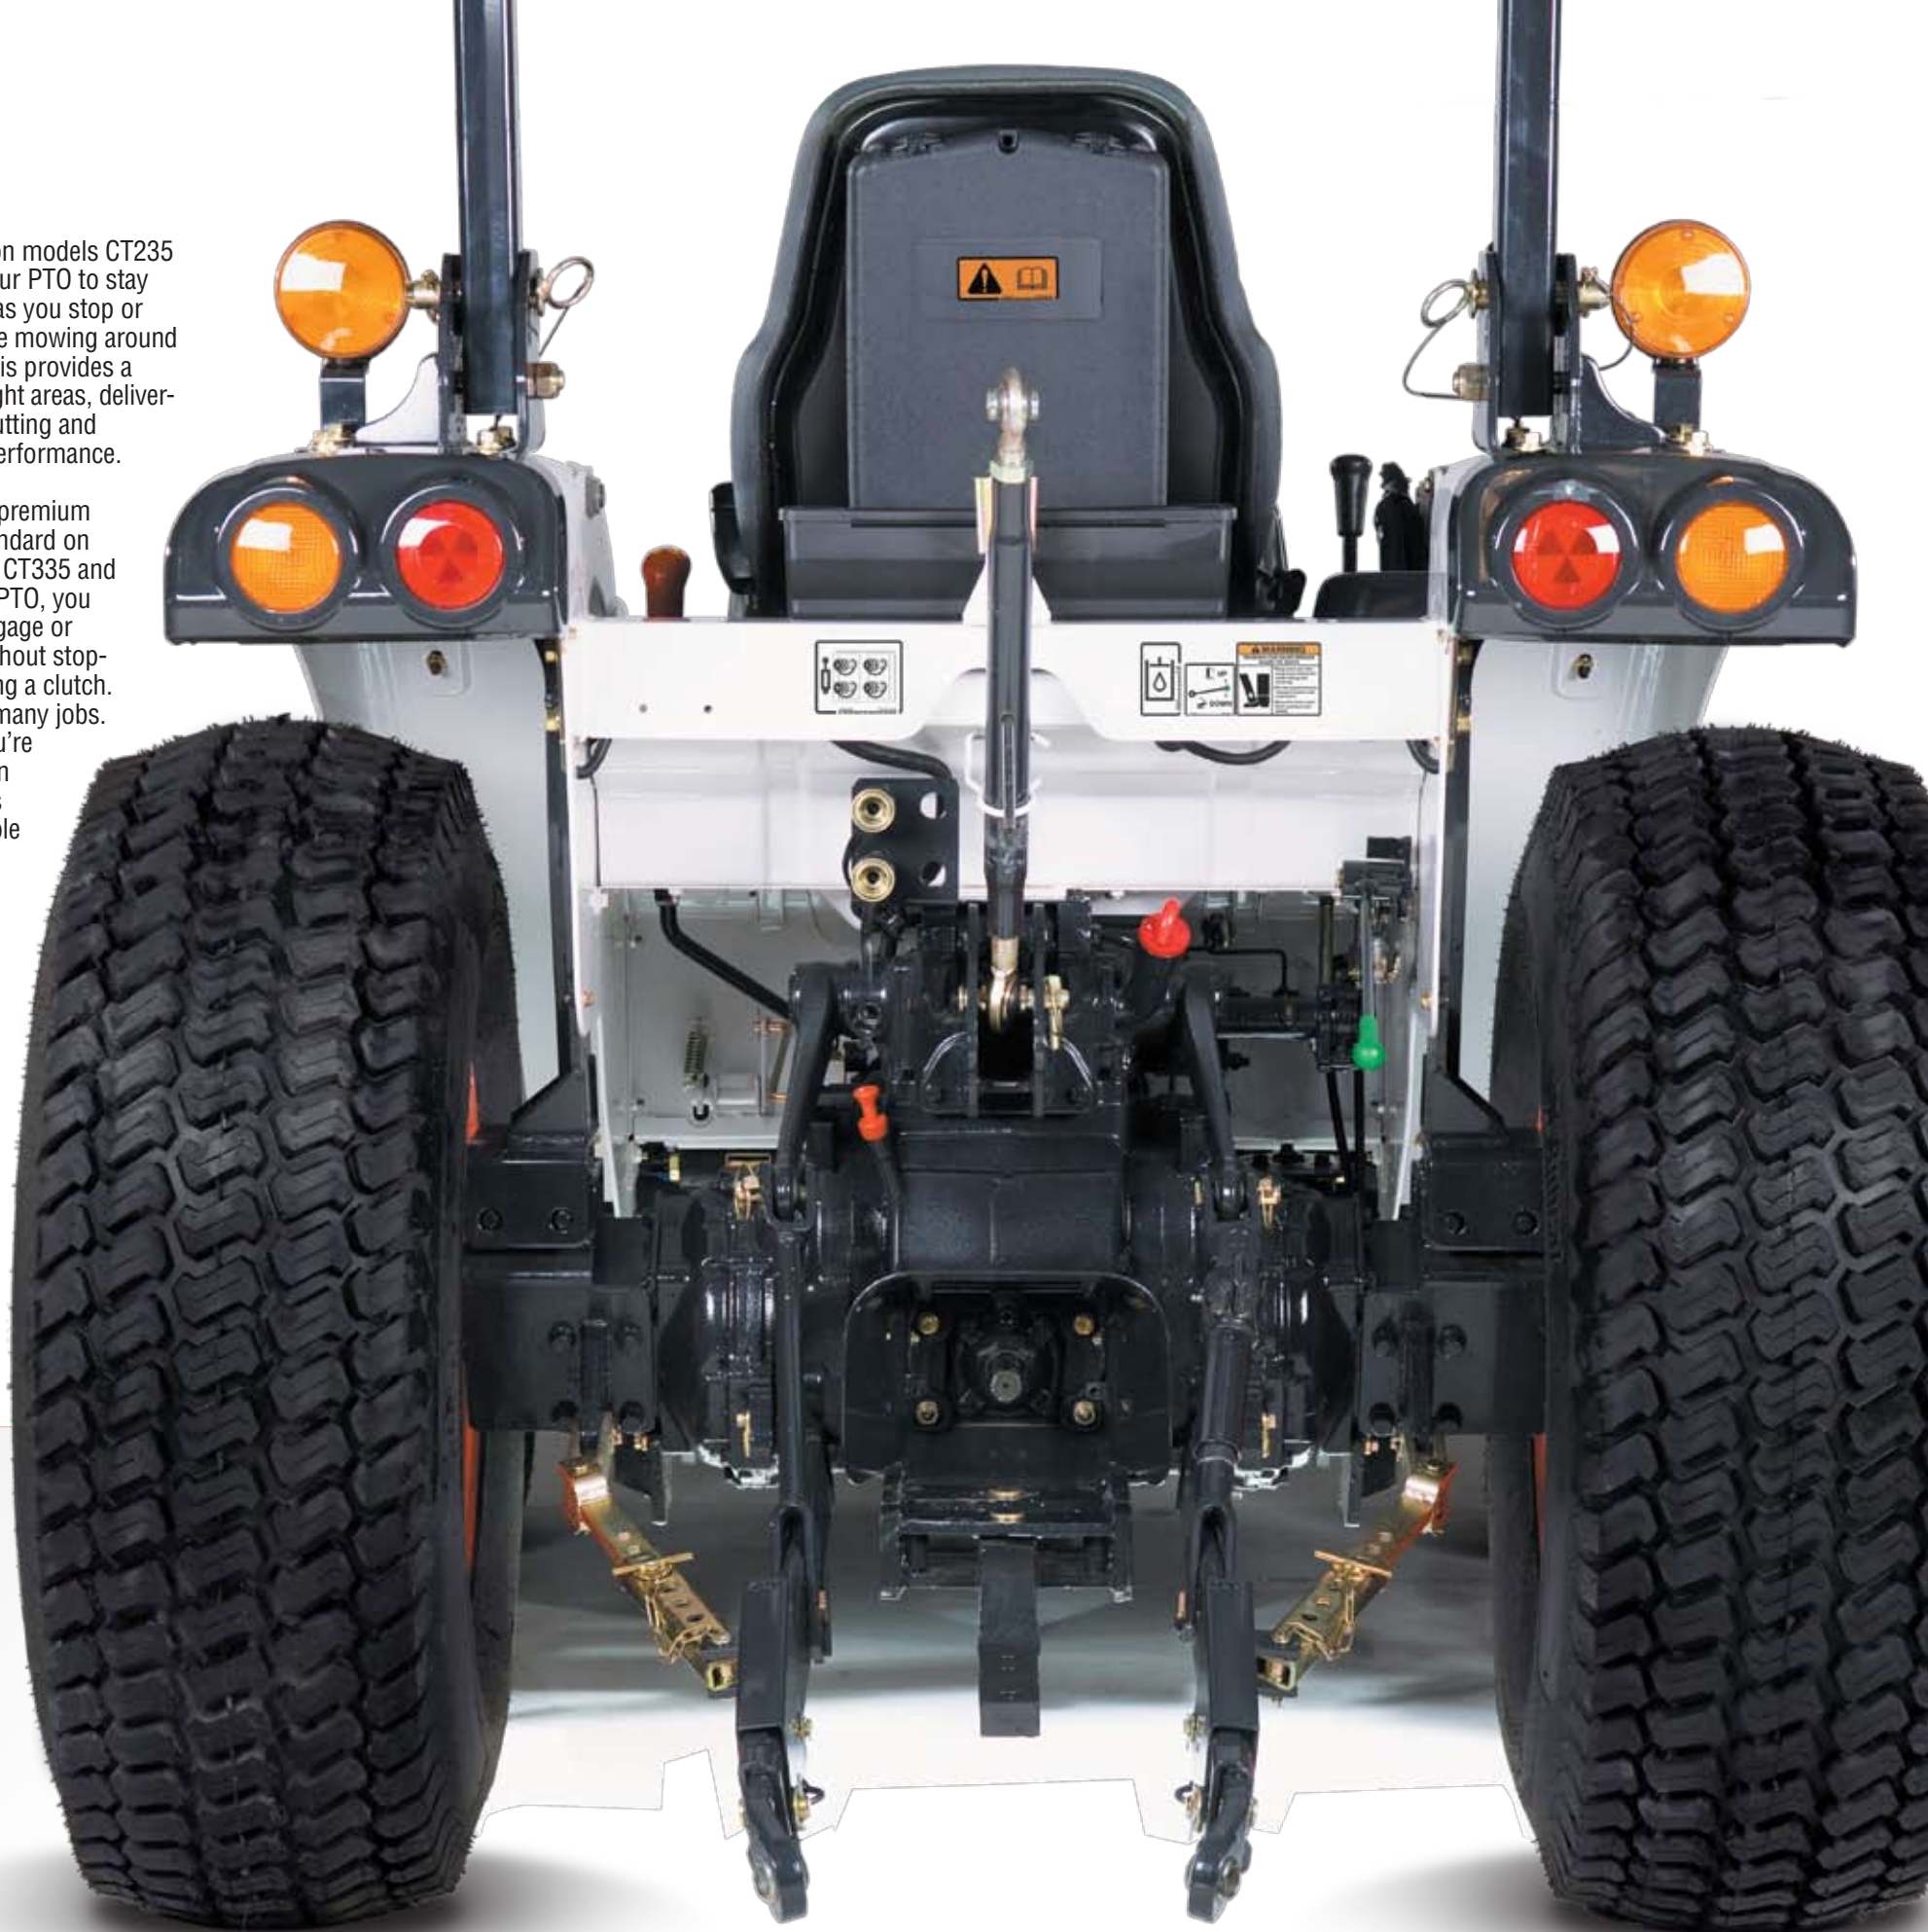

Easy-on for moving materials. Easy-off for improved maneuverability. The front-end loader attaches and removes in minutes.

Front-End Loader Versatility

Easily move or carry dirt, mulch or manure; dig dirt and dump material with our front-end loader. Bobcat's dual hydraulic pumps, together with greater tractive effort, provide consistent, ample power for lifting. A bucket level

indicator is constantly in your view, preventing spillage and boosting your carrying capabilities. The optional Bob-Tach™ mounting system makes it quick to change buckets or hook up a pallet fork for moving materials.



Optional Bob-Tach™

Want to learn more about everything you can do with your tractor? Visit www.bobcat.com/tractorsdomore

Specifications Bobcat® Compact Tractors

Model	CT120	CT122	CT225	CT230	CT235	CT335	CT440	CT445	CT450
Engine	Diesel - Tier II	Diesel - Tier IV	Diesel - Interim Tier IV	Diesel - Interim Tier IV	Diesel - Interim Tier IV	Diesel - Interim Tier IV	Diesel - Interim Tier IV	Diesel - Interim Tier IV	Diesel - Interim Tier IV
Gross Horsepower	21 hp (15.7 kW)	22 hp (16.4 kW)	27 hp (20.1 kW)	30 hp (22.4 kW)	34 hp (26.1 kW)	38 hp (28.3 kW)	41 hp (30.6 kW)	45 hp (33.6 kW)	49 hp (37.3 kW)
No. of Cylinders	3	3	3	3	3	3	4	4	4
Total Displacement	56.6 cu. in. (0.9 L)	61.5 cu. in. (1.0L)	85.4 cu. in. (1.4 L)	91.5 cu. in. (1.5 L)	97.6 cu. in. (1.6 L)	109.8 cu. in. (1.80 L)	122 cu. in. (2.0 L)	134.3 cu. in. (2.2 L)	146.5 cu. in. (2.4 L)
Fuel Tank Capacity (gallons)	5.3 gal. (20.0 L)	5.3 gal. (20.0 L)	7.9 gal. (30.0 L)	7.9 gal. (30.0 L)	7.9 gal. (30.0 L)	11.9 gal. (45.0 L)	11.9 gal. (45.0 L)	11.9 gal. (45.0 L)	11.9 gal. (45.0 L)
3 pt., PTO, & Hydraulics									
PTO Horsepower	14.5 hp (10.8 kW)	16.2 hp (12.1 kW)	19.5 hp (14.5 kW)	22 hp (16.4 kW)	26.5 hp (19.8 kW)	26.5 hp (19.7 kW)	30 hp (22.3 kW)	34 hp (25.4 kW)	38 hp (28.3 kW)
3 pt. Hitch	Category I	Category I	Category I	Category I	Category I	Category I	Category I	Category I	Category I
Lift Control Type	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System
Lift capacity at 24" behind lift points (per SAE J283)	860 lb. (390 kg)	860 lb. (390 kg)	1508 lb. (684 kg)	1508 lb. (684 kg)	1508 lb. (684 kg)	1700 lb. (771 kg)	1870 lb. (848 kg)	1870 lb. (848 kg)	1870 lb. (848 kg)
Maximum hydraulic lift capacity at 24" behind lift points (measured at 15" above ground)*	1200 lb. (544 kg)	1200 lb. (544 kg)	1676 lb. (760 kg)	1676 lb. (760 kg)	1676 lb. (760 kg)	2475 lb. (1122 kg)	2625 lb. (1190 kg)	2625 lb. (1190 kg)	2625 lb. (1190 kg)
Rear PTO	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm
Rear PTO system	Live	Live	Live	Live	Live	Independent	Independent	Independent	Independent
Mid PTO (optional)	2000 rpm	2000 rpm	2000 rpm	2000 rpm	2000 rpm	2000 rpm	2000 rpm	2000 rpm	2000 rpm
Total Hydraulic Pump Capacity	7.7 gpm (29.0 L/min.)	7.7 gpm (29.0 L/min.)	12.2 GPM (46.2 L/min.)	12.2 GPM (46.2 L/min.)	12.2 GPM (46.2 L/min.)	14.5 GPM (54.9 L/min.)	16.1 GPM (61.0 L/min.)	16.1 GPM (61.0 L/min.)	16.1 GPM (61.0 L/min.)
Implement			7.9 GPM (29.9 L/min.)	7.9 GPM (29.9 L/min.)	7.9 GPM (29.9 L/min.)	9.5 GPM (36.0 L/min.)	9.5 GPM (36.0 L/min.)	9.5 GPM (36.0 L/min.)	9.5 GPM (36.0 L/min.)
Steering			4.3 GPM (16.3 L/min.)	4.3 GPM (16.3 L/min.)	4.3 GPM (16.3 L/min.)	6.6 GPM (25.0 L/min.)	6.6 GPM (25.0 L/min.)	6.6 GPM (25.0 L/min.)	6.6 GPM (25.0 L/min.)
Rear Hydraulics (optional)	Single	Single	Single or Dual	Single or Dual	Single or Dual	Single or Dual	Single or Dual	Single or Dual	Single or Dual
Telescopic Stabilizers	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Lower Links	Rigid	Rigid	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic
Lifting Rod	Turnbuckle	Turnbuckle	Crank	Crank	Crank	Crank	Crank	Crank	Crank
Drive System									
Transmission	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Speed Ranges	2	2	3	3	3	3	3	3	3
Brakes	Wet Disc	Wet Disc	Wet Disc	Wet Disc	Wet Disc	Wet Disc	Wet Disc	Wet Disc	Wet Disc
Rear Diff. Lock	Std	Std	Std	Std	Std	Std	Std	Std	Std
Four-Wheel Drive	Std	Std	Std	Std	Std	Std	Std	Std	Std
Travel Speeds (w/Ag Tires)									
Range 1 (low)	0-3.6 mph (0-5.8 km/hr.)	0-3.6 mph (0-5.8 km/hr.)	0-3.3 mph (0-5.3 km/hr.)	0-3.3 mph (0-5.3 km/hr.)	0-3.3 mph (0-5.3 km/hr.)	0-3.7 mph (0-5.9 km/hr.)	0-3.9 mph (6.3 km/hr.)	0-3.9 mph (6.3 km/hr.)	0-3.9 mph (6.3 km/hr.)
Range 2 (med)	n/a	n/a	0-6.4 mph (0-10.3 km/hr.)	0-6.4 mph (0-10.3 km/hr.)	0-6.4 mph (0-10.3 km/hr.)	0-6.4 mph (0-10.2 km/hr.)	0-6.7 mph (10.8 km/hr.)	0-6.7 mph (10.8 km/hr.)	0-6.7 mph (10.8 km/hr.)
Range 3 (high)	0 - 9.3 mph (0-15.0 km/hr.)	0 - 9.3 mph (0-15.0 km/hr.)	0 - 13.1 mph (0-20.9 km/hr.)	0 - 13.1 mph (0-20.9 km/hr.)	0 - 13.1 mph (0-20.9 km/hr.)	0-15.7 mph (0-25.2 km/hr.)	0-16.5 mph (26.5 km/hr.)	0-16.5 mph (26.5 km/hr.)	0-16.5 mph (26.5 km/hr.)
Reverse	0 - 5.8 mph (0-9.4 km/hr.)	0 - 5.8 mph (0-9.4 km/hr.)	0 - 8.2 mph (0-13.2 km/hr.)	0 - 8.2 mph (0-13.2 km/hr.)	0 - 8.2 mph (0-13.2 km/hr.)	0-10.7 mph (0-17.0 km/hr.)	0-11.2 mph (17.8 km/hr.)	0-11.2 mph (17.8 km/hr.)	0-11.2 mph (17.8 km/hr.)
Dimensions									
Overall Length (w/ 3 pt.)	105.7 in. (2684 mm)	105.7 in. (2684 mm)	122.2 in. (3104 mm)	122.2 in. (3104 mm)	122.2 in. (3104 mm)	129.1 in. (3279 mm)	134.3 in. (3411 mm)	134.3 in. (3411 mm)	134.3 in. (3411 mm)
Overall Width (w/ Ag. Tires)	46.5 in. (1181 mm)	46.5 in. (1181 mm)	55.4 in. (1383 mm)	55.4 in. (1383 mm)	55.4 in. (1383 mm)	62.6 in. (1590 mm)	69 in. (1753 mm)	69 in. (1753 mm)	69 in. (1753 mm)
Overall Height (w/ ROPS up)	81.8 in. (2078 mm)	81.8 in. (2078 mm)	95.9 in. (2436 mm)	95.9 in. (2436 mm)	95.9 in. (2436 mm)	93.6 in. (2377mm)	95.5 in. (2426 mm)	95.5 in. (2426 mm)	95.5 in. (2426 mm)
Wheelbase	57.9 in. (1470 mm)	57.9 in. (1470 mm)	66.1 in. (1679 mm)	66.1 in. (1679 mm)	66.1 in. (1679 mm)	69.3 in. (1761 mm)	73.8 in. 91875 mm)	73.8 in. 91875 mm)	73.8 in. 91875 mm)
Ground Clearance	10.7 in. (271 mm)	10.7 in. (271 mm)	9.9 in. (252 mm)	9.9 in. (252 mm)	9.9 in. (252 mm)	14 in. (356 mm)	14 in. (356 mm)	14 in. (356 mm)	14 in. (356 mm)
Weight	1969 lb. (893 kg)	2056 lb. (933 kg)	3028 lb. (1373 kg)	3056 lb. (1386 kg)	3056 lb. (1386 kg)	3668 lb. (1664 kg)	3847 lb. (1745 kg)	3881 lb. (1760 kg)	3935 lb. (1785 kg)
Steering									
Inside Turning Radius	Hydrostatic power steering 89 in. (2261 mm)	Hydrostatic power steering 89 in. (2261 mm)	Hydrostatic power steering 114 in. (2896 mm)	Hydrostatic power steering 114 in. (2896 mm)	Hydrostatic power steering 114 in. (2896 mm)	Hydrostatic power steering 126 in. (3200 mm)	Hydrostatic power steering 132 in. (3353 mm)	Hydrostatic power steering 132 in. (3353 mm)	Hydrostatic power steering 132 in. (3353 mm)
Tilt Steering Wheel	N/A	N/A	Std	Std	Std	Std	Std	Std	Std
Tire Sizes									
General Purpose - Front/Rear	23x8.5-12 4PR / 12-16.5 6PR	23x8.5-12 4PR / 12-16.5 6PR	25x8.5-14 6PR / 15x19.5 8PR	25x8.5-14 6PR / 15x19.5 8PR	25x8.5-14 6PR / 15x19.5 8PR	27x10.5-15 6PR / 43x16-20 4PR	10x16.5 6PR / 14.9x24 8PR	10x16.5 6PR / 14.9x24 8PR	10x16.5 6PR / 14.9x24 8PR
Turf - Front/Rear	23x8.5-12 4PR / 33x12.5-16.5 4PR	23x8.5-12 4PR / 33x12.5-16.5 4PR	27x8.5-15 4PR / 41x14-20 4PR	27x8.5-15 4PR / 41x14-20 4PR	27x8.5-15 4PR / 41x14-20 4PR	27x8.5-15 10PR / 41x14-20 4PR	29x12.5-15 8PR / 21.5Lx16.1 4PR	29x12.5-15 8PR / 21.5Lx16.1 4PR	29x12.5-15 8PR / 21.5Lx16.1 4PR
Ag. - Front/Rear	6x12 6PR / 9.5x16 6PR	6x12 6PR / 9.5x16 6PR	7x14 8PR / 11.24x24 6PR	7x14 8PR / 11.24x24 6PR	7x14 8PR / 11.24x24 6PR	7x16 10PR / 12.4x24 8PR	8x16 10PR / 13.6x24 6PR	8x16 10PR / 13.6x24 6PR	8x16 10PR / 13.6x24 6PR
Attachments									
Loader Lift Capacity @ 500mm in front of bucket pin (w/Rear Ballast)	830 lb. (376 kg)	830 lb. (376 kg)	1225 lb. (556 kg)	1225 lb. (556 kg)	1225 lb. (556 kg)	1300 lb. (589 kg)	2050 lb. (929 kg)	2050 lb. (929 kg)	2050 lb. (929 kg)
Loader Lift Capacity @ Bucket Pivot (w/Rear Ballast)	1140 lb. (517 kg)	1140 lb. (517 kg)	1605 lb. (728 kg)	1605 lb. (728 kg)	1605 lb. (728 kg)	1650 lb. (748 kg)	2600 lb. (1179 kg)	2600 lb. (1179 kg)	2600 lb. (1179 kg)
Bucket Widths	48 in., 54 in.	48 in., 54 in.	54 in., 60 in., 68 in.	54 in., 60 in., 68 in.	54 in., 60 in., 68 in.	54 in., 60 in., 68 in., 72 in.	54 in., 60 in., 68 in., 72 in.	54 in., 60 in., 68 in., 72 in.	54 in., 60 in., 68 in., 72 in.
Loader Max Lift Height	73.3 in. (1862 mm)	73.3 in. (1862 mm)	84.3 in. (2141 mm)	84.3 in. (2141 mm)	84.3 in. (2141 mm)	98.1 in. (2492 mm)	112.1 in. (2847 mm)	112.1 in. (2847 mm)	112.1 in. (2847 mm)

*Note: Hydraulic 3pt. lift capacity will vary depending on lift point height

Standard Features

- Suspension Seat
- Cup Holder
- Glow Plug Engine Pre-heat
- Toolbox
- Headlights/Tail Lights/Brake Lights
- Cruise Control
- Spark Arrestor Muffler
- Horn/Hazard Flasher/Turn Signals

OPTIONAL BOB-TACH™



Safety Equipment

- Safety Interlock System (neutral start-operating)
- Fold-Down or Cab-Enclosed ROPS (roll-over protection structure)
- Fully Retractable Seatbelt

OPTIONAL REAR REMOTE HYDRAULIC VALVES



Training Resources

Train operators and technicians in the safe operation and servicing of Bobcat equipment. Operator training courses, safety videos and other training materials are available at your Bobcat dealer's parts department or online at www.bobcat.com/training or www.training.bobcat.com

OPTIONAL CAB



Outfit your tractor to meet your specific job requirements – or just increase your comfort level.

- Comfort:**
- Cab with Heat and Air Conditioning
- Sun Shade
- Deluxe Suspension Seat

Options & Accessories

- Mechanical:**
- Locking Fuel Cap Kit
- Mid PTO
- Bob-Tach™
- Loader Joystick and Control Valve
- Rear Remote Hydraulic Valve
- Jobsite:**
- Backup Alarm
- Slow Moving Vehicle Emblem Kit
- Grill Guard
- Lighting:**
- Rear Work Light
- Tire:**
- General Purpose Tires
- Turf Tires
- Ag Tires
- Spare Tire and Rim Assemblies