


FlexZone Wireless Gate Sensor (Battery-Powered)

E7EM0201

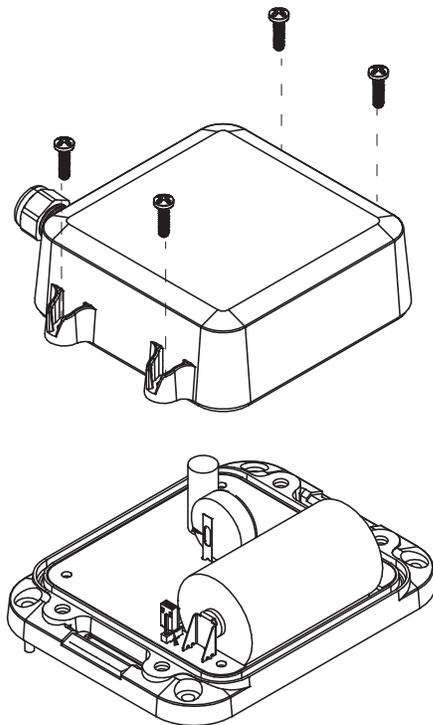

Description

The FlexZone Wireless Gate Sensor is an accelerometer-based intrusion detection sensor that detects attempts to open, cut, climb, or otherwise break through a sliding or swinging gate. The sensor module is attached directly to the gate panel with tie-wraps and communicates with a nearby receiver card (installed in a FlexZone processor) over an encrypted wireless link.

The sensor module includes an auxiliary input for monitoring gate contacts.

Physical Specifications

- Dimensions: (L/W/D): 12.0 x 9.5 x 4.3 cm (4.7 x 3.7 x 1.7 in) (not including auxiliary input cable)
- Weight: 283 g (0.62 lbs) (includes battery)
- Cable entry point with compression gland

RF Specifications

- 128-bit encrypted communications link
- Unlicensed operation in regional ISM band
- RF output power: 17 dBm

Power Specifications

- D-sized battery (1.5V)

Environmental Specifications

- Operating temperature: -40 to 70 °C (-40 to 158 °F)
- Humidity: 100% (condensing)
- Sensor module: All-weather ASA casing,
- NEMA 4 (IP66) ingress rating

Regulatory Compliance

- FCC part 15 / IC RSS-247
- ETSI EN 300 220
- EN 50130-4
- IEC 60950-1

See the FlexZone Wireless Gate Sensor Datasheet for a full system description.

info@senstar.com • senstar.com