



FREE FLOAT[®] DRAIN TRAP

MODEL SS1VA

DRAIN TRAP WITH TIGHT SHUT-OFF FOR AIR AND INERT GASES

Benefits

All stainless steel trap to be installed vertically in pipe ends. Automatically drains condensate from air and inert gas systems.

1. Constant water seal and unique rotational seating design prevent concentrated wear to ensure long life.
2. Three-point seating provides a tight seal even under low-load conditions.
3. Easy, inline access to internal parts simplifies cleaning and lowers maintenance costs.
4. Built-in screen with large surface area ensures extended trouble-free service.



Specifications

Model	SS1VA-R (Rubber Orifice)	SS1VA-M (Metal Orifice)
Connection	Screwed	
Size (in)	1	
Orifice No.	10	10, 21
Maximum Operating Pressure (psig) PMO*	150	150, 300
Maximum Differential Pressure (psi) ΔPMX*	150	150, 300
Minimum Operating Pressure (psig)	Vacuum	
Maximum Operating Temperature (°F) TMO	212	428
Maximum Allowable Pressure (psig) PMA	300	
Maximum Allowable Temperature (°F) TMA	428	
Applicable Fluids*	Air, Inert Gas	

* For specific gravities other than 1.00, use table below

Connections and sizes in bold are standard


Model	Orifice No.	Specific Gravity										
		1.00	0.99-0.95	0.94-0.90	0.89-0.85	0.84-0.80	0.79-0.75	0.74-0.70	0.69-0.65	0.64-0.60	0.59-0.55	0.54-0.50
		Maximum Operating Pressure PMO (psig) & Maximum Differential Pressure ΔPMX (psi)										
SS1VA-R	10	150	150	150	150	148	127	105	83	61	40	18
SS1VA-M	10	150	150	144	128	111	95	79	62	46	30	14
	21	300	300	300	300	290	247	205	162	120	78	35

No.	Description	Material	ASTM/AISI*	JIS
①	Body	Cast Stainless Steel	A351 Gr.CF8	—
②	Cover	Cast Stainless Steel	A351 Gr.CF8	—
③	Float	Stainless Steel	AISI316L	SUS316L
④	Orifice	SS1VA-R	NBR**/Stainless Steel	D2000BF/AISI303
	Orifice	SS1VA-M	—	—
⑤	Orifice Gasket	Fluorine Resin	PTFE	PTFE
⑥	Screen	Stainless Steel	AISI304	SUS304
⑦	Cover Gasket	Fluorine Resin	PTFE	PTFE
⑧	Cover Bolt	Stainless Steel	AISI304	SUS304
⑨	Nameplate	Stainless Steel	AISI304	SUS304
⑩	Screw	Stainless Steel	AISI304	SUS304
⑪	Spring Washer	Stainless Steel	AISI304	SUS304
⑫	Connector	Stainless Steel	AISI304	SUS304


* Equivalent ** Nitrile Rubber



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted. DO NOT use for toxic, flammable or otherwise hazardous fluids.




Rubber Orifice



Metal Orifice

Dimensions

● **SS1VA** Screwed

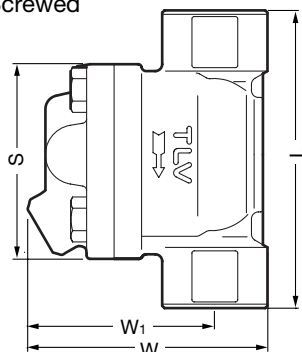

NOTE
Install the shortest possible vertical condensate pipe to the trap to ensure unobstructed condensate flow.

SS1VA Screwed* (in)

Size	L	W	W ₁	S	Weight (lb)
1	5 1/8	4 1/16	3 3/16	3 1/4	4.0


* NPT, other standards available

Leakage Rating

ANSI/FCI Leakage Rating Equivalent

Model	Orifice	Minimum Δ P (psi)	
		0.1	1.5
SS1VA	Rubber	Class 4	Class 6
	Metal	Class 3	

Discharge Capacity

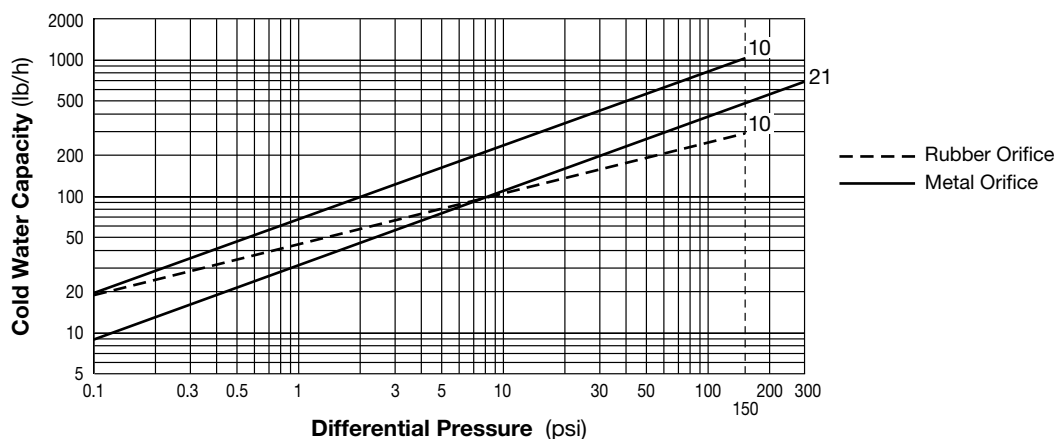

1. Line numbers within the graph refer to orifice numbers.
2. Differential pressure is the difference between the inlet and outlet pressure of the trap.
3. The chart is applicable to condensate below 212 °F.
4. The discharge capacity is for a liquid with specific gravity of 1.
5. Recommended safety factor: at least 1.5.

CAUTION DO NOT use traps under conditions that exceed maximum differential pressure, as condensate backup will occur!

Capacity Conversion Factors

Specific Gravity (S.G.)	0.95	0.9	0.85	0.8	0.75	0.7	0.65	0.6	0.55	0.5
Conversion Factor	1.03	1.06	1.08	1.12	1.16	1.19	1.24	1.29	1.35	1.41

Before using the capacity chart multiply the required capacity (including safety factor) by the appropriate conversion factor for the specific gravity of the liquid. Choose from the table above or use the following formula: Conversion factor = $\frac{1}{\sqrt{S.G.}}$

CAUTION DO NOT DISASSEMBLE OR REMOVE THIS PRODUCT WHILE IT IS UNDER PRESSURE. Allow internal pressure of this product to equal atmospheric pressure and its surface to cool to room temperature before disassembling or removing. Failure to do so could cause burns or other injury. READ INSTRUCTION MANUAL CAREFULLY

TLV CORPORATION

13901 South Lakes Drive, Charlotte, NC 28273-6790
 Phone: 704-597-9070 Fax: 704-583-1610
 E-mail: tlv@tlvengineering.com
 For Technical Service 1-800 "TLV TRAP"



Manufacturer
TLV CO., LTD.
 Kakogawa, Japan
 is approved by LRQA Ltd. to ISO 9001/14001

ISO 9001/ISO 14001

