

DESCRIPTION:


The IS-IP4DVF is an IS Series IP video door station with 4 call buttons for selective calling. The RY-IP44 adaptor is required for assigning the call buttons to specific IS-IPMV master stations within the IS-IP configuration.

The IS-IP4DVF will connect to a network switch, and the call buttons will connect to the RY-IP44 adaptor inputs.

This unit has a stainless steel faceplate, plastic call buttons with placards, and a directory strip. The IS-IP4DVF comes with a back box for flush mounting. For surface mount applications, use model SBX-ISDVFP (sold separately).

FEATURES:

- IP video door station
- 4 call buttons for selective calling to IS-IPMV master stations (RY-IP44 adaptor required)
- Call status indicator
- Stainless steel faceplate with tamper resistant screws

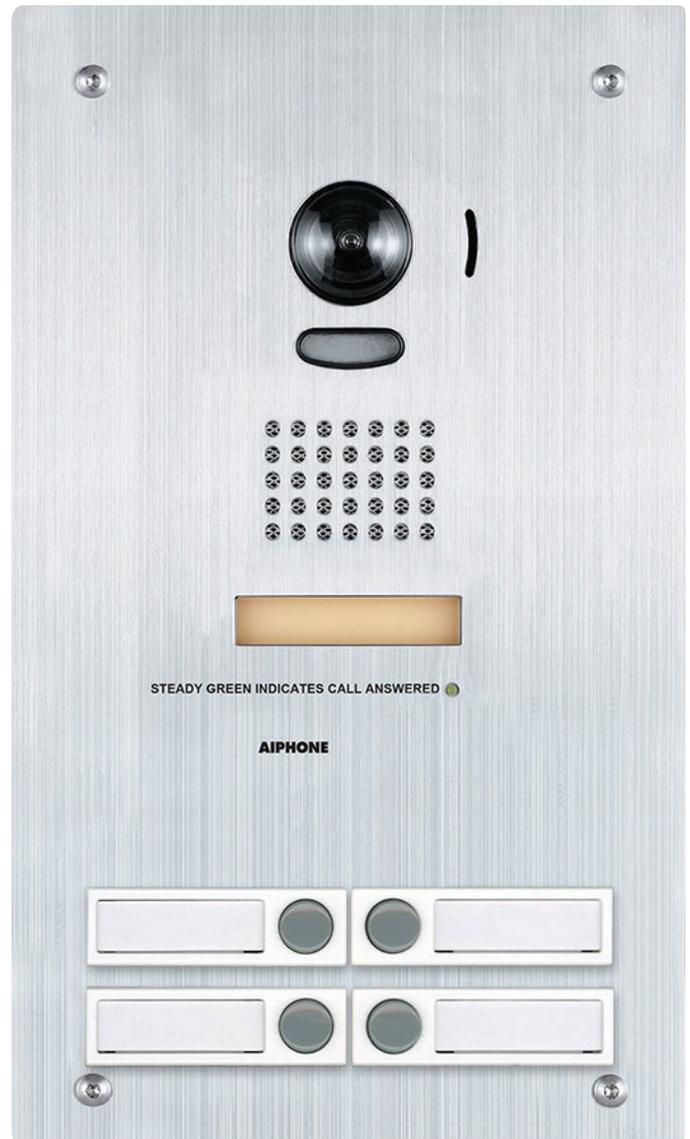

IS-IP4DVF

IP Video Door Station with 4 Call Buttons

FEATURE CALL-OUT DEFINITIONS:

- [1] Camera
- [2] Microphone
- [3] LED illuminator
- [4] Speaker
- [5] Directory card
- [6] Call status indicator
- [7] Call buttons with name placards

SPECIFICATIONS:

- | | |
|--------------------|-------------------------------------|
| Power Source: | PoE or 24V DC |
| Communication: | Open voice hands-free |
| Camera: | 1/4" color CMOS |
| Min. illumination: | 5 Lux at 1'6" |
| Wiring: | CAT-5e or CAT-6 |
| Door release: | 24V AC/DC, 500mA
(N/O, COM, N/C) |
| Operating Temp: | 14° ~ 140°F (-10° ~ 60°C) |
| Dimensions: | 12-3/8" H x 7" W x 1-7/8" D |

FEATURE CALL-OUTS:

