



PC2

Single Point, Stainless Steel, Hermetically Sealed, IP69K

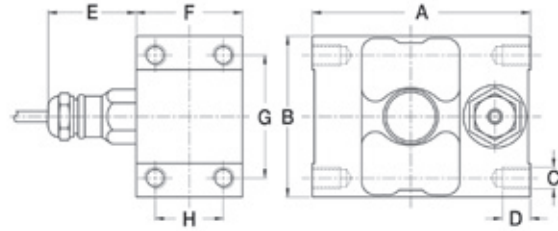

Specifications

Full Scale Output: 2.0 mV/V	Safe Overload: 200% full scale	Temperature : Operating range -40° F to 150° F (-40° C to 65° C)	Cable Color Code: Green+ Excitation Black.....- Excitation White+ Signal Red- Signal Blue+ Sense Brown- Sense Yellow Shield
Output Resistance: 960 (± 50) ohms	Safe Sideload: 100% full scale	Cable Length: 10 ft (3.1 m)	Warranty: One-year limited warranty
Input Resistance: 1,100 (± 50) ohms	Rated Excitation: 5-10 VDC (15 V maximum)	Cable Diameter: 0.196 polyurethane jacket	Approvals: 
Material/Finish: Stainless steel	Insulation Resistance: 5,000 megohms		
Seal Type: Hermetically sealed, IP69K	Combined Error: 0.02% full scale		

Dimensions

RATED CAPACITY	A	B	C	D	E	F	G	H
kg/mm								
150	101.6	75.00	M10	13.00	41.00	49.5	57.2	31.8
lb/in								
330.8	4.00	2.95	M10	0.51	1.61	1.95	2.25	1.25

Order Information

LOAD RATING		PART #	EST. SHIPPING WEIGHT	PRICE
500 kg	(330.7 lb)	41176	2 lb	\$1,010.00

