

A high utility item combining elegant design with ease of use.

## X(per) P(rofessional) Series

# XP100

- TFT LCD , anti-glare colour display
- Capacitive touch screen
- Sampling rate 1s
- Data recording
- Graphical analysis including standard deviation
- Integrated flash memory with space for up to 200 data blocks, or up to three hours continuous recording
- USB port for data transfer to Smartgraph 3 (included in delivery)
- Multilingual interface
- Online firmware update




# Hand-held measuring device XP100 for measuring temperature (-200...+800°C)



High-precision hand-held device for PT100 temperature sensors. Suitable for measuring tasks requiring a high degree of precision. Mini USB port with software and online data collection. 25 languages available, accuracy is 0.01°C across the full measuring range. Solely for use with PT100 sensors.

Hand-held device XP100		Order No.
<b>Very exact temperature measuring device (±0.01°C). Ideal as a reference device and for comparison measurements in service or as part of ISO9000 tasks. We recommend a DAkkS calibration certificate for traceability to international standards.</b>		5810.00
<b>Technical data</b>	Dimensions	170x62x34 mm
	Weight	Approx. 205g
<b>Storage conditions</b>	Permitted ambient temperature	-20...60°C
	Permitted rel. humidity	<90% RH non-condensing
<b>Operating conditions</b>	Permitted rel. humidity	<90% RH non-condensing
<b>Power supply</b>	Power supply	4 Alkaline LR6 AA 1.5V / USB 5V
	Active power consumption	Approx. 400mW
	Battery life passive	Approx. 1 year
	Battery life active	Min. 24 hours
<b>Data storage</b>	Integrated data storage	Up to 200 data/approx. 1 Mio measured values
<b>Interface</b>	USB	Cable and SmartGraph3 software included in delivery
<b>Resolution</b>	Definition of measured values	3 decimal places
<b>Display</b>	Control	Touch screen, capacitive
	Technology	TFT, resolution 240x320, 65k colours, very good contrast, suitable for sunlight
	Surface, toughened glass	Degree of hardness: 7, scratch-resistant
<b>Accessories</b>	Extension and/or connecting cable for digital sensor, 2m	8120.KAB2
	Extension and/or connecting cable for digital sensor, 10m	8120.KAB10
	Power supply adapter	8120.NT
	Connector for third-party sensors	3120.50

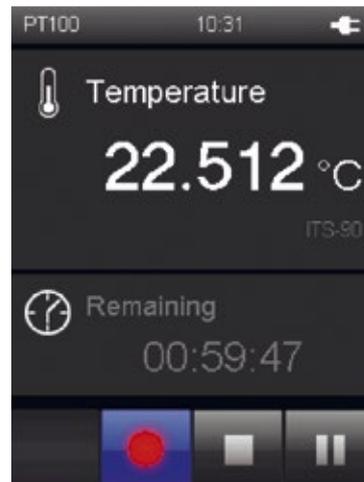

Measurement recording



Selection measuring menu

Compatible sensors for XP100		Page
<b>Temperature</b>	PT100 surface probe	23
	PT100 probe/ immersion probe (long)	22
	PT100 food probe, stainless steel	22
	Immersion probe 300x4mm	22

