

Standard Features

- Epson® EU-T482 direct thermal tape printer
- Slide door access to ticket
- 8 in paper roll (PN 105446)

Printer Kiosk with Intercom

- Intercom substation AI phone

Printer Kiosk with Ethernet Intercom

- Intercom substation AI phone Ethernet TCP/IP

Specifications

Line Voltages:

115 or 230 VAC

Frequency:

50 or 60 Hz

Power Consumption:

0.5 amps (depending on options)

Fusing:

3.15 amps circuit breaker

Humidity:

0-95% relative humidity

Rating/Material:

NEMA1

IP10

Printer Serial Ports:

RS-232

Ethernet (optional)

Storage Temperature:

14 to 158° F (-10 to 70° C)

Current Supported Riser Plates:

Zebra® 140XIIIPlus

Zebra 105SL

Zebra R110Xi

Zebra Z4Mplus

Zebra 2746e

Datamax-O'Neil® I-4208

Datamax-O'Neil 4206

Datamax-O'Neil I-4308

Datamax-O'Neil I-4210

Datamax-O'Neil I-4212

Intermec® 3400e

Intermec 4440

Warranty:


Two-year limited warranty




PN 112836



PN 120028

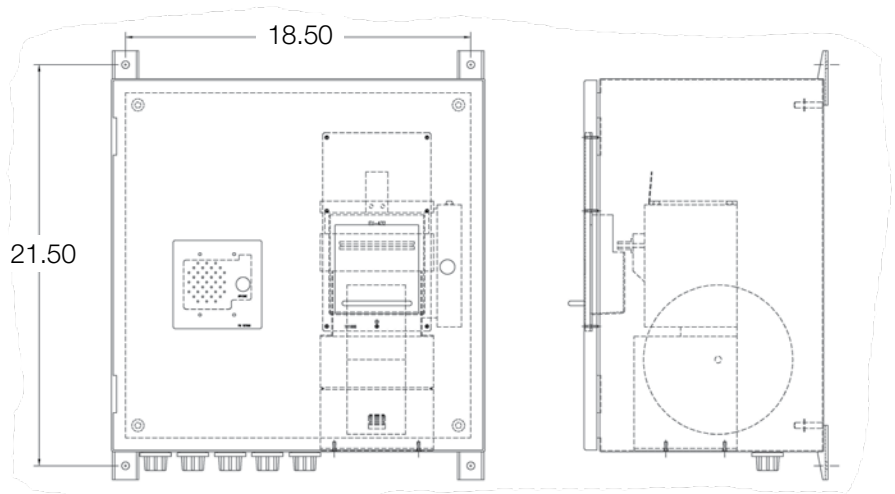

Printer Kiosk with Intercom

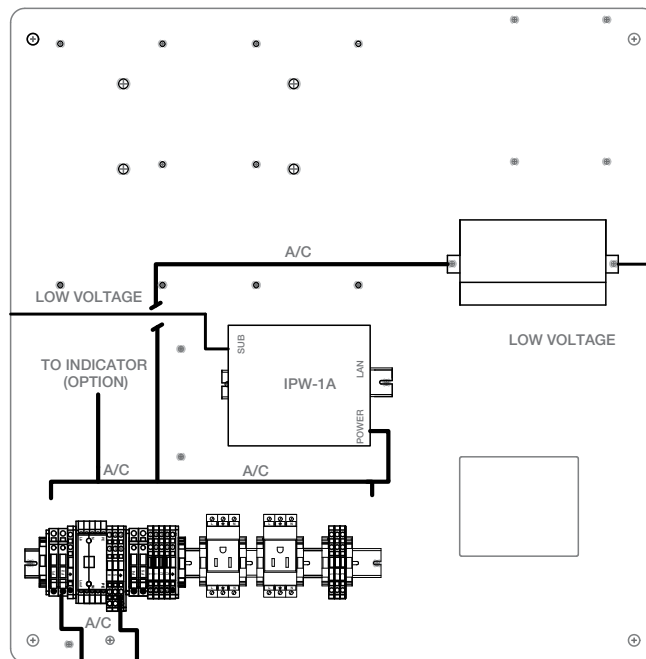

Printer Kiosk with Ethernet Intercom