

TLV

PowerTrap®

MODEL GT14M

COMBINATION PUMPING AND TRAPPING SECONDARY PRESSURE DRAINER

Benefits

Pump/Trap with built-in steam trap for a wide range of applications: drainage of medium capacity heat exchangers, flash steam recovery systems and reservoirs, often operating under vacuum conditions.

1. No cavitation or seal leakage.
2. Non-electric design with durable nickel-based alloy compression spring for reliable performance.
3. Pump will operate with a low filling head (min. 14").
4. Easy, inline access to internal parts simplifies cleaning and reduces maintenance costs.
5. Intake/exhaust valve heads are both Rockwell 65C with 45C seats for maximum durability.
6. High-quality stainless steel internals ensure reliability.
7. Compact design permits installation in a limited space.
8. Float resists hydraulic shock to 1500 psig.
9. 2-year Limited Warranty for snap-action mechanism.*

* Contact TLV for details



Specifications

Model		GT14M
Connection	Pumped Medium Inlet & Outlet	Flanged*
	Motive Medium & Pump Exhaust	Screwed
Size (in)	Pumped Medium: Inlet x Outlet	1½ x 1½
	Motive Medium Inlet	½
	Pump Exhaust Outlet	½
Maximum Operating Pressure (psig)	PMO	200
Maximum Operating Temperature (°F)	TMO	428
Maximum Allowable Pressure (psig)	PMA	Cast Iron: 230 Cast Steel: 300
Maximum Allowable Temperature (°F)	TMA	Cast Iron: 428 Cast Steel: 500
Motive Medium Pressure Range (psig)		5 – 200
Maximum Allowable Back Pressure		7 psi less than motive medium pressure used
Volume of Each Discharge Cycle (gal)		Approx. 3.3
Motive Medium**		Saturated Steam
Pumped Medium***		Steam Condensate

* Flange connection, see picture at bottom right

Connections and sizes in bold are standard


*** Do not use for fluids with specific gravities under 0.85 or over 1, or for toxic, flammable or otherwise hazardous fluids.



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.


No.	Description	Material	ASTM/AISI*	JIS
①	Body	Cast Iron	A126 Cl.B	FC250
		Cast Steel**	A216 Gr.WCB	—
②	Cover	Cast Iron	A126 Cl.B	FC250
		Cast Steel**	A216 Gr.WCB	—
③	Cover Gasket	Graphite Compound	—	—
④	Float	Stainless Steel	AISI316L	SUS316L
⑤	Snap-action Unit	Stainless Steel	—	—
⑥	Intake Valve	Stainless Steel	AISI440C	SUS440C
	Intake Valve Unit	Valve Seat	Stainless Steel	AISI420F
⑦	Exhaust Valve	Stainless Steel	AISI440C	SUS440C
	Exhaust Valve Unit	Valve Seat	Stainless Steel	AISI420F
⑧	Steam Trap Unit	Stainless Steel	—	—
⑨	Inlet Check Valve CKF5M	Stainless Steel	AISI304	SUS304
⑩	Outlet Check Valve CKF3M	Cast Stainless Steel	A351 Gr.CF8	—

* Equivalent ** Option: Cast Stainless Steel

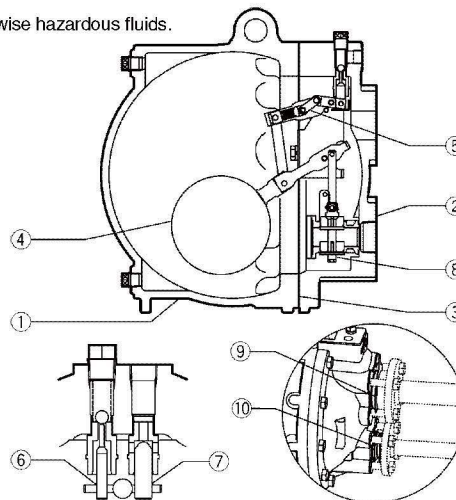

Copyright © TLV

Dimensions

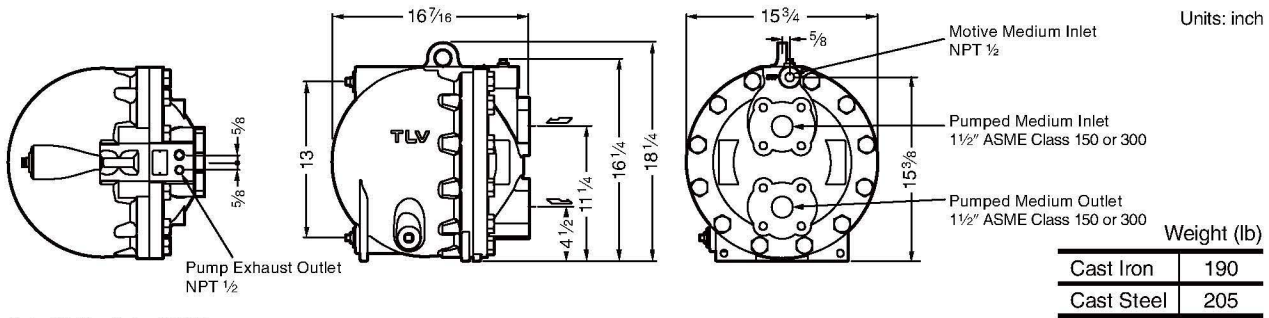

Note: All Plug Holes NPT 1/2

Discharge Capacity

Filling Head 25" from Grade


Inlet Pipe Size		1 1/2"	
Inlet Check Valve		1 1/2" CKF5M	
Outlet Check Valve		1 1/2" CKF3M	
Motive Medium		Steam	
Motive Medium Inlet Pressure (Pm) (psig)	Total Lift or Back Press. (P2) psig	lb/h	
200	25	6080	
	40	4980	
	60	3990	
	80	3080	
	100	2310	
	150	1320	
175	25	5570	
	40	4290	
	60	3410	
	80	2530	
	100	1870	
	150	990	
150	15	5510	
	25	4730	
	40	3740	
	60	2930	
	80	2200	
	100	1560	
125	15	4950	
	25	4350	
	40	3280	
	60	2540	
	80	1810	
	100	1250	
100	15	4530	
	25	3740	
	40	2730	
	60	1870	
	80	1340	
	75	15	3840
25		2990	
40		2240	
60		1360	
50		10	4240
		15	3280
	25	2410	
	40	1560	
	25	5	3960
		10	3260
15		2430	
2		3950	

• **Correction Factor**

For GT14M installed with filling head other than 25" (minimum filling head: 14")

Filling Head from Grade	Inlet Pipe & Check Valve Size
	1 1/2" CKF5M
55"	1.11
43"	1.08
37"	1.07
31"	1.05
25"	1.00
22"	0.95
18"	0.81
14"	0.60

• **Illustration of Filling Head and Pressures**

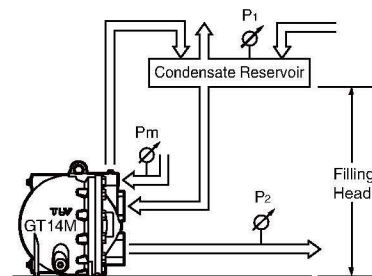

The discharge capacity is determined by the motive medium, motive medium pressure (Pm) and back pressure (P2).

Make sure that:
 Discharge Capacity × Correction Factor > Required Flow Rate

NOTE:

- A check valve must be installed at both the pumped medium inlet and outlet. To achieve the above capacities with the standard GT14M configuration, TLV check valves CKF5M for inlet and CKF3M for outlet must be used.
- Motive steam pressure minus back pressure must be greater than 7 psi.
- A strainer must be installed at the motive medium and pumped medium inlets.

Size of Reservoir


The reservoir must have a capacity sufficient to store the condensate produced during the **PowerTrap** operation and discharge.

Reservoir Dimensions (flash steam is not involved)


Amount of Condensate (lb/h)	Reservoir Diameter (in) and Length (ft)						
	1 ½	2	3	4	6	8	10
500 or less	3.0 ft	2.0					
700	4.0	2.5	1.0				
1,000	5.5	3.5	1.5				
1,200		4.5	2.0	1.0			
1,500			2.5	1.5			
2,000			3.5	2.0			
3,000			4.5	3.0			
4,000			6.5	4.0	1.5		
5,000				5.0	2.5		
6,000				5.5	2.5	1.5	
7,000				6.5	3.0	1.5	
8,000					3.5	2.0	
9,000					4.0	2.5	1.5
10,000					4.5	2.5	1.5
12,000					5.0	3.0	2.0
14,000					6.0	3.5	2.5
16,000					6.5	4.0	2.5
18,000						4.5	3.0
20,000						5.0	3.5

Reservoir length can be reduced by 50% when the motive pressure (P_m) divided by back pressure (P₂) equals 2 or greater (when P_m ÷ P₂ ≥ 2).

Steam Consumption (Motive Medium)

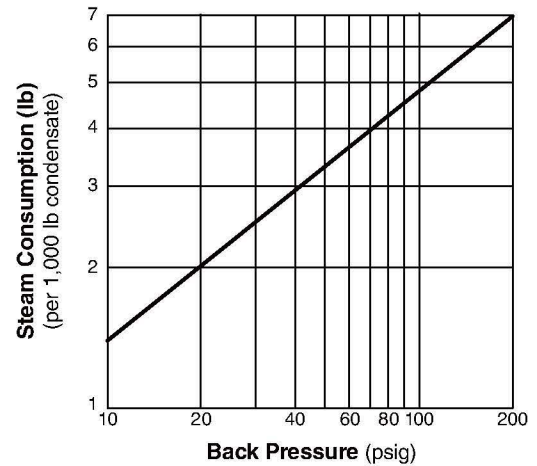

GT14M Steam Trap Discharge Capacity

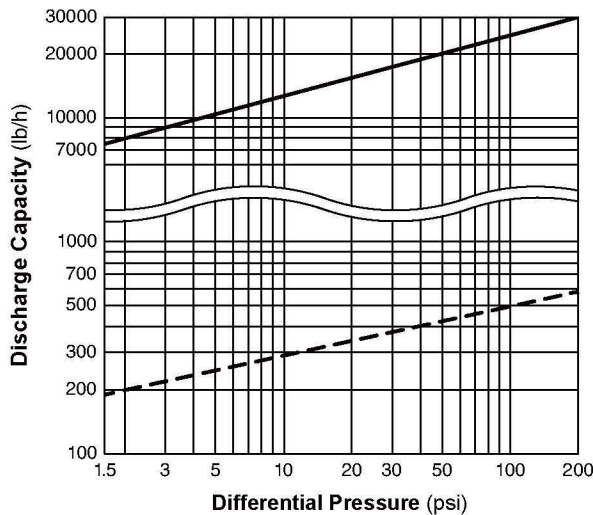

- : Capacity of GT14M as a steam trap (P₁ > P₂). Instantaneous condensate loads above the rated trap capacity will cause the pump to cycle and therefore reduce the discharge capacity.
- - - : Minimum amount of condensate required to prevent steam leakage.

1. Capacities are based on continuous discharge of condensate 11 °F below steam temperature.
2. Differential pressure is the difference between inlet and outlet pressure of the trap.



DO NOT use this product under conditions that exceed maximum differential pressure, as condensate backup will occur!

Memo:



DO NOT DISASSEMBLE OR REMOVE THIS PRODUCT WHILE IT IS UNDER PRESSURE.
Allow internal pressure of this product to equal atmospheric pressure and its surface to cool to room temperature before disassembling or removing. Failure to do so could cause burns or other injury. READ INSTRUCTION MANUAL CAREFULLY.

TLV CORPORATION

13901 South Lakes Drive, Charlotte, NC 28273-6790

Phone: 704-597-9070 Fax: 704-583-1610

E-mail: tlv@tlvengineering.com

For Technical Service 1-800 "TLV TRAP"



Manufacturer

TLV CO., LTD.
Kakogawa, Japan

is approved by LRQA Ltd. to ISO 9001/14001

ISO 9001/ISO 14001

