


S030 and S020 flow fittings







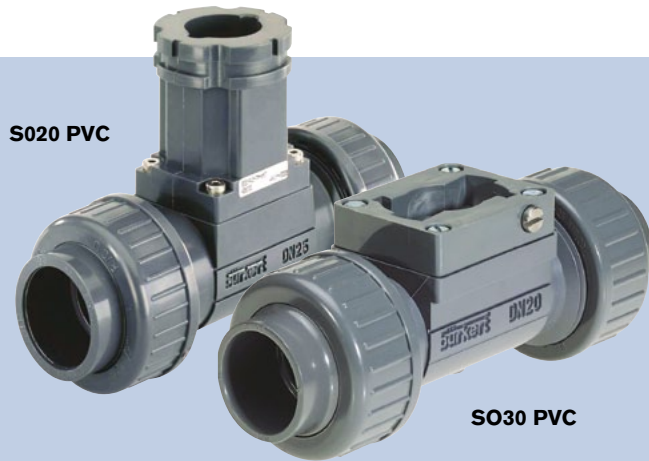

1/2" to 14", 0-232 PSI

- Straight thru tube assures maximum accuracy
- Wide range of materials and connections
- Unique INLINE version isolates medium from measuring device


Ordering Chart

S030 (for SE30, SE32, SE36)

Connection	PVC (ASTM)	Brass NPT	Stainless NPT	PVDF	SS Hygienic Clamp	SS OD Tube	ANSI B16-5
1/2"							
1/2"	423 950	423 986	424 010	423 968	-	-	424 046
3/4"	423 951	423 987	424 011	423 969	443 395	443 369	424 047
1"	423 952	423 988	424 012	423 970	443 396	443 370	424 048
1 1/4"	423 953	423 989	424 013	423 971	-	-	424 049
1 1/2"	423 954	423 990	424 014	423 972	443 397	443 372	424 050
2"	423 955	423 991	424 015	423 973	443 398	443 373	424 051
2 1/2"	-	-	-	-	443 399	443 374	-

Ordering Chart

S020 (for 8026, 8041, 8045) - Short sensor ■ **Long sensor** ■

Connection	PVC (ASTM)	Brass NPT	Stainless NPT	SS weldolet	Steel saddle	Steel weldolet	PVC saddle
1/2"							
1/2"	428 682	428 718	428 742				
3/4"	428 683	428 719	428 743				
1"	428 684	428 720	428 744				
1 1/4"	428 685	428 721	428 745				
1 1/2"	428 686	428 722	428 746				
2"	428 687	428 723	428 747	418 111	98146031	98146032	
2 1/2"				418 112		98146034	413 469
3"				418 113	98146024	98146035	413 470
4"				418 114	98146025	98146020	98146019
5"				418 115			
6"				418 116	98146026	98146021	98146017
8"				418 117	98146027	98146022	98146030
10"				418 756	98146028	98146023	
12"				420 070	98146029	98146036	
14"				416 637	98109612		