



PowerTrap[®]

MODEL GT10L

COMBINATION PUMPING AND TRAPPING SECONDARY PRESSURE DRAINER

Benefits

Pump/trap with built-in steam trap for a wide range of applications: drainage of low capacity heat exchangers, flash steam recovery systems and reservoirs, often operating under vacuum conditions.

1. No cavitation or seal leakage.
2. Non-electric design with durable nickel-based alloy compression spring for reliable performance.
3. Pump will operate with a low filling head (min. 12").
4. Easy, inline access to internal parts simplifies cleaning and reduces maintenance costs.
5. Intake/exhaust valve heads are both Rockwell 65C with 45C seats for maximum durability.
6. High quality stainless steel internals ensure reliability.
7. Compact design permits installation in a limited space.
8. Float resists hydraulic shock to 1500 psig.
9. 2-year warranty for snap-action mechanism.*

* Contact TLV for details



Specifications

Model		GT10L	
Connection	Pumped Medium Inlet & Outlet	Screwed and Flanged*	Screwed
	Motive Medium & Pump Exhaust	Screwed	
Size (in)	Pumped Medium: Inlet x Outlet	1 x 1	1½ x 1
	Motive Medium Inlet	½	
	Pump Exhaust Outlet	½	
Maximum Operating Pressure (psig)	PMO	150	
Maximum Operating Temperature (°F)	TMO	365	
Maximum Allowable Pressure (psig)	PMA	Cast Iron: 230 Cast Steel: 300	
Maximum Allowable Temperature (°F)	TMA	428	
Motive Medium Pressure Range (psig)		5 – 150	
Maximum Allowable Back Pressure		7 psi less than motive medium pressure used	
Volume of Each Discharge Cycle (gal)		approximately 1.6	
Motive Medium**		Saturated Steam	
Pumped Medium***		Steam Condensate	

* For details of flange connection, see picture at bottom right

** Do not use with toxic, flammable or otherwise hazardous fluids.

*** Do not use for fluids with specific gravities under 0.85 or over 1, or for toxic, flammable or otherwise hazardous fluids.




To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	ASTM/AISI*	JIS	
①	Body	Cast Iron	A126 Cl.B	FC250	
		Cast Steel**	A216 Gr.WCB	—	
②	Cover	Cast Iron	A126 Cl.B	FC250	
		Cast Steel**	A216 Gr.WCB	—	
③	Cover Gasket	Graphite Compound	—	—	
④	Float	Stainless Steel	AISI316L	SUS316L	
⑤	Snap-action Unit	Stainless Steel	—	—	
⑥	Motive Medium Intake Valve Unit	Intake Valve	Stainless Steel	AISI440C	SUS440C
		Valve Seat	Stainless Steel	AISI420F	SUS420F
⑦	Exhaust Valve Unit	Exhaust Valve	Stainless Steel	AISI440C	SUS440C
		Valve Seat	Stainless Steel	AISI420F	SUS420F
⑧	Trap Unit	Stainless Steel	—	—	
⑨	Inlet Check Valve	Screwed	CK3MG***	Cast Stainless Steel	A351 Gr.CF8
		Flanged	CKF5M	Stainless Steel	AISI304
⑩	Outlet Check Valve	Screwed	CK3MG***	Cast Stainless Steel	A351 Gr.CF8
		Flanged	CKF3M	Cast Stainless Steel	A351 Gr.CF8

* Equivalent ** Option: Cast Stainless Steel *** Not shown

Connections and sizes in bold are standard

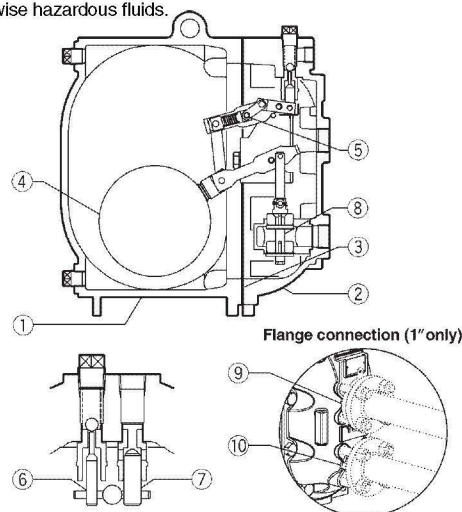

Copyright © TLV

Discharge Capacity

Filling Head: 25" from Grade


Inlet Pipe Size		A	1½"	B	1"	C	1"	
Inlet Check Valve			1½" CK3MG		1" CK3MG		1" CKF5M	
Outlet Check Valve			1" CK3MG		1" CK3MG		1" CKF3M	
Motive Medium			Steam		Steam		Steam	
Motive Medium Inlet Pressure (P _m) (psig)	Total Lift or Back Press. (P ₂) (psig)		lb/h		lb/h		lb/h	
150	15		3,080		2,310		2,160	
	25		2,850		2,110		1,890	
	40		2,520		1,860		1,740	
	60		2,160		1,560		1,300	
	80		1,820		1,290		1,050	
	100		1,520		1,120		810	
125	15		2,890		2,260		2,090	
	25		2,670		2,010		1,800	
	40		2,360		1,740		1,650	
	60		2,010		1,440		1,150	
	80		1,700		1,180		920	
	100		1,360		1,030		690	
100	15		2,740		2,160		2,020	
	25		2,480		1,930		1,690	
	40		2,070		1,610		1,530	
	60		1,640		1,270		1,000	
	80		1,230		1,030		750	
	75	15		2,600		2,090		1,870
25			2,320		1,750		1,540	
40			1,870		1,450		1,270	
60			1,360		1,110		840	
50		10		2,620		2,110		1,830
		15		2,520		1,930		1,650
	25		1,970		1,610		1,300	
	40		1,390		1,190		980	
	25	5		2,670		2,080		1,980
		10		2,360		1,850		1,620
15			2,060		1,600		1,340	
10	2		2,620		2,030		1,890	

• Correction Factors

For GT10L installed with filling head other than 25" (minimum filling head: CK3MG: 18", CKF5M: 12")

Filling Head from Grade	Inlet Pipe & Check Valve Size		
	1½" CK3MG	1" CK3MG	1" CKF5M
55"	1.30	1.50	1.37
43"	1.27	1.35	1.28
37"	1.23	1.25	1.21
31"	1.15	1.15	1.12
25"	1.00	1.00	1.00
22"	0.90	0.85	0.93
18"	0.60	0.60	0.81
12"	—	—	0.59

• Illustration of Filling Head and Pressures

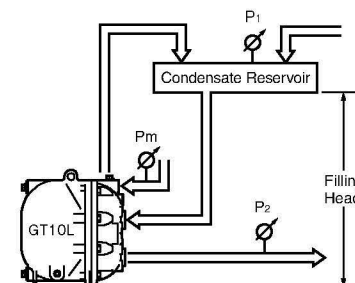


The discharge capacity is determined by the motive medium, motive medium pressure (P_m) and back pressure (P₂).

Make sure that:
 Discharge Capacity × Correction Factor > Required Flow Rate

NOTE:

- A check valve must be installed at both the pumped medium inlet and outlet. To achieve the above capacities with the standard GT10L configuration, either TLV check valves CK3MG (inlet & outlet), or CKF5M (inlet) and CKF3M (outlet) must be used, depending on connection type.
- Motive medium pressure minus back pressure must be greater than 7 psi.
- A strainer must be installed at the motive medium and pumped medium inlets.

Dimensions

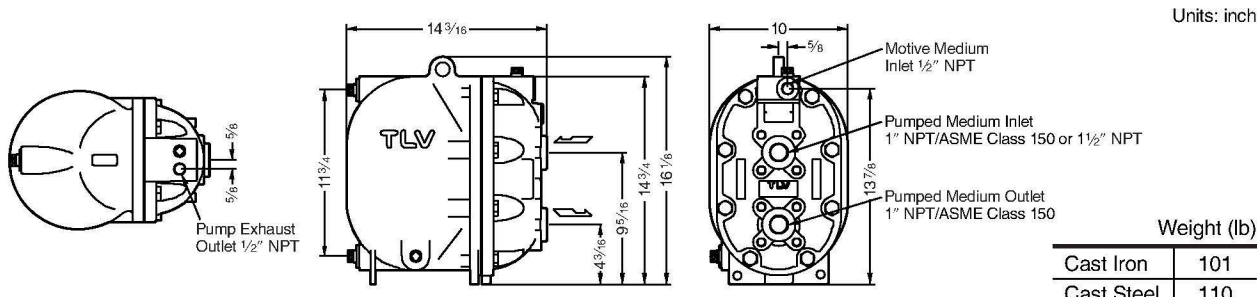

Note: All Plug Holes 1/2" NPT

Size of Reservoir


The reservoir must have a capacity sufficient to store the condensate produced during the **PowerTrap** operation and discharge.

Reservoir Dimensions (flash steam is not involved)


Amount of condensate lb/h	Reservoir diameter (in) and length (ft)						
	1 1/2	2	3	4	6	8	10
500 or less	3.0 ft	2.0					
700	4.0	2.5	1.0				
1000	5.5	3.5	1.5				
1200		4.5	2.0	1.0			
1500			2.5	1.5			
2000			3.5	2.0			
3000			4.5	3.0			
4000			6.5	4.0	1.5		
5000				5.0	2.5		
6000				5.5	2.5	1.5	
7000				6.5	3.0	1.5	
8000					3.5	2.0	
9000					4.0	2.5	1.5
10000					4.5	2.5	1.5
12000					5.0	3.0	2.0
14000					6.0	3.5	2.5
16000					6.5	4.0	2.5
18000						4.5	3.0
20000						5.0	3.5

Reservoir length can be reduced by 50% when the motive pressure (P_m) divided by the back pressure (P₂) equals 2 or greater (when P_m ÷ P₂ ≥ 2).

Steam Consumption (Motive Medium)

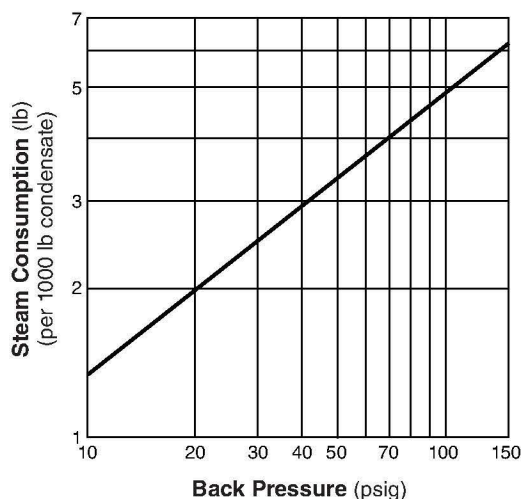

GT10L Steam Trap Discharge Capacity

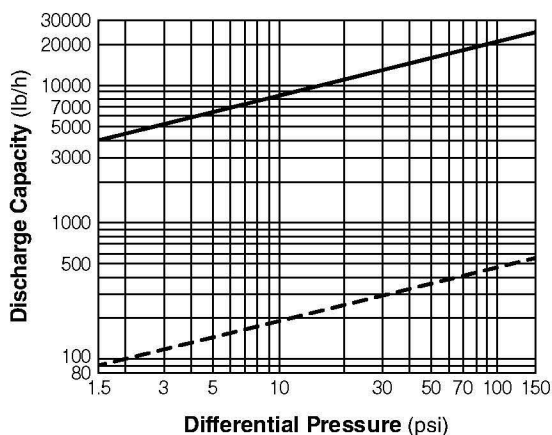

- : Capacity of GT10L as a steam trap (P₁ > P₂). Instantaneous condensate loads above the rated trap capacity will cause the pump to cycle and therefore reduce the discharge capacity.
- - - : Minimum amount of condensate required to prevent steam leakage.

- Capacities are based on continuous discharge of condensate 11 °F below steam temperature.
- Differential pressure is the difference between the inlet and outlet pressure of the trap.



DO NOT use this product under conditions that exceed maximum differential pressure, as condensate backup will occur!

System Package

Single System Package Type M1L


Discharge Capacity: see discharge capacity column **A** (no correction factor required)

Tank Size: 6.7 gal


Weight: approx. 288 lb (dry)

Other tank sizes and connections available


SIDE VIEW

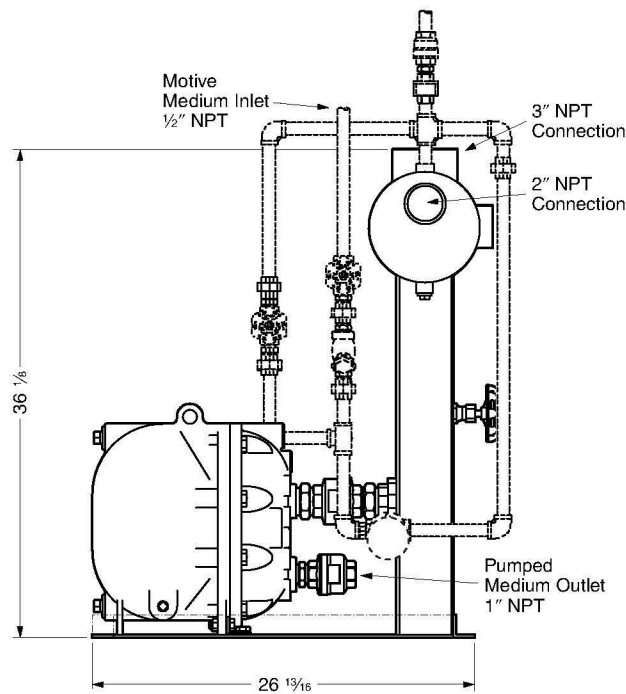

FRONT VIEW

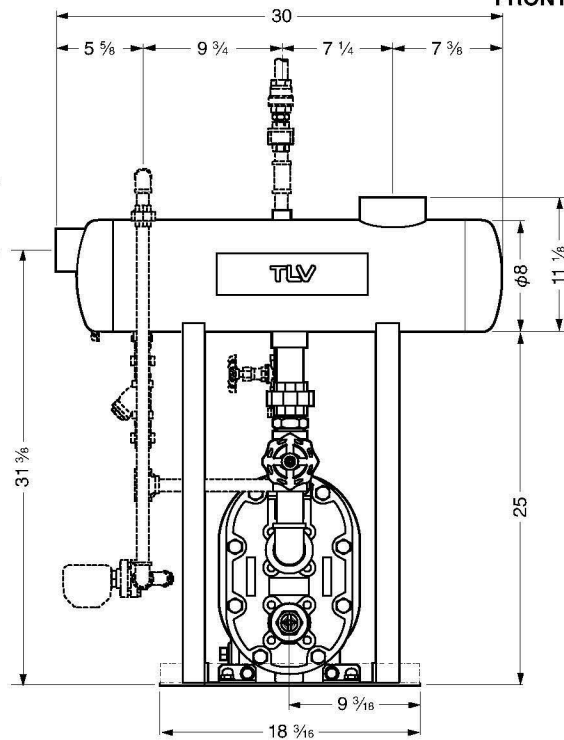

TOP VIEW

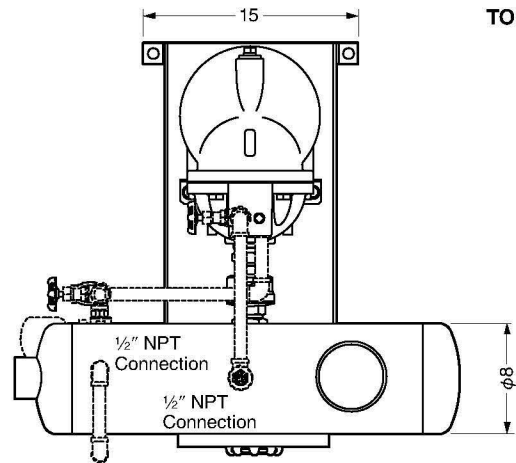

NOTE: Piping and valves indicated by dashed lines can be provided at an additional cost.

- Inlet: 1/2"
- Outlet: 1"
- Filling head: 25"
- Screwed connections: NPT
- Other standards available

Units: inch



DO NOT DISASSEMBLE OR REMOVE THIS PRODUCT WHILE IT IS UNDER PRESSURE.
 Allow internal pressure of this product to equal atmospheric pressure and its surface to cool to room temperature before disassembling or removing. Failure to do so could cause burns or other injury. READ INSTRUCTION MANUAL CAREFULLY.

TLV CORPORATION

13901 South Lakes Drive, Charlotte, NC 28273-6790
 Phone: 704-597-9070 Fax: 704-583-1610
 E-mail: tlv@tlvengineering.com
 For Technical Service 1-800 "TLV TRAP"



Manufacturer
TLV CO., LTD.
 Kakogawa, Japan
 is approved by LRQA Ltd. to ISO 9001/14001

ISO 9001/ISO 14001

