

SINGLE POINT

RLPWM15

Stainless Steel, NTEP Certified, 1:5000 Class III Single Cell, IP67

LOAD CELLS / WEIGH MODULES




Dimensions

Picture is a representation of actual product

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M	T
kg/mm														
10 - 150	35.00	13.00	40.00	13.00	13.00	35.00	75.00	150.00	19.00	100.00	19.00	6.2	25.00	1/4-20
lb/in														
22.1 - 330.7	1.37	0.51	1.57	0.51	0.51	1.37	2.95	5.90	0.74	3.93	0.74	0.24	0.98	1/4-20

Order Information

Load Rating	Part #	Est. Weight	Price
10 kg	119904	1 lb	\$295.00
15 kg	119912	1 lb	\$295.00
20 kg	119905	1 lb	\$295.00
30 kg	119906	1 lb	\$295.00
50 kg	119908	1 lb	\$295.00
75 kg	119909	1 lb	\$295.00
100 kg	119910	1 lb	\$295.00
150 kg	119911	1 lb	\$295.00

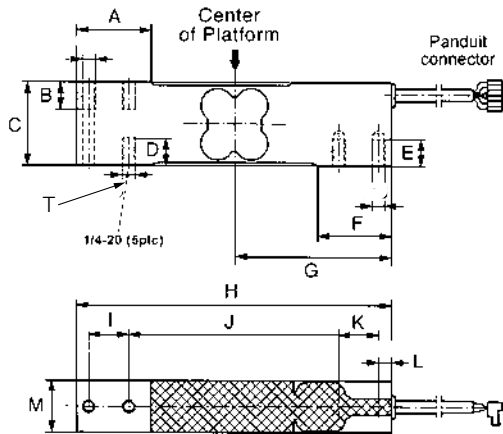

Interchangeable Products

HBM®
PW15
 VPG TEDEA-HUNTLEIGH®
1142

Specifications

- Full Scale Output:** 2.0 mV/V
- Bridge Resistance:** 350 ohms, nominal
- Material/Finish:** Stainless steel
- Temperature:** Compensated range 14°F to 104°F/-10°C to 40°C
Operating range -40°F to 150°F/-40°C to 65°C
- Safe Overload:** 150% full scale
- Rated Excitation:** 5-10 VDC (15 V maximum)
- Total Error:** 0.02% full scale
- Insulation Resistance:** 1,000 megohms
- Deflection:** 0.2 mm (0.007 in)
- Seal Type:** Environmentally sealed, IP67
- Cable Length:** 3.1 m (10 ft)
- Cable Diameter:** 0.190 PVC jacket
- Max Platform Size:** 15 x 15 in
- Cable Color Code:**
 - Blue+ Excitation
 - Black.....- Excitation
 - Green.....+ Sense
 - Gray.....- Sense
 - White.....+ Signal
 - Red.....- Signal

Warranty: Two-year limited warranty

Approvals:



www.ricelake.com | Phone: 800-472-6703

RICE LAKE