JB8SPT TuffSeal[®] Signal Trim Junction Box

Specifications:

Cable Fittings:

(9) 3/8 in NPT 0.157 in-0.314 in (2) 1/2 in NPT 0.272 in-0.472 in (1) PreVent breather unit

Enclosure:

Molded FRP, NEMA Type 4X enclosure with overlapping solid cover, stainless steel screws

Connectors:

Pluggable screw type, 12-28 AWG

Trimming:

Individual cell trim Potentiometers:

100K ohm, 25 turn cermet

Circuit Board: 5.7 in x 7.2 in with conformal coating


Warranty:

One-year warranty

Applications:

• Truck, livestock and railroad scales







Standard Features:

- Fiberglass Reinforced Polyester (FRP), NEMA Type 4X enclosure
- PreVent[™] breather vent
- Conformal coated circuit board
- Removable load cell connectors
- Section and individual cell trim capability
- Field replaceable transient protection
- (1) coupling, 1/2 in NPT cord grip to 3/4 in NPT conduit fitting for homerun cable
- Number of cells: 2, 4, 6 or 8 single load cells (even number only)
- Expansion board


Part Number/Price


cription	Price
PT signal trim junction box with transient protection	\$625.00
d only	\$365.00
sient board	\$215.00
sure only (does not include cord grip and filter)	\$135.00
i F S I S I S I	PT signal trim junction box with transient protection I only ient board

Note: Do not mix junction box models or use other brands of junction boxes with Rice Lake junction boxes. There is a risk of system instability.

Options/Accessories

_			
P	art#	Description	Price
9	2734	Coupling, 1/2 in NPT cord grip to 3/4 in NPT conduit fitting	\$25.00
9	2735	Coupling, 3/8 in NPT cord grip to 3/4 in NPT conduit fitting	\$25.00

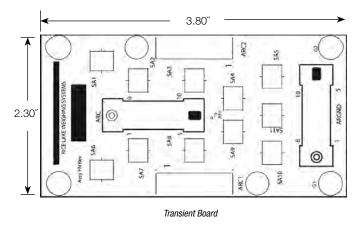

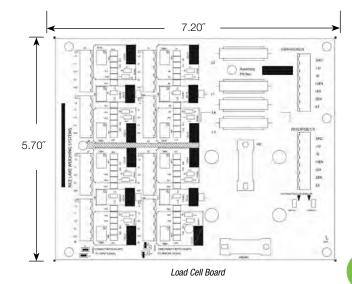

www.ricelake.com | Phone: 800-472-6703