

## Specifications

**Clamp Voltage:**

140V rms

**Peak Surge Current:**

6,500 amps

**Clamping Time:**

<5 nanoseconds

**Input Voltage:**

120 VAC

**Maximum Current:**

15 amps

**Maximum Power:**

1875 watts

**Noise Suppression:**

Frequency attenuation

50 KHz>20 db

150 KHz>40 db

1 MHz>80 db

>6 MHz>30 db



**Dimensions:**

(W x H x D) 2.37 x 4.15 x 2.31 in

(60.2 x 105.4 x 58.7 mm)

**Weight:**

Approximately 1 lb (0.45 kg)

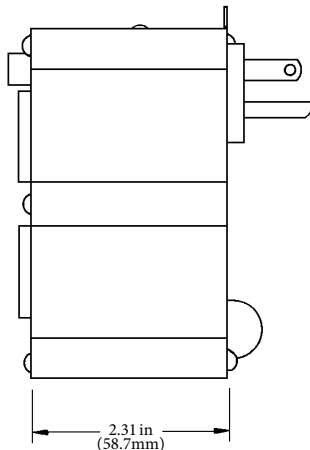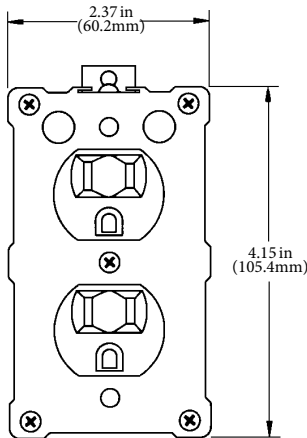

## Standard Features

- Two outlets, direct plug-in
- LED indicator for power on
- LED indicator for protection circuitry
- UL1449 listed at 330 volts
- Mounting clamp assures positive connection

## Part Number/Price

Part #	Description	Weight	Price
21145	ISOBLOK® AC two-outlet transient protector	1 lb	\$65.00