

Specifications

End Loading Capacity:

133% full scale at 30,000 lb

Warranty:

Weldment five years, load cells two years, all other components one-year limited warranty



Standard Features

- System includes two platforms with anchor brackets and four on/off ramps with anchor tabs (anchor bolts not included)
- Scale
- (W x L x H): 32 x 84 x 6 in
- Axle capacity - tandem platforms - 60,000 lb (two scales 30,000 lb each)
- Includes (2) 3/4-10NC eye bolts
- Contains four environmentally sealed, IP67 20,000 lb single-ended shear beam load cells per platform
- Treaded top plate with side access junction box
- JB4SS TuffSeal® signal trim junction box
- Top access foot adjustment holes
- Carbon steel captured ball feet
- 20 ft SURVIVOR® EL147HE cable
- Non-Legal for Trade
- Ramps
- (W x L x H) 32 x 60 x 6 in
- Treaded top plate

Part Number/Price


Part #	Description	Dimensions	Est. Weight	Price
107637	60,000 lb (30,000 lb each)	32 x 205.5 x 6 in	3,600 lb	\$11,915.00
RoughDeck AX Bundle Package				
153058	60,000 lb (30,000 lb each) includes 920i Universal 115 VAC with short axle program, 4 in LaserLight 2 with Stop/Go light, TM-U295 and RS-232 cable	32 x 205.5 x 6 in	3,700 lb	\$15,995.00

RoughDeck® AX

Axle Scale

TRUCK / RAIL / LIVESTOCK / AXLE SCALES

Dimensions			
A	84.0 in (213.36 cm)	E	6.0 in (15.24 cm)
B	32.0 in (81.28 cm)	F	1.0 in (2.54 cm)
C	205.5 in (521.97 cm)	G	0.75 in (1.91 cm)
D	38.75 in (98.42 cm)		

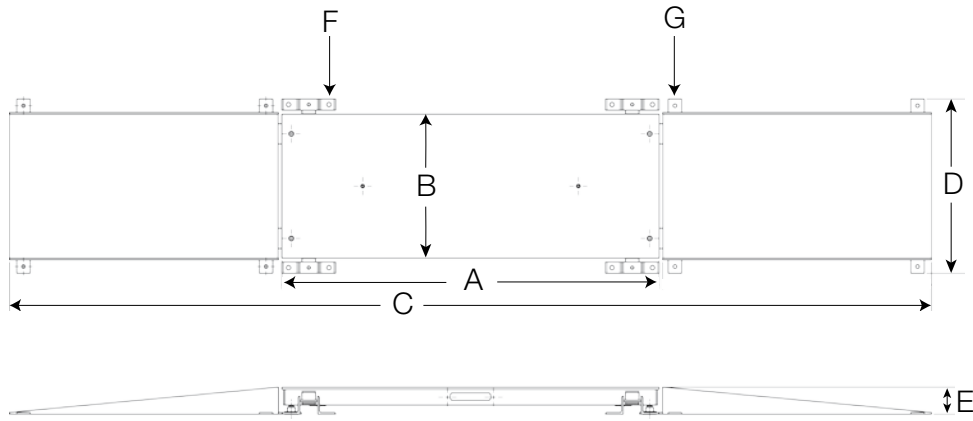

www.ricelake.com | Phone: 800-472-6703

RICE LAKE

982