


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

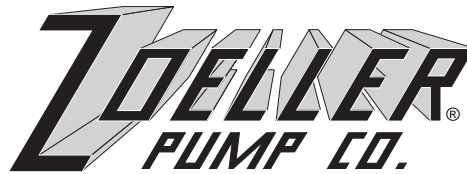

SECTION: 8.10.042

FM1214

0703

Supersedes

1093

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
<http://www.zoeller.com>

MODEL 98 FLOW MATE - AUTOMATIC ADVERTISING COPY

FEATURES

- ½ HP
- Automatic.
- Cast iron construction with powder coated epoxy finish.
- Stainless steel screws, guard, handle and switch arm.
- Float operated mechanical switch.
- Non-clogging Vortex Impeller.
- Passes ½" spherical solids.
- Thermal overload protected motor.
- UL listed 15' cord.
- 1½" discharge.
- Pumps 4,320 gallons per hour.
- UL and CSA Listed.

COPY

A rugged ½ HP cast iron pump for effluent or dewatering applications. 1½" discharge and capable of pumping 4,320 gallons per hour at 5' of Total Dynamic Head and passes ½" solids. A quality pump backed by years of proven reliability. UL and CSA listed.