


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

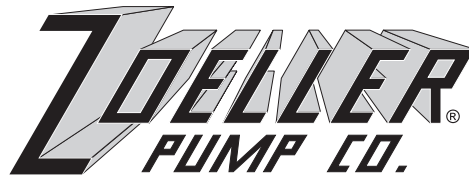

SECTION: 8.10.045

FM1215

0703

Supersedes

0602

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
<http://www.zoeller.com>

MODEL 137/139 FLOW MATE - AUTOMATIC ADVERTISING COPY

FEATURES

- ½ HP
- Automatic.
- Non-clogging Vortex Impeller.
- Passes 5/8" solids.
- UL listed 10' cord for automatic.
- 137 Cast Iron/139 Cast Bronze Construction.
- Thermal overload protected motor.
- 1½" discharge.
- Powder coated epoxy finish on "137".
- All stainless steel screws, bolts, guard and switch arm.
- Pumps 93 gpm at 5' TDH.
- UL and CSA listed.

COPY

A rugged high capacity ½ HP pump for effluent or dewatering applications. 1½" discharge and capable of pumping 93 gpm at 5' Total Dynamic Head. A quality pump backed by years of proven reliability. UL and CSA listed.