

Flat Cable Color Code

A	1 ● BLACK 2 ● RED 3 ● GREEN 4 ● YELLOW	B	1 ● WHITE 2 ● BLACK 3 ● RED 4 ● GREEN 5 ● YELLOW 6 ● BLUE
C	1 ● BLUE 2 ● ORANGE 3 ● BLACK 4 ● RED 5 ● GREEN 6 ● YELLOW 7 ● BROWN 8 ● WHITE	D	1 ● WHITE 2 ● BLUE 3 ● ORANGE 4 ● BLACK 5 ● RED 6 ● GREEN 7 ● YELLOW 8 ● BROWN 9 ● GREY 10 ● PURPLE


- 300-810SL** 10C Silver
- 300-840□□** 4C Black, Ivory, Silver
- 300-860□□** 6C Ivory, Silver
- 300-880SL** 8C Silver
- 301-840SL** 4C Silver UL
- 301-860SL** 6C Silver UL
- 301-880SL** 8C Silver UL



Bulk Flat Modular Cable

Flat Modular Cable – PVC Jacket
Suitable for Telephony, VoIP Telephony Applications
AWG28 7x36 (0.12mm) Stranded Conductors

- D 300-810SL** 1000' 10-Conductor Silver
- A 300-840BK** 1000' 4-Conductor Black
- A 300-840IV** 1000' 4-Conductor Ivory
- A 300-840SL** 1000' 4-Conductor Silver
- B 300-860IV** 1000' 6-Conductor Ivory
- B 300-860SL** 1000' 6-Conductor Silver
- C 300-880SL** 1000' 8-Conductor Silver
- A 301-840SL** 1000' 4-Conductor Silver UL
- B 301-860SL** 1000' 6-Conductor Silver UL
- C 301-880SL** 1000' 8-Conductor Silver UL

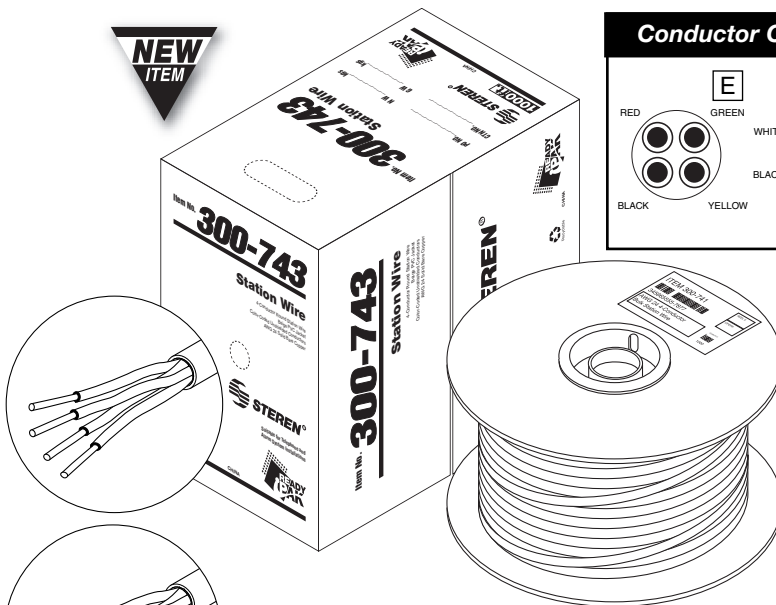

Conductor Color Code


E	RED GREEN BLACK YELLOW	F	RED GREEN WHITE BLUE BLACK YELLOW
----------	---------------------------	----------	---

- 300-741** 4C Beige Spool
- 300-743** 4C Beige Pull Box
- 300-761** 6C Beige Spool

Bulk Round Station Wire

Suitable for Remote Control, Signaling,
Security Systems, Communications,
Single-Line Telephone and Intercom/PA Systems
AWG24 Solid Bare Copper Conductors
4 or 6-Conductor – Non-Twisted Pair
Color-Coded, Unshielded – Beige PVC Jacket
1000' Lengths – Available in Spool or Pull Box

- NEW ▶ E 300-741** 1000' 4-Conductor – Beige
- NEW ▶ E 300-743** 1000' 4-Conductor Pull Box – Beige
- NEW ▶ F 300-761** 1000' 6-Conductor – Beige

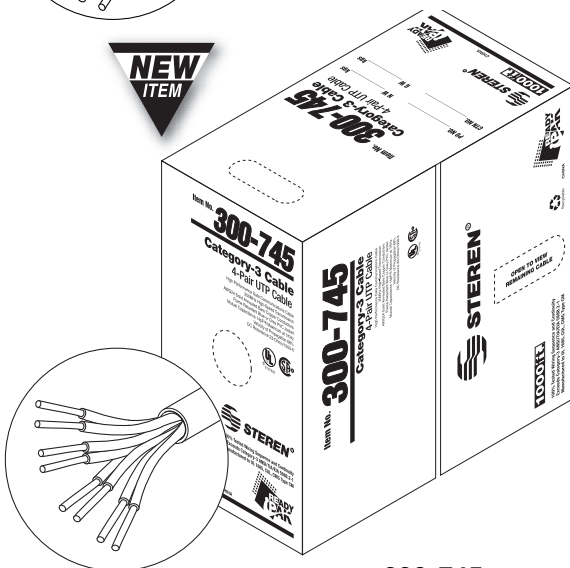

Conductor Color Code

WHITE/GREEN	WHITE/BLUE
WHITE/BROWN	WHITE/ORANGE

300-745 Grey

UTP Category-3 Bulk Cable

- NEW ▶ 300-745** 1000' 4-Pair Grey CAT3 Cable
Unshielded Twisted Pair (UTP)
Voice Grade Communications Cable
Suitable for Telephony and Security Systems
AWG24 Solid Copper Conductors
Flame Retardant–Type CM, CMG, CMH
Suitable for Indoor Installations
UL/cUL, CSA, ETL Listed
Supplied in 1000' Pull Boxes

