



S7830 First Out Expanded Annunciator



Microprocessor-based expanded annunciator to support the 7800 SERIES relay modules for first-out annunciation, sequencing, system or self-diagnostics and troubleshooting.

- Twenty-six status LEDs.
- Front panel LED array-arranged to indicate flow of line-voltage through string of limits, controls and interlocks.
- Selectable current and first-out LED array display status.
- Twenty-one monitored contact points.
- Access for external electrical voltage checks.

Dimension Diagrams

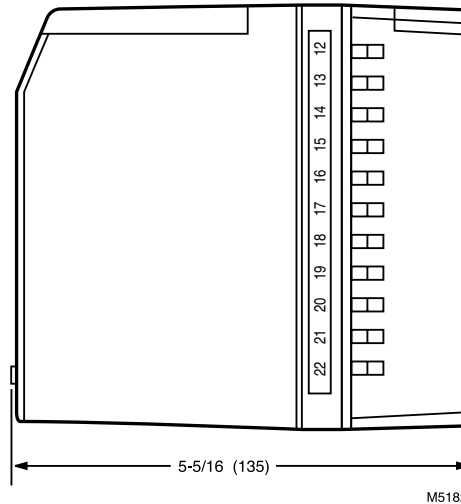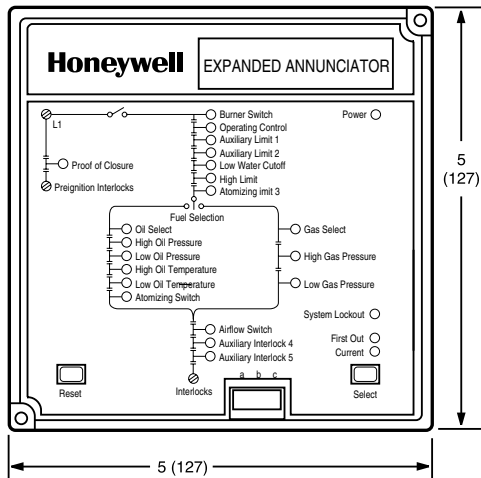

Ambient Temperature Rating: -40 F to 140 F (-40 C to 60 C)
Vibration: 0.5 G environment
Weight (lb): 1 lb. 6oz (0.6k)
Approvals:
Canadian Standards Association: Certified, File No. LR95329.

FCC Emissions: FCC Part 15, Class B, Emissions.
Industrial Risk Insurers: IRI Acceptable.
Underwriters Laboratories, Inc: File No. MH17367; Guide No. MJAT.
Required Components: 7800 SERIES Relay Modules and Q7800A, B Subbases

Product Number	Electrical Ratings, Power Supply (Vac)	Electrical Ratings, Power Supply (Hz)	Description
S7830A1005	120 Vac (+10/-15%)	50/60 Hz (±10%)	Expanded Annunciator