

PRINT

E-330

The E-330 burden carrier stands out with superior maneuverability and safety.

Batteries are located on the rear to increase weight on the traction drive, enhancing the braking performance with a short stopping distance.

Steering is smoother thanks to less weight on the front axle.

96" long deck option provides more cargo space.

Front brake option increases capacity to 3000 lb.

Roll-out battery option facilitates battery maintenance.

Benefits

VERSATILITY. Powerful 10 hp motor for trailer towing.

SAFETY. Shorter stopping distance thanks to rear batteries.

MANEUVERABILITY. Short turning radius, less weight on the front axle.

COMFORT. Bucket seats on slide adjusters.

STURDINESS. 14-G diamond-plate steel body, tubular frame.

DURABILITY. Optional bolt-on front bumper.

PRODUCTIVITY. 3000 lb. capacity with optional front brakes.


BATTERY EFFICIENCY. Optional DC/DC converter to equalize battery cells.

MOTREC
Industry driven
www.motrec.com



E-330

Dimensions

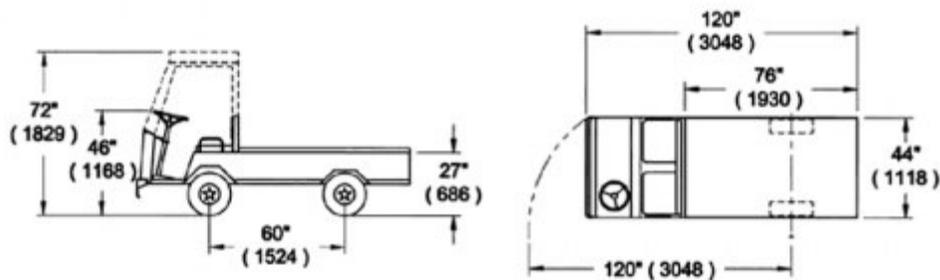

Technical specs

Type	36-volt Burden Carrier
Capacity	*2,400 lb. (1,090 kg), *3,000 lb. (1,360 kg) with front brakes
Speed (Max)	10 mph (16 km/h)
Motor	10 hp
Controller	Electronic speed controller
Battery	Six 6V-220AH batteries
Charger	25 amp, built-in, automatic
Transmission	Direct drive
Drive axle	Helical gear differential
Brakes	Rear hydraulic drum brakes, optional front disc brakes
Steering	Automotive steering wheel
Suspensions	Dual leaf springs on front and rear
Seats	Two bucket seats on slide adjusters
Indicators	Battery status indicator
Safeties	Deadman seat switch, optional reverse alarm
Lights	Dual headlights, dual tail/brake lights
Accessories	Horn
Wheels	5.7x8 LRC pneumatic tires
Unit Weight	1,400 lb. (636 kg) with batteries
Options	Reverse alarm. Bolt-on front bumper, 1/4" plate steel. Front disc brakes. 36VDC/12VDC converter for accessories. 6V-244AH batteries. Digital battery status indicator, hour meter . Maintenance meter. Strobe light. Turn signals. Roll-out battery box, dolly. Ambulance. Fire truck. People mover. Welding truck. Maintenance truck.
Standard	Conforms to requirements for type E as stated in UL 583 and ANSI B56.8
Notes	*includes 200 lb. per passenger. Specifications and standard equipment are subject to change without notice.



MOTREC
Industry driven
www.motrec.com