SUPER SPRAY FAST Adhesive Applicating System

Our new, improved Super Sprayfast incorporates an acetal/teflon diaphragm pump circulating system and surge tank to provide quick, easy and even spray, with minimal overspray.



Ease of Operation

Place the pump (factory mounted to the cover) on top of the adhesive container. Attach the air-line to the Super Sprayfast pump. The pump is selfpriming and charges the spray gun quickly. A 15-foot hose gives the operator plenty of freedom of movement.

Versatile

The Super Sprayfast is designed for use with 5 gallon pails or 55 gallon drums. The system is shipped with a drum or pail cover; depending upon which unit you order. Additional covers are available.

Quick Clean-Up

Simply disconnect the air and depress the trigger switch to relieve fluid pressure. Submerge the spray gun and air cap in water. For extended clean-up, hook up the Super Sprayfast to a container of warm water and activate the trigger switch.

Reliable

The acetal and teflon air operated diaphragm pump coupled with the circulating system keeps the adhesive fresh. The built in surge tank helps maintain an even spray. The spray gun is constructed of aluminum and stainless steel to resist corrosion.

Safe

The Super Sprayfast has been designed for use with Duro Dyne's WIT, WSA and SSG water base adhesives. These adhesives are nonflammable and contain zero solvents. No venting is required.

 Duro Dyne East Division, Farmingdale, NY
 631-249-9000 Fax: 631-249-8346

 Duro Dyne Midwest Division, Fairfield, OH
 513-870-6000 Fax: 513-870-6005


 Duro Dyne West Division, Santa Fe Springs, CA
 562-926-1774 Fax: 562-926-5778

 Duro Dyne Canada, Lachine, Quebec, Canada
 514-422-9760 Fax: 514-636-0328

www.durodyne.com E-mail: durodyne@durodyne.com



test.p65 11/14/2001, 4:16 PM

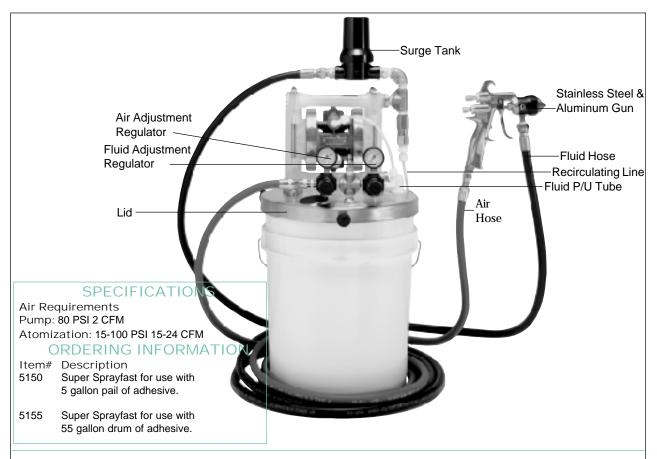

The Super Sprayfast is specifically designed for use with Duro Dyne's Water-Base Adhesives.

SSG Waterbased Insulation Adhesive

Type: Ethylene Vinyl Acetate Emulsion

Color: Cream White Weight: 10.0 lbs. per gallon Odor: Bland Solids: 69%±2%

Viscosity: 1400 CPS, (Brookfield LVF #7 6 RPM @ 25°C) Flammability: Non-Flammable Effect of Freezing: Keep from freezing Shelf Life: 6 months @ 70°F Service Temperature Range: -40° - 200°F

Clean-up: Warm water/detergent Availability: 5 gallon pails.



ORDERING INFORMATION

Item# 5035 SSG-5 5 Gal. Cans

WIT

Waterbased Insulation Adhesive

Type: Resin Emulsion Color: White Weight: 9.8 lbs. per gallon Odor: Bland

Solids: 57%±2% Viscosity: 1600-1800 CPS. Typical at 1800. (Brookfield LVF #4 Spindle, 6 RPM @ 25°C)

Flammability: Non-Flammable
Effect of Freezing: No damage - 1 cycle
Shelf Life: 6 months @ 70°F

Service Temperature Range: -40° - 200°F Clean-up: Water/Detergent

Availability: 1 gallon buckets, 5 gallon pails

and 55 gallon drums.



ORDERING INFORMATION

 Item# 5056
 WIT-1 1 Gal. Buckets

 Item# 5057
 WIT-5 5 Gal. Pails

 Item# 5058
 WIT-55 55 Gal. Drums

WSA

Waterbased Insulation Adhesive

Type: Resin Emulsion

Color: Grey
Weight: 9.8 lbs. per gallon

Weight: 9.8 lbs. per gallon Odor: Bland Solids: 57%±2%

Viscosity/Extrusion: 1600-1800 CPS.

Typical at 1800.

(Brookfield LVF #4 Spindle, 6 RPM @ 25°C)

Flammability: Non-Flammable Effect of Freezing:No damage - 1 cycle Shelf Life: 6 months at 70°F.

Service Temperature Range: -40 $^{\circ}$ - 200 $^{\circ}$ F

Clean up: Water/Detergent

Availability: 5 gallon pail, 55 gallon drums.



ORDERING INFORMATION

Item# 5036 WSA-5 5 Gal. Pails **Item# 5037** WSA-55 55 Gal. Drums

test.p65 2 11/14/2001, 4:16 PM