

# NP Mobile Series

## NP41, NP61 and NP62\* digital projectors

The world's most portable, high-brightness projectors, sporting a footprint smaller than a hardcover book, the NP41, NP61 and NP62 are bright, powerful and packed with technological innovations.

### EVERYTHING IS AUTOMATIC TO MAKE PRESENTING EASY FOR YOU

- **Automatic startup** powers on the projector as soon as it is plugged into a power outlet
- **Automatic focus** instantly provides a sharp detailed image. You don't need to make any adjustments as the projector automatically focuses for you.
- **Automatically detects source** and projects the image with auto input selection
- **AutoSense™** intuitively syncs the projector with most computer signals and features one-touch image optimization
- **Automatic vertical keystone correction technology** instantly projects a square image even when the projector is set up at a steep offset angle to the screen
- **Instant shutdown** enables projector to be turned on and off from a wall switch or power strip. Quick startup and instant shut down enables "the show" to start and end according to your schedule.
- **Auto Power ON** via the RGB (15-pin) input connector when a signal is detected from a computer

### ADAPTABLE TO VIRTUALLY ANY APPLICATION

- **High brightness up to 3000 lumens** packed into a projector weighing a mere 3.5 - 3.7 pounds
- **Built-in wall color correction presets** provide for adaptive color tone correction to display properly on non-white surfaces
- **Aspect ratio control** enables you to display in three modes: normal, cinema & native
- **HD compatibility** supports 1080i, 720p, 576p, 480p, 576i & 480i
- **Audio Input** via the stereo mini connector brings presentations to life
- **USB port** provides computer-free presentation capabilities using a USB thumb drive. Send images directly from a phone or computer using the optional Bluetooth adapter.

### LOW COST OF OWNERSHIP WHILE EXTENDING THE LIFE OF THE PROJECTOR

- **Extended lamp life with ECO Mode™ technology** that increases lamp life by up to 40% for up to 3500 hours
- **Power management** can be set to automatically shut off the projector when an incoming signal is not detected
- **Enhanced multi-level security** features protect your investment
  - Integrated lock slot - attach security cable to physically lock down the projector
  - Cabinet control lock - setting to deactivate buttons on cabinet to prevent unwanted changes to projector settings
  - Password protection restricts unauthorized use of projector
- **Quiet operation** at < 32dB in ECO Mode

\* shipping in November 2008




### Series Features and Benefits

- HIGH BRIGHTNESS
- UP TO 3000 LUMENS
- LIGHTWEIGHT - ONLY 3.5 - 3.7 LBS.
- AUTOMATIC FOCUS
- QUICK STARTUP AND INSTANT SHUT DOWN
- HIGH CONTRAST
- AUTOMATIC SOURCE SELECTION
- ADVANCED VIDEO PROCESSING
- AUTOMATIC KEYSTONE CORRECTION
- CARRYING CASE INCLUDED



Note: Input panel applies only to NP41/NP61

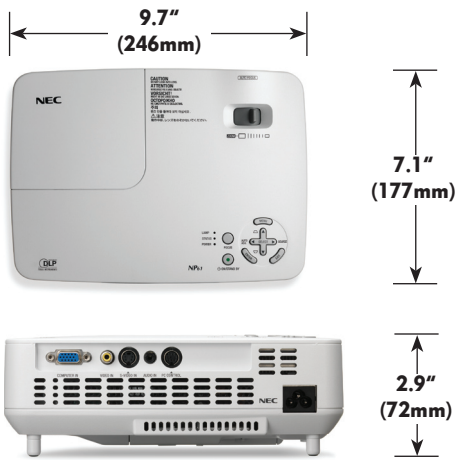

### ADDITIONAL FEATURES

**Advanced video processing** with IP conversion and 3-2/2-2 pull down provides error-free interpolation for moving video resulting in a smooth image with greater detail

**BrilliantColor™ technology** can dramatically increase system brightness and color saturation at mid and low video levels, while optimizing color gain across the full color gamut

**VORTEX™ Technology Plus** breakthrough image processing technology improves white level, color accuracy, dynamic range and varying levels of black in an image

**PC control port** enables external control of the projector using a computer or control system RS-232C (Mini DIN 8 pin)

**Kensington lock slot** enables a security cable to be attached to the projector

**64-step image magnification** with location control

**Sleep timer** can be set to automatically turn off the projector

**Direct power off** protects the lamp by enabling the cooling fan to continue running after power is disconnected

### IN THE BOX

Carrying case, remote control, batteries, power cord, RGB signal cable, lens cap, user's manual on CD-ROM, quick start guide, product registration card

### WARRANTY

Registered owners receive a 2-year parts and labor warranty including the first year of InstaCare. The lamp is covered for one year or 500 hours, whichever comes first. InstaCare provides the original owner one year of either limited 3-business-day repair/return or next-business-day exchange.



### Specifications for NP41/NP61/NP62

<b>OPTICAL</b>	
Display Technology	DLP (0.55" DMD)
Resolution	XGA 1024 x 768 UXGA 1600 x 1200
Native Maximum	NP41: 2300 normal / Eco = approx. 85% of normal mode NP61/NP62: 3000 normal / Eco = approx. 75% of normal mode
Light Output (lumens)	1600:1
Contrast Ratio (up to)	NP41: 200W AC / 170 eco NP61/NP62: 220W AC / 170 eco
Lamp Type	2500 hours normal / 3500 hours eco
Lamp Life (up to)	33 to 300 in. / .84 to 7.62m
Screen Size (diagonal)	1.8 to 2.2
Throw Ratio	4.8 to 44 ft. / 1.45 to 13.4m
Projection Distance	12.3 to 12.6° tele / 14.7 to 15° wide
Projection Angle	
Lens	
Zoom	1 to 1.2
Focus	Automatic/Manual
F-number	F = 2.2 to 2.34mm, f = 20.4 to 24.5mm
Keystone Correction	Automatic or manual +/- 16°
<b>SIGNAL COMPATIBILITY/CONNECTIVITY</b>	
Scan Rate	Horizontal 15 - 100 kHz (RGB: 24 - 100 kHz) Vertical 50 - 120 Hz (above 85 Hz = 1024 x 768 or lower)
Supported Video Standards	NTSC, NTSC 4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM
SD/HD Video Signal Compatibility	480i, 480p, 576i, 576p, 720p, 1080i
PC Signal Compatibility	VGA, SVGA, XGA, SXGA, SXGA+, UXGA
Macintosh Compatibility	Yes
Input/Output Terminals	
RGB (analog)	15-pin
Video 1	RCA
Video 2	S-Video
Audio	Mini stereo
USB Port	Type A (NP62 only)
External Control	RS-232, IR, mini DIN 8-pin
Sync Compatibility	Separate Sync / Composite Sync / Sync on G
<b>ELECTRICAL</b>	
Power Requirements	100 - 240V AC, 50/60 Hz
Input Current	NP41: 3.1/1.2A NP61/NP62: 3.5/1.4A
Power Consumption	
Normal Mode/ECO Mode/Standby (Power Saving)	NP41: 265W / 225W / 5W NP61: 285W / 225W / 5W NP62: 300W / 235W / 5W
<b>MECHANICAL</b>	
Installation Orientation	Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear
Dimensions (WxDxH)	9.7 x 7.1 x 2.9 in. / 246 x 177 x 72mm
Net Weight	NP41/NP61: 3.5 lbs. / 1.6 kg NP62: 3.7 lbs. / 1.7 kg
Fan Noise	37dB normal / 32dB eco
Regulations	USA UL 1950 FCC Class B, Canada CSA 950 (C-UL), NOM
<b>ENVIRONMENTAL</b>	
Operational Temperature	41° - 104°F / 5° - 40°C
Humidity	20 - 80% non-condensing
Storage	-14° - 122°F / -10° - 50°C
<b>ACCESSORIES</b>	
IR-RCYR	IR receiver enables PJ remote to control PC or Mac functions
WPA001	802.11b/g wireless adapter connects to projector to receive data from wireless PC
SPKR30	Amplified 30-watt speaker for connection to PJ, microphone or video source
SC200	Security cable attaches to PJ lock slot
ADP-CV1E	Component video to VGA adapter
LEATHERCASE	Leather case with compartments for laptop and PJ
LEATHERROLLER	Leather rolling case with compartments for laptop and PJ / fits in most airline storage bins
NP40CM	Ceiling mount with adapter plate designed for NP41/61/62
ADJ006009	6.9 in. adjustable extension column for use with PJ mount
ADJ0012018	12-18 in. adjustable extension column for use with PJ mount
ADJ0203	2-3 ft. adjustable extension column for use with PJ mount
ADJ0305	3-5 ft. adjustable extension column for use with PJ mount
SCP100	Adjustable suspended ceiling plate for use with ceiling mount
NP08LP	Replacement lamp for NP41
NP09LP	Replacement lamp for NP61/62
RMT-PJ23	Replacement remote control
PWRCRD-NP40	Replacement power cord
RGBCBL-PJPX	Replacement RGB signal cable
VLIC03	Extend term of InstaCare service program to 3 years
VLMT-C02	3-year international service program provides U.S. and Canadian customers loaner and repair services in EU, Japan and Australia
NECECO	Recycling program for NEC and non-NEC PJ that weigh less than 40 lbs.

AutoSense, ECO Mode and VORTEX are trademarks of NEC Display Solutions. BrilliantColor is a trademark, and the DLP logo is a registered trademark of Texas Instruments. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change. 7/08 ver. 1.

©2008 NEC Display Solutions of America, Inc. All rights reserved.

### NEC Display Solutions

500 Park Boulevard, Suite 1100  
Itasca, IL 60143  
866-NEC-INFO

# NEC