


■ Monitoring  
For *Business-Critical Continuity™*

## Alber CELLCORDER® CRT-400 Cell Resistance Tester

Technology That Lets You Trust Your Batteries

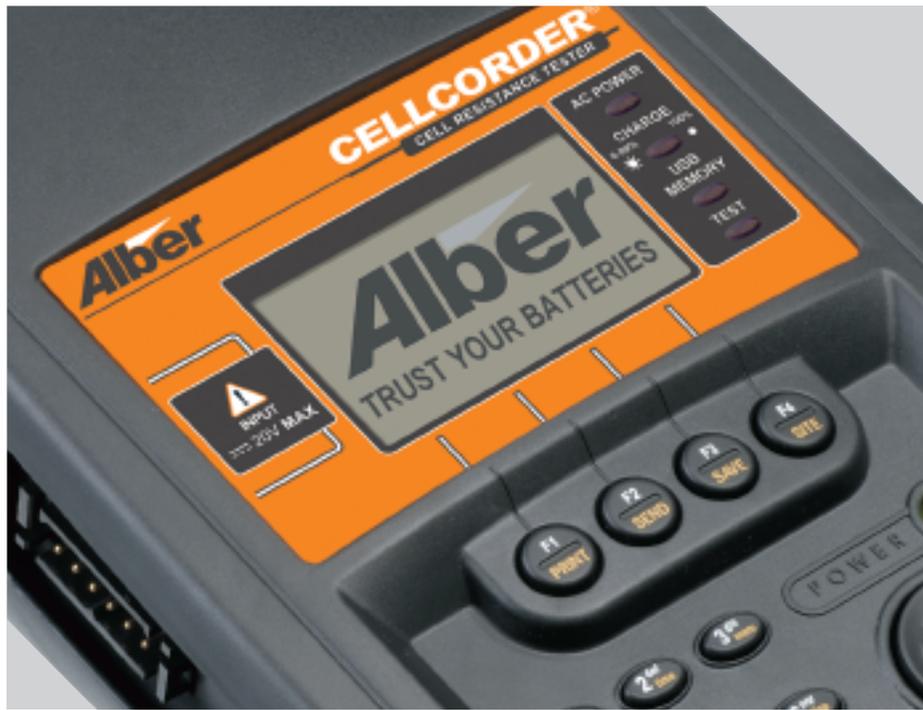

## CELLCORDER® CRT-400 Cell Resistance Tester


The CELLCORDER® CRT-400 Cell Resistance Tester was specially designed to strictly comply with IEEE standards for testing batteries online. When a battery is tested online, the test is subjected to ripple from the charger, which makes ohmic measurement tests complicated. The well-proven Alber DC resistance test method completely eliminates these distorting factors. The Cellcorder outstrips competitive testing instruments by producing very high repeatability in testing. The Cellcorder comes with easy keyboard entry, hard shell carrying case, AC charger, data trending and analysis software and a user-friendly manual. An optional IR printer is available.

### Advantages and Features

- Patented Internal Resistance testing eliminates inaccuracy
- New graphical display makes menu navigation easy
- Measures cell voltage and internal battery resistance as well as intercell resistance
- Flash drive can be used to transfer data to your PC
- Battery Analysis PC software lets you identify bad cells, create reports and archive data
- IrDa allows wireless communication with a variety of peripheral equipment including compatible DMA-35N-CRT Hydrometer
- Tests batteries from 0-16V
- Includes new battery test clamps with interchangeable jaws

### The New CELLCORDER® at a glance.


Lightweight, stylish, rugged and durable. Special features include new user friendly operation, Bluetooth, modem, graphical transreflective LCD display for better contrast, and new cables and clamps.

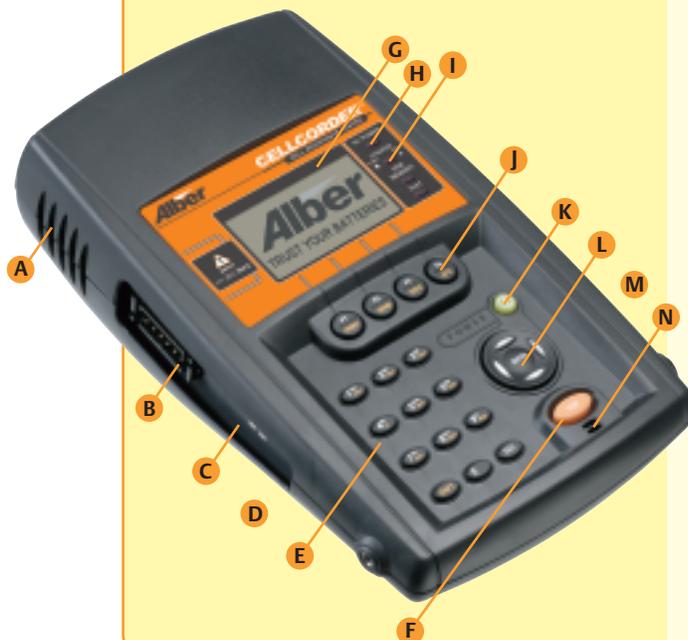


- A Ventilation:** Temperature controlled colling fan.
- B Test Lead Connector:** Molded test cables and optimized battery clamps.
- C Bluetooth® Capable:** audible voice status during testing and data transfer to your PC.
- D Shoulder Strap:** (not shown) Adjustable shoulder strap for safe and efficient testing.
- E Keypad:** Combination keypad for alphanumeric data entry. Shift key for quick function keys.
- F Test Key:** Initiates the test sequence.
- G Transreflective LCD:** Backlit graphical LCD display with excellent contrast. Improved contrast in direct sunlight.
- H AC Power Indicator:** Illuminated when connected to AC power.
- I Battery Charge Indicator:** Indicates battery charging progress.
- J Multi Function Menu Buttons:** Interactive buttons that correlate to relevant menu alternatives on screen.
- K Power On/Off:** Press for start-up. Press and hold for shut down.
- L Navigation Key:** Easily navigate and select choice in menus.
- M Infrared Port:** (not shown) Wireless IrDA communication to printer, PDA, DMA-35N-CRT Hydrometer or laptop.
- N Beeper:** Alerts valid entry or faulty test results.



(Shown with optional accessories)

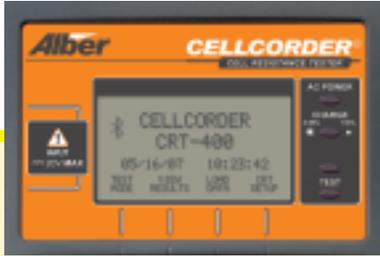

The new graphical display makes it easier to navigate through the menus.

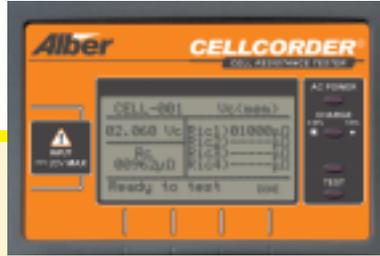


The test screen shows the cell number, internal resistance, voltage and four intercell connections.

## Using The CELLCORDER. A World Of Possibilities...



The Flash Drive holds the measurements and can be used to transfer data to a PC.

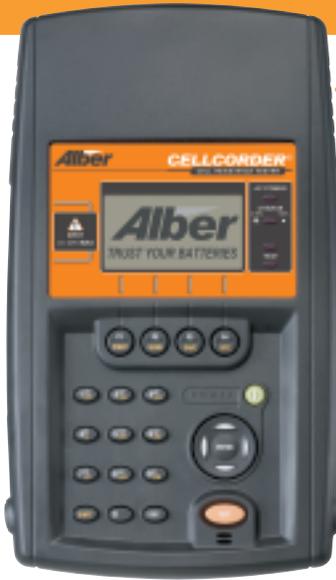

IrDA Infrared



Download data from the Hydrometer.

Bluetooth (option)




Communicate with laptops or headsets.


IrDA Infrared



Print on site using non-impact printer.

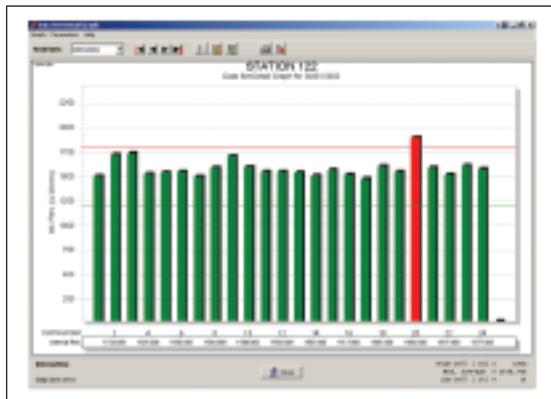

The Battery Analysis Software helps you identify bad cells, generate descriptive reports and archive data.

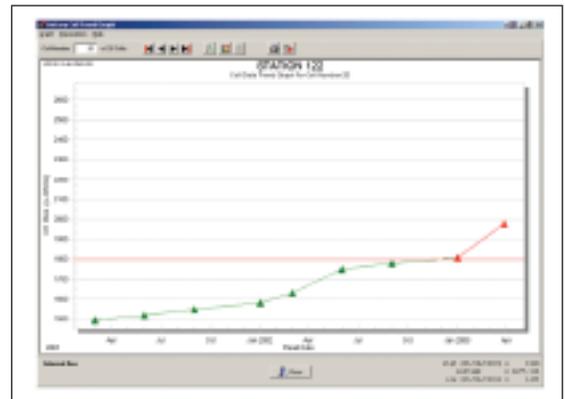

Measurements are stored and presented to allow trending and make it possible to detect early performance degradation in individual battery cells.

# Ensuring The High Availability Of Mission-Critical Data And Applications.

## Alber CELLCORDER® CRT-400 Specifications

Physical		Battery		
Dimensions	H 305mm (12") x W 178mm (7") x D 76mm (3")	Type	4 cell - 8800 mAh lithium ion	
Weight	1.5Kg (3.4lb)	Voltage	4.2V	
Keypad	Rubber keys with polyurethane coating	Charge Time	8 hrs	
Display		AC Adapter		
Type	LCD - STN Reflective	Input Voltage	90 - 264 VAC	
Viewing Area	2.619" x 1.309"	Output Voltage	5 VDC	
Resolution	Graphics LCD 128 x 64	Output Current	4.0 Amps	
Viewing Angle	40°	Frequency	47 - 63 HZ	
Backlight	White LED	Environmental		
Memory		Temperature Range:		
Type	USB Flash Drive	Operating	0° - 40° C (32° - 104° F)	
Storage Capability	1 MB per 71 strings with 256 cells	Storage	-20° - 60° C (-20° - 140° F)	
Data retention	10 years		For extended periods <25° (<77° F)	
Communication		Humidity Range	0% to 80% RH (non-condensing) at 0° - 31° C	
Infrared	PC Interface for data transfer Physical IrDA compliant for printer interface		0% to 50% RH (non-condensing) at 32° - 40° C	
Bluetooth (option)	PC interface for data transfer Earpiece interface for voice test status	Insulating Category II		
		Pollution Degree 2		
		Altitude	0 to 2000 meters above sea level	
Input	Test Current	Resistance Resolution ±0.1% of reading	Voltage Resolution	Intercell Range/Resolution
2V	50A	±5µΩ	0.1% ± 1mV	2mΩ ± 2µΩ
4-6V	25-30A	±25µΩ	0.1% ± 3mV	3.3mΩ ± 5µΩ
8-12V	30-35A	±75µΩ	0.1% ± 6mV	5mΩ ± 10µΩ
16V	5A	±400µΩ	0.1% ± 10mV	20mΩ ± 20µΩ
Warranty				
1-year limited warranty				
Ordering Information				
1000-056	Cellcorder including software, carrying case, USB Flash drive, battery charger, cables, test and voltage leads.			
Optional Accessories		Optional Accessories		
1000-056BT	CRT with Bluetooth option	2120-053 A	JAWS (see www.alber.com)	
2025-036	Bluetooth wireless headset	2120-056	JAWS (see www.alber.com)	
2025-124	Printer with IrDA interface	2120-057	JAWS (see www.alber.com)	
Various	Spike probe options	2120-058I	JAWS (see www.alber.com)	
2030-004	USB Flash Drive			

\* Specifications subject to change without notice    Made in U.S.A.

## Liebert Corporation

1050 Dearborn Drive  
P.O. Box 29186  
Columbus, Ohio 43229  
800 877 9222 Phone (U.S. & Canada Only)  
614 888 0246 Phone (Outside U.S.)  
614 841 6022 FAX

Via Leonardo Da Vinci 8  
Zona Industriale Tognana  
35028 Piove Di Sacco (PD)  
Italy  
39 049 9719 111 Phone  
39 049 5841 257 FAX

Emerson Network Power Asia Pacific  
7/F., Dah Sing Financial Centre  
108 Gloucester Rd, Wanchai  
Hong Kong  
852 25722201 Phone  
852 28029250 FAX

## liebert.com

### 24 x 7 Tech Support

800 222 5877 Phone  
614 841 6755 (outside U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2007 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

® Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

SL-29204 (R06/07)    Printed in USA

## Emerson Network Power.

The global leader in enabling *Business-Critical Continuity*™.

- AC Power
- Embedded Computing
- Outside Plant
- Racks & Integrated Cabinets
- Connectivity
- Embedded Power
- Power Switching & Controls
- Services
- DC Power
- **Monitoring**
- Precision Cooling
- Surge Protection

*Business-Critical Continuity*, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2007 Emerson Electric Co.

## EmersonNetworkPower.com