

Liebert XDH™ Horizontal Row Cooler

Cooling For High Heat Density Equipment

The modular, Liebert XDH Horizontal Row Cooler provides efficient and economical cooling for high heat density equipment. The Liebert XDH is placed in line with rack enclosures and air from the hot aisle is drawn in through the rear of the unit, cooled, and discharged into the cold aisle where the electronic equipment air inlets are located. The Liebert XDH draws directly from the hot aisle, allowing the unit to take advantage of higher heat transfer efficiency.

The Liebert XDH is a part of our high heat-density cooling product family that utilizes pumped refrigerant technology. The pumped refrigerant operates at low pressure in the system and becomes a gas at room conditions, making it ideal for use around electronic equipment.

Since the Liebert XD system always provides 100% sensible capacity, the need for humidification is significantly reduced, further reducing energy usage and maintenance.

The modular and adaptive design of the Liebert XDH unit also allows it to be easily added as the demand for cooling increases.



The Liebert XDH Offers Many Benefits:

Reliability:

- Can cool more than 30 kW per rack.
- Dual (A and B) detachable power cords for increased uptime.
- Uses pumped refrigerant which is ideal for use around electronic equipment.
- Two pumped refrigerant circuits.

Flexibility:

- Complements Liebert precision cooling units.
- Optional pre-charged flexible piping with threaded quick connect fittings allows adaptive and scalable expansion without interruption of cooling operations.
- Flexible installation.
- Complete packaged unit includes enclosure, coils, controls, fans and piping.

Low Total Cost Of Ownership:


- Superior cost for cooling per high heat density rack.
- Highly energy efficient.

Liebert XDH Specifications

| Model Size | XDH20 | XDH32 |
|--------------------------------------|--|-----------------------------------|
| Nominal Capacity, 60 Hz ¹ | 22 kW / 6.3 Ton | 30 kW / 8.5 Ton |
| Nominal Capacity, 50 Hz ² | 19 kW / 5.4 Ton | 27 kW / 7.7 Ton |
| Nominal Airflow, 60 Hz | 2500 CFM (4200 m ³ /h) | 4000 CFM (6800 m ³ /h) |
| Nominal Airflow, 50 Hz | 2100 CFM (3500 m ³ /h) | 3300 CFM (5600 m ³ /h) |
| Input Voltage | 120 V, 1 ph, 60 Hz 230 V, 1 ph, 50 Hz | |
| Power Draw | 500 W | 1200 W |
| Full load amps | 4.2 A @ 120V | 10.5 A @ 120V |
| Number of Fans | 6 | |
| Sound Power Level | 81 dBA | 86 dBA |
| Height (unit only) | 78" (1982 mm) | |
| Width | 12" (300 mm) | |
| Depth | 42" (1066 mm) | |
| Weight | 246 lbs (112 kg) | |
| Options | Quick Connect Couplings (for Flexible Piping) Condensate Detection (dry contacts) Diffuser for front air discharge to both sides or to one side. | |


¹ Nominal Capacity Rating @ 55 °F (13 °C) Entering Fluid Temperature and 98 °F (37 °C) Entering Air Temperature. Max Capacity @ 55 °F (13 °C) EFT and 105 °F (40 °C) EAT is 25.5 kW and 34.5 kW, respectively.

² Nominal Capacity Rating @ 55 °F (13 °C) Entering Fluid Temperature and 98 °F (37 °C) Entering Air Temperature. Max Capacity @ 55 °F (13 °C) EFT and 116 °F (47 °C) EAT is 25.5 kW for XDH20 and 34.5 kW @ 108 °F (42 °C) EAT for XDH32.

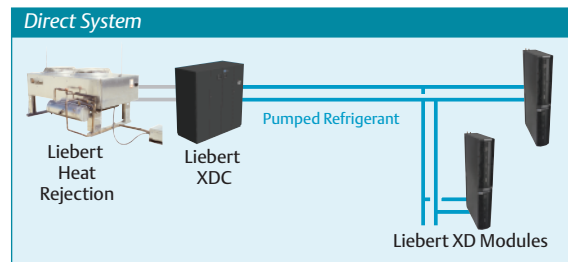


The indoor Liebert XDC Refrigerant Chiller is specifically designed to support Liebert XD cooling modules. The Liebert XDC connects directly to the XD Modules.

When a building chilled water system is available, the Liebert XDP Pumping Unit is utilized as an interface between the pumped refrigerant circuit and the chilled water system.

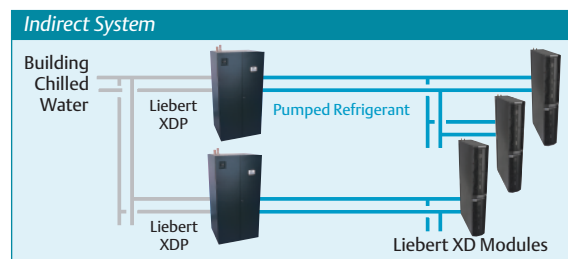

Both the Liebert XDC and the XDP units circulate the refrigerant to Liebert XD units, while maintaining the refrigerant at a temperature always above the actual dewpoint.

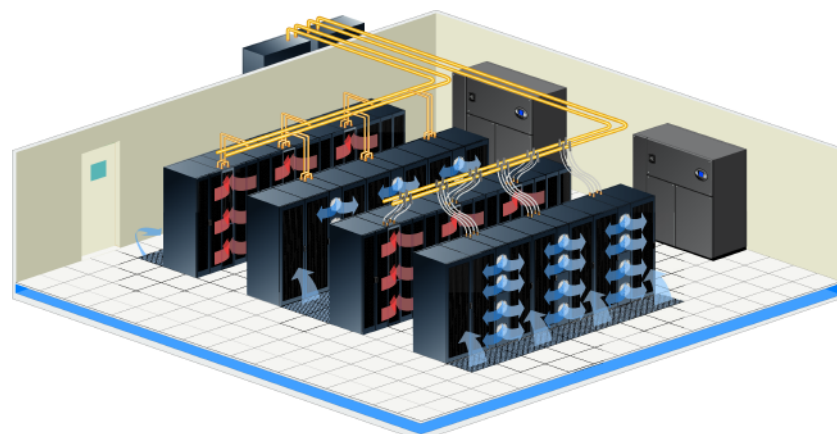

Liebert Corporation

1050 Dearborn Drive
P.O. Box 29186
Columbus, Ohio 43229
800 877 9222 Phone (U.S. & Canada Only)
614 888 0246 Phone (Outside U.S.)
614 841 6022 FAX

Via Leonardo Da Vinci 8
Zona Industriale Tognana
35028 Piove Di Sacco (PD)
Italy
39 049 9719 111 Phone
39 049 5841 257 FAX

Emerson Network Power Asia Pacific
7/F., Dah Sing Financial Centre
108 Gloucester Rd, Wanchai
Hong Kong
852 25722201 Phone
852 28029250 FAX

liebert.com

24 x 7 Tech Support

800 222 5877 Phone
614 841 6755 (outside U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2006 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

SL-17200 (R10/06) Printed in USA

Emerson Network Power.

The global leader in enabling Business-Critical Continuity™.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

Emerson Network Power.com

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2006 Emerson Electric Co.