

Detectable Warning System Aids The Visually Impaired




- Available in four (4) sizes: 2' x 2', 2' x 3', 2' x 4' and 2' x 5'.
- Safety yellow color assists people with severe visual impairment. Black, brick red and custom colors also available.
- Flexible construction conforms to fit dips, slopes and inclines in sidewalks and walkways.
- Can be installed as part of either new construction (Cast-in-Place) or as a retrofit (Surface Mount).
- Ultra-ADA Pads are designed for the visually impaired to feel the raised, truncated domes with their feet. This, in combination with the tapping cane, can alert them to a different surface than the surrounding concrete sidewalk and an upcoming intersection.
- Surface Mount model (Retrofit) installs quickly and easily using adhesive and anchors (included).
- Better slip resistance than composites.
- Better impact resistance than composites.
- UNBREAKABLE.

U.S. Patent Pending

ULTRA-ADA PADS			
SURFACE MOUNT (RETROFIT)			
Size	Yellow	Black	Brick Red
2' x 2' (610 mm x 610 mm)	Part# 0750	Part# 0756	Part# 0760
2' x 3' (610 mm x 914 mm)	Part# 0753	Part# 0759	Part# 0763
2' x 4' (610 mm x 1,219 mm)	Part# 0751	Part# 0757	Part# 0761
2' x 5' (610 mm x 1,524 mm)	Part# 0752	Part# 0758	Part# 0762
CAST-IN-PLACE (WET-SET)			
Size	Yellow	Black	Brick Red
2' x 2' (610 mm x 610 mm)	Part# 0720	Part# 0730	Part# 0725
2' x 3' (610 mm x 914 mm)	Part# 0721	Part# 0731	Part# 0726
2' x 4' (610 mm x 1,219 mm)	Part# 0722	Part# 0732	Part# 0727
2' x 5' (610 mm x 1,524 mm)	Part# 0723	Part# 0733	Part# 0728

- **Complies with the Americans with Disabilities Act (ADA), 49 CFR 37.9.**
Provide tactile warning surfaces which comply with the detectable warnings on walking surfaces section of the Americans with Disabilities Act.
Title 49 CFR Transportation, Part 37.9 Standards for Accessible Transportation Facilities, Appendix A, Section 4.29.2 Detectable Warnings on Walking Surfaces.

CAST-IN PLACE (WET-SET) MODEL

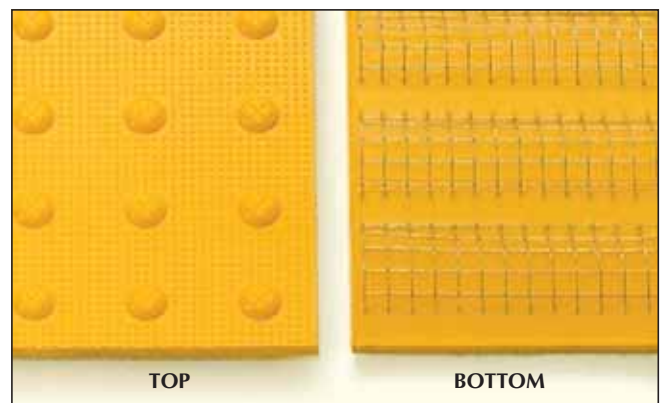

- Heavy-duty, galvanized steel mesh molded into the bottom of the pad, helps secure it to the concrete.
- Pads are quickly and easily installed — simply press into freshly poured concrete until steel mesh is embedded and pad is flush with surface.
- Flexible urethane material bends and conforms to slopes, curves and other irregularities.

