



- **Sales Tip:** Select from a series of standard compounds, or mix and match as needed for very specific application requirements.
- **Where to Specify:** Selected compounds should correspond to the requirements of the application. Where wet or dry anti-fatigue matting is needed for very specific applications in harsh environments.


- Available in the following standard compounds: Fire Retardant, Anti-Bacterial, Industrial Chemical/Oil/Grease Resistant (GSII), ESD Conductive, ESD Dissipative, Brake Fluid Resistant, Non Conductive.
- Base rubber compound is 100% Nitrile (except for Brake Fluid Resistant – EPDM) offering the highest resistance to industrial chemicals, oils, and greases.
- Fire retardant matting passes the federal flammability standard DOC FF 1-70/Meets or exceeds class 1 rating as specified in NFPA Life Safety Code 101 (ASTM E648-03/NFPA 253).
- Anti-Bacterial compound meets or exceeds the following test standards: AATCC 147, ASTM G21, ASTM G22.
- (ESD) Dissipative meets IEC61340-4-1, measured resistance Rg 10<sup>6</sup> – 10<sup>9</sup> Ω, Rp 10<sup>6</sup> – 10<sup>9</sup> Ω.
- (ESD) Conductive meets IEC61340-4-1, measured resistance Rg 10<sup>4</sup> – 10<sup>6</sup> Ω, Rp 10<sup>4</sup> – 10<sup>6</sup> Ω.
- Available in solid or perforated versions for drainage.
- Compatible with Patented M.D. Ramp System (100% Nitrile or EPDM) (Available in Black or Yellow – Dissipative/Conductive ramps in Black only).
- Available with aggressive Silicon Carbide grit coating for long-lasting traction (GSII).
- Easy to snap together mats on-site for custom configurations.
- Overall thickness: 3/4”.



**SOLUTIONS™ STANDARD COMPOUNDS**

Product	Top Surface	Stock Size	Weight (lbs.)
650SFR - Fire Retardant	Perforated	3' x 3'	24
656SFR - Fire Retardant	Solid	3' x 3'	29
850SFR - Fire Retardant/GSII	Perforated	3' x 3'	24
856SFR - Fire Retardant/GSII	Solid	3' x 3'	29
660 - (ESD) Dissipative	Perforated	3' x 3'	24
661 - (ESD) Dissipative	Solid	3' x 3'	29
662 - Anti-Bacterial	Perforated	3' x 3'	24
664 - Conductive	Perforated	3' x 3'	24
665 - Conductive	Solid	3' x 3'	29
663 - Brake Fluid Resistant	Perforated	3' x 3'	24
863 - Brake Fluid Resistant/GSII	Solid	3' x 3'	29
667 - Non-Conductive	Solid	3' x 3'	29

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638

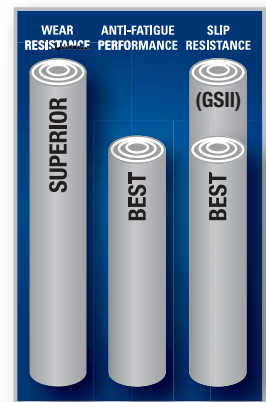

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS