
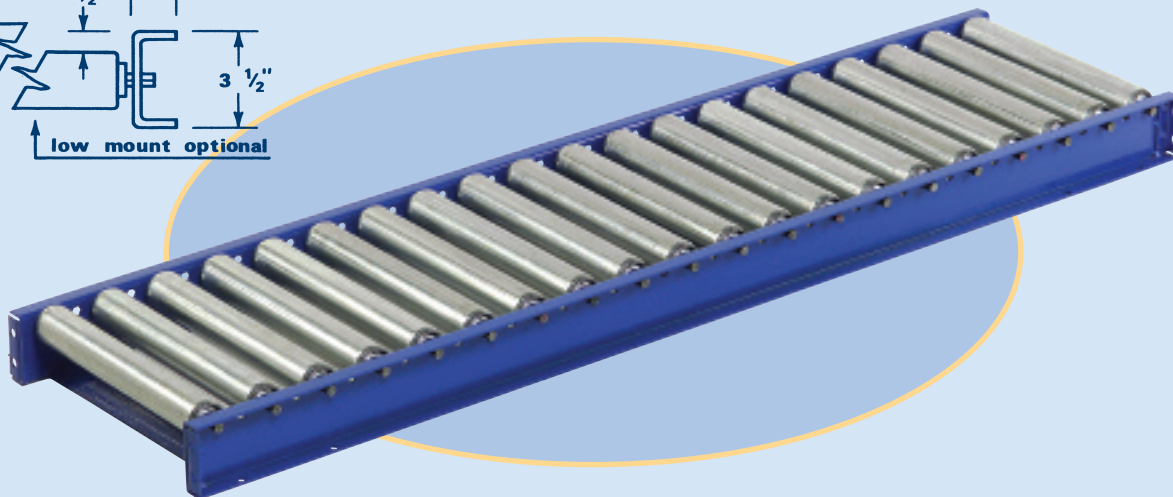


1.9" Medium / Heavy Duty Roller Conveyors

For permanent industrial usage. All-welded construction creates a durable conveyor. Check these superior features in a 1.9" medium duty roller conveyor. 2-1/4" roller centers available. Poly covered rollers available.

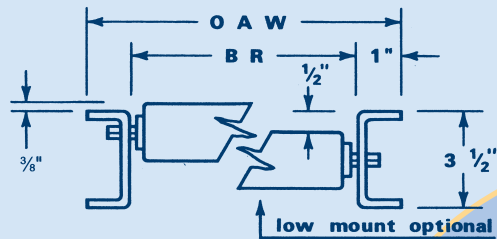

190-SRM SERIES SPECIFICATIONS:

Rollers: 1.9" 16 gauge galvanized steel ♦ Axles: 7/16" Hex, Spring Loaded
 ♦ Frame: 3-1/2" x 1" x 1", 10 Ga. Powder Coated Blue Steel Formed Channel ♦ Welded Cross Braces ♦ Butt Couplers Standard ♦ 10' Frame Capacity: 140 lbs/ft. ♦ 5' Frame Capacity: 500 lbs/ft. ♦ Roller Cap. - 250 lbs.

▶ 190-SRM SERIES

| Roller Centers In | Model No | Over-All Width In | Between Rail Width In | WEIGHT | |
|-------------------|--------------|-------------------|-----------------------|------------------|-------------------|
| | | | | 5 Ft Section Lbs | 10 Ft Section Lbs |
| 3 | 190-SRM-0312 | 12 | 10 | 65 | 130 |
| | 190-SRM-0315 | 15 | 13 | 78 | 156 |
| | 190-SRM-0318 | 18 | 16 | 87 | 174 |
| | 190-SRM-0320 | 20 | 18 | 106 | 192 |
| | 190-SRM-0324 | 24 | 22 | 103 | 205 |
| | 190-SRM-0326 | 26 | 24 | 129 | 234 |
| | 190-SRM-0330 | 30 | 28 | 131 | 262 |
| | 190-SRM-0332 | 32 | 30 | 139 | 277 |
| | 190-SRM-0336 | 36 | 34 | 153 | 305 |
| | 190-SRM-0342 | 42 | 40 | 174 | 347 |
| | 190-SRM-0348 | 48 | 46 | 195 | 389 |
| 4 1/2 | 190-SRM-4512 | 12 | 10 | 52 | 104 |
| | 190-SRM-4515 | 15 | 13 | 59 | 118 |
| | 190-SRM-4518 | 18 | 16 | 69 | 137 |
| | 190-SRM-4520 | 20 | 18 | 82 | 148 |
| | 190-SRM-4524 | 24 | 22 | 87 | 173 |
| | 190-SRM-4526 | 26 | 24 | 99 | 180 |
| | 190-SRM-4530 | 30 | 28 | 110 | 200 |
| | 190-SRM-4532 | 32 | 30 | 115 | 210 |
| | 190-SRM-4536 | 36 | 34 | 126 | 230 |
| | 190-SRM-4542 | 42 | 40 | 138 | 260 |
| | 190-SRM-4548 | 48 | 46 | 150 | 290 |

▶ 190-SRM SERIES (CONTINUED)

| Roller Centers In | Model No | Over-All Width In | Between Rail Width In | WEIGHT | |
|-------------------|--------------|-------------------|-----------------------|------------------|-------------------|
| | | | | 5 Ft Section Lbs | 10 Ft Section Lbs |
| 6 | 190-SRM-0612 | 12 | 10 | 41 | 81 |
| | 190-SRM-0615 | 15 | 13 | 54 | 107 |
| | 190-SRM-0618 | 18 | 16 | 65 | 119 |
| | 190-SRM-0620 | 20 | 18 | 70 | 127 |
| | 190-SRM-0624 | 24 | 22 | 78 | 142 |
| | 190-SRM-0626 | 26 | 24 | 82 | 150 |
| | 190-SRM-0630 | 30 | 28 | 91 | 166 |
| | 190-SRM-0632 | 32 | 30 | 96 | 174 |
| | 190-SRM-0636 | 36 | 34 | 104 | 189 |
| | 190-SRM-0642 | 42 | 40 | 116 | 213 |
| | 190-SRM-0648 | 48 | 46 | 128 | 237 |
| 12 | 190-SRM-1212 | 12 | 10 | 42 | 76 |
| | 190-SRM-1215 | 15 | 13 | 46 | 83 |
| | 190-SRM-1218 | 18 | 16 | 49 | 90 |
| | 190-SRM-1220 | 20 | 18 | 52 | 94 |
| | 190-SRM-1224 | 24 | 22 | 57 | 104 |
| | 190-SRM-1226 | 26 | 24 | 59 | 108 |
| | 190-SRM-1230 | 30 | 28 | 65 | 118 |
| | 190-SRM-1232 | 32 | 30 | 67 | 122 |
| | 190-SRM-1236 | 36 | 34 | 73 | 132 |
| | 190-SRM-1242 | 42 | 40 | 82 | 147 |
| | 190-SRM-1248 | 48 | 46 | 91 | 162 |