



Battery Operated Smoke Alarm with Hush®

Part Number 440375

Model 0916

Hush® Feature


Temporarily silences nuisance alarms.

Red LED

Flashes every 30-40 seconds to indicate that the smoke alarm is operating.

Test Button

Tests unit's electronic circuitry, horn, and battery function.

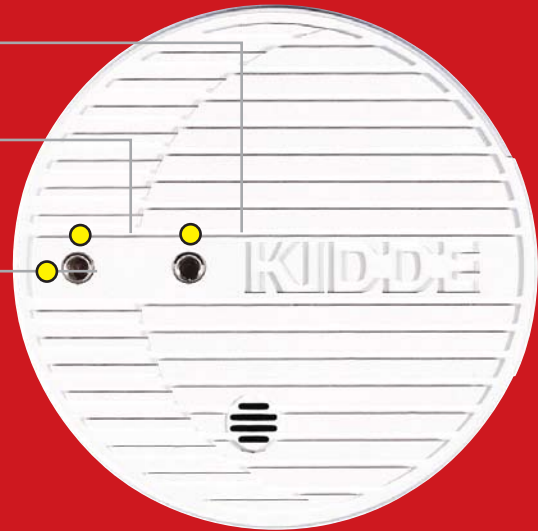

Description

The Kidde 440375 is a battery operated, single station smoke alarm. It is designed to alert you and your family to the dangers of smoke and fire. The 440375 is powered by a 9V battery and offers a Hush® feature that temporarily silences nuisance alarms.

This alarm uses ionization sensing technology. Ionization sensing alarms may detect invisible fire particles (associated with flaming fires) sooner than photoelectric alarms. Photoelectric sensing alarms may detect visible particles (associated with smoldering fires) sooner than ionization alarms.

Kidde strongly recommends that both ionization and photoelectric smoke alarms be installed to help insure maximum detection of the various types of fire that can occur within the home.

The Kidde 440375 battery operated, single station smoke alarm provides an early warning signal to you and your family in the event of a smoke or fire incident. The 440375 operates on a 9V battery power source that provides continuous protection even during a power outage. Installation is simple with the Twist-Off Mounting Plate and requires no wiring. The 440375 includes a Tamper Resist Locking Pin that helps deter battery and alarm theft and a Hush® control feature that will temporarily silence nuisance alarms. This feature is useful in the kitchen area or other areas prone to nuisance alarms.


Features and Benefits

- **Hush® Feature** – Temporarily silences nuisance alarms.
- **Red LED** – Flashes every 30-40 seconds to indicate that the smoke alarm is receiving power.
- **Test Button** – Tests unit's electronic circuitry, horn, and battery function.
- **Battery Operated (9V battery included)** – Protects even during power outages.
- **Tamper Resist Locking Pin** – Helps deter from theft or tampering.
- **Low Battery Indicator** – Smoke alarm will chirp in the event of a low battery.
- **Twist-Off Mounting** – For fast installation and easy, safe battery replacement.



Technical Specifications

Part Number:	440375
UPC Number:	0 47871 40375 2
Power Source:	9V Battery (included)
Sensor:	Ionization
Audio Alarm:	85dB at 10ft
Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)
Humidity Range:	5%-95% relative humidity (RH)
Size:	5" in diameter x 1.5" depth
Weight:	1lb
Interconnects:	No
LED:	Red, normal operation
Warranty:	10 year limited

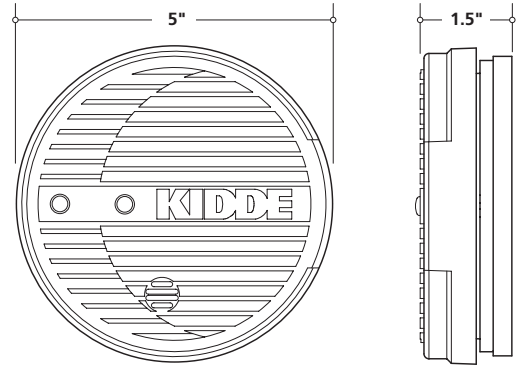

Ordering Information

Clamshell UPC: 0-47871-40375-2

Includes 9V Carbon Zinc Battery

Part Number	I 2 of 5	Pack Quantity	Dimensions (w x d x h inches)	Weight	Case/Skid	Layers/Skid	Skid Weight
440375**	N/A	Individual	7.5 x 1.5 x 11	1lb	N/A	N/A	N/A
44037502	100 47871 40275 9	PDQ (3 units)	7.75 x 6 x 11.75	3.5lbs	105	3	360lbs
440375-16	200 47871 40375 6	Cut Case (20 units)	16 x 20.75 x 11.75	32lbs	18	3	576lbs
440375-37	300 47871 40375 3	Power Tower (60 units)	20 x 24 x 41 (incl. pallet)	96lbs	3	3	96lbs

**Not for sale by individual unit



1016 Corporate Park Drive
Mebane NC 27302
1-800-880-6788
www.kidde.com

Distributed by: