



Battery Operated Smoke Alarm with Hush®

- **Model 0916**
- **Part Number 440375 (Carbon Zinc Battery)**
440377 (Lithium Battery)

Hush® Feature


Temporarily silences nuisance alarms.

Red LED

Flashes every 30-40 seconds to indicate that the smoke alarm is operating.

Test Button

Tests unit's electronic circuitry, horn, and battery function.

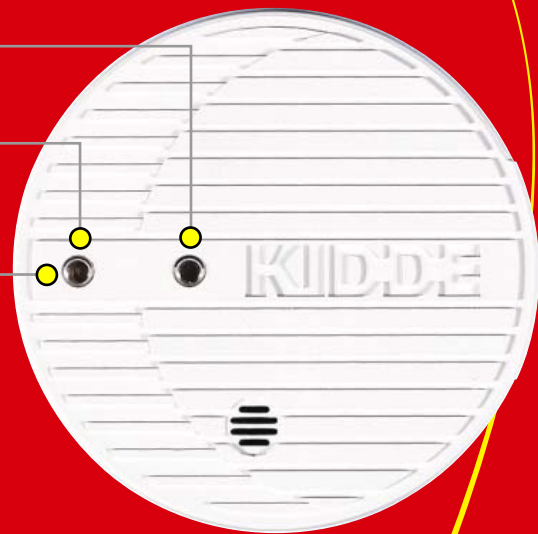

Description

The Kidde 440375 is a battery operated, single station smoke alarm. This unit provides a level of protection that you have come to expect in a Kidde product. The Kidde 440375 is designed to alert you and your family to the dangers of smoke and fire. This smoke alarm features an ionization sensor that protects best against fast flaming and other types of fires. The 440375 is powered by a 9V battery and offers a Hush® feature that temporarily silences nuisance alarms.

Consumer Benefits

The Kidde 440375 battery operated, single station smoke alarm provides an early warning signal to you and your family in the event of a smoke or fire incident. The 440375 operates on a 9V battery power source that provides continuous protection even during a power outage. Installation is simple with the Twist-Off Mounting Plate and requires no wiring. The 440375 includes a Tamper Resist Locking Pin that helps deter battery and alarm theft and a Hush® control feature that will temporarily silence nuisance alarms. This feature is useful in the kitchen area or other areas prone to nuisance alarms.


Features and Benefits

- **Hush® Feature** – Temporarily silences nuisance alarms.
- **Red LED** – Flashes every 30-40 seconds to indicate that the smoke alarm is receiving power.
- **Test Button** – Tests unit's electronic circuitry, horn, and battery function.
- **Battery Operated (9V battery included)** – Protects even during power outages.
- **Tamper Resist Locking Pin** – Helps deter from theft or tampering.
- **Low Battery Indicator** – Smoke alarm will chirp in the event of a low battery.
- **Twist-Off Mounting** – For fast installation and easy, safe battery replacement.



Technical Specifications

Part Number:	440375
UPC Number:	0 47871 40375 2
Power Source:	9V Battery (included)
Sensor:	Ionization
Audio Alarm:	85dB at 10ft
Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)
Humidity Range:	5%-95% relative humidity (RH)
Size:	5" in diameter x 1.5" depth
Weight:	1lb
Interconnects:	No
LED:	Red, normal operation
Warranty:	5 year limited

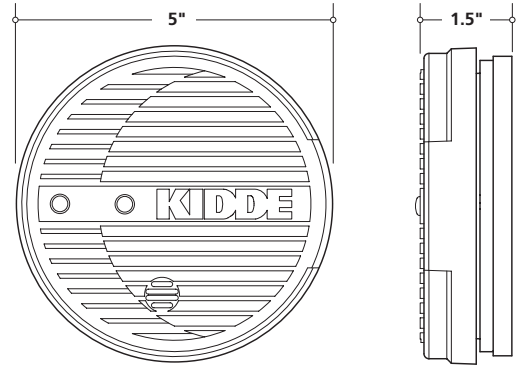

Ordering Information

Clamshell UPC: 0-47871-40375-2

Includes 9V Carbon Zinc Battery

Part Number	I 2 of 5	Pack Quantity	Dimensions (w x d x h inches)	Weight	Case/Skid	Layers/Skid	Skid Weight
440375**	N/A	Individual	7.5 x 1.5 x 11	1lb	N/A	N/A	N/A
44037502	100 47871 40275 9	PDQ (3 units)	7.75 x 6 x 11.75	3.5lbs	105	3	360lbs
440375-020	200 47871 40375 6	Cut Case (20 units)	16 x 20.75 x 11.75	32lbs	18	3	576lbs
440375-060	300 47871 40375 3	Power Tower (60 units)	20 x 24 x 41 (incl. pallet)	96lbs	3	3	96lbs

**Not for sale by individual unit



Ordering Information

Clamshell UPC: 0-25417-00914-9

Includes 9V Lithium Battery

Part Number	I 2 of 5	Pack Quantity	Dimensions (w x d x h inches)	Weight	Case/Skid	Layers/Skid	Skid Weight
440377**	N/A	Individual	7.5 x 1.5 x 11	1lb	N/A	N/A	N/A
440377-02	100 47871 40377 3	PDQ (3 units)	7.75 x 6 x 11.75	3.5lbs	105	3	360lbs
440377-020	200 47871 40377 0	Cut Case (20 units)	16 x 20.75 x 11.75	32lbs	18	3	576lbs
440377-060	300 47871 40377 7	Power Tower (60 units)	20 x 24 x 41 (incl. pallet)	96lbs	3	3	96lbs

**Not for sale by individual unit



1394 South Third Street, Mebane NC 27302
1-800-880-6788 • www.kiddeus.com

Distributed by: